

FLOOD INSURANCE STUDY



MARATHON COUNTY, WISCONSIN AND INCORPORATED AREAS

| Community Name | Community Number |
|--|------------------|
| Abbotsford, City of | 550299 |
| Athens, Village of | 550246 |
| *Birnamwood, Village of | 550413 |
| Brokaw, Village of | 550247 |
| Colby, City of | 550049 |
| *Dorchester, Village of | 550241 |
| Edgar, Village of | 550248 |
| Elderon, Village of | 550249 |
| Fenwood, Village of | 550250 |
| Hatley, Village of | 550251 |
| Kronenwetter, Village of | 550193 |
| Marathon City | 550252 |
| Marathon County (Unincorporated Areas) | 550245 |
| *Marshfield, City of | 550515 |
| Mosinee, City of | 555567 |
| Rothschild, Village of | 555577 |
| Schofield, City of | 555579 |
| *Spencer, Village of | 550315 |
| Stratford, Village of | 550256 |
| *Unity, Village of | 550257 |
| Wausau, City of | 550258 |
| Weston, Village of | 550323 |



*No Special Flood Hazard Areas Identified

EFFECTIVE:
JULY 22, 2010



Federal Emergency Management Agency
FLOOD INSURANCE STUDY NUMBER
55073CV000A

Marathon County, Wisconsin
and Incorporated Areas

NOTICE TO
FLOOD INSURANCE STUDY USERS

Communities participating in the National Flood Insurance Program have established repositories of flood hazard data for floodplain management and flood insurance purposes. This Flood Insurance Study (FIS) may not contain all data available within the repository. It is advisable to contact the community repository for any additional data.

The Federal Emergency Management Agency (FEMA) may revise and republish part or all of this effective FIS report at any time. In addition, FEMA may revise part of this FIS report by the Letter of Map Revision (LOMR) process, which does not involve republication or redistribution of the FIS report. Therefore, users should consult community officials and check the Community Map Repository to obtain the most current FIS components. Selected Flood Insurance Rate Map panels for this community contain information that was previously shown separately on the corresponding Flood Boundary and Floodway Map panels (e.g., floodways and cross sections). In addition, former flood hazard zone designations have been changed as follows.

| <u>Old Zone(s)</u> | <u>New Zone</u> |
|--------------------|-----------------|
| A1 through A30 | AE |
| B | X |
| C | X |

Initial Countywide FIS Effective Date: July 22, 2010

TABLE OF CONTENTS

| | <u>Page</u> |
|---|-------------|
| 1.0 INTRODUCTION | 1 |
| 1.1 Purpose of Study | 1 |
| 1.2 Authority and Acknowledgments | 1 |
| 1.3 Coordination | 3 |
| 2.0 AREA STUDIED | 4 |
| 2.1 Scope of Study | 4 |
| 2.2 Community Description | 6 |
| 2.3 Principal Flood Problems | 6 |
| 2.4 Flood Protection Measures | 8 |
| 3.0 ENGINEERING METHODS | 9 |
| 3.1 Hydrologic Analyses | 9 |
| 3.2 Hydraulic Analyses | 14 |
| 3.3 Vertical Datum | 17 |
| 4.0 FLOODPLAIN MANAGEMENT APPLICATIONS | 18 |
| 4.1 Floodplain Boundaries | 18 |
| 4.2 Floodways | 19 |
| 5.0 INSURANCE APPLICATION | 34 |
| 6.0 FLOOD INSURANCE RATE MAP | 35 |
| 7.0 OTHER STUDIES | 39 |
| 8.0 LOCATION OF DATA | 39 |
| 9.0 BIBLIOGRAPHY AND REFERENCES | 39 |

TABLE OF CONTENTS - continued

Page

FIGURES

| | |
|--|----|
| FIGURE 1 – FREQUENCY – DISCHARGE, DRAINAGE AREA CURVES | 12 |
| FIGURE 2 – FLOODWAY SCHEMATIC | 34 |

TABLES

| | |
|--|----|
| TABLE 1 – INITIAL AND FINAL CCO MEETINGS | 3 |
| TABLE 2 – FLOODING SOURCES STUDIED BY DETAILED METHODS | 4 |
| TABLE 3 – SCOPE OF REVISION | 5 |
| TABLE 4 – LETTERS OF MAP CHANGE | 5 |
| TABLE 5 – SUMMARY OF DISCHARGES | 13 |
| TABLE 6 – MANNING'S “n” VALUES | 17 |
| TABLE 7 – FLOODWAY DATA | 21 |
| TABLE 8 – COMMUNITY MAP HISTORY | 36 |

EXHIBITS

| | | |
|--|--------|-----------|
| Exhibit 1 - Flood Profiles | | |
| Big Rib River | Panels | 01P – 04P |
| Black Creek | Panel | 05P |
| Bull Junior Creek | Panels | 06P – 10P |
| Eau Claire River | Panels | 11P – 14P |
| Jim Moore Creek | Panel | 15P |
| Johnson Creek | Panels | 16P – 18P |
| Little Rib River | Panel | 19P |
| Potato Creek | Panel | 20P |
| Wisconsin River | Panels | 21P – 27P |
| Wisconsin River East Channel | Panels | 28P |
| Exhibit 2 - Flood Insurance Rate Map Index | | |
| Flood Insurance Rate Map | | |

FLOOD INSURANCE STUDY
MARATHON COUNTY, WISCONSIN AND INCORPORATED AREAS

1.0 **INTRODUCTION**

1.1 Purpose of Study

This countywide Flood Insurance Study (FIS) revises and updates information on the existence and severity of flood hazards in the geographic area of Marathon County, including the cities of Abbotsford, Colby, Marshfield, Mosinee, Schofield, and Wausau; the villages of Athens, Birnamwood, Brokaw, Dorchester, Edgar, Elderon, Fenwood, Hatley, Kronenwetter, Marathon City, Rothschild, Spencer, Stratford, Unity, and Weston; and the unincorporated areas of Marathon County (referred to collectively herein as Marathon County). Note that the cities of Abbotsford, Colby, Marshfield, Mosinee, and Schofield, and the villages of Birnamwood, Brokaw, Dorchester, Edgar, Elderon, Fenwood, Hatley, Kronenwetter, Rothschild, Spencer, Stratford, and Weston did not have previous FIS text. Within the geographic area of Marathon County, no Special Flood Hazard Areas have been identified for the City of Marshfield and the villages of Birnamwood, Dorchester, Spencer, and Unity.

The flood-hazard information for the portions of the cities of Abbotsford, Colby, Marshfield, and Unity, and the villages of Birnamwood and Dorchester that lie in Marathon County are included in this FIS report. For flood-hazard information in Clark, Shawano, and Wood Counties, see separately published FIS reports and Flood Insurance Rate Maps (FIRM).

This FIS aids in the administration of the National Flood Insurance Act of 1968 and the Flood Disaster Protection Act of 1973. This FIS has developed flood risk data for various areas of the county that will be used to establish actuarial flood insurance rates. This information will also be used by the communities of Marathon County to update existing floodplain regulations as part of the Regular Phase of the National Flood Insurance Program (NFIP), and will also be used by local and regional planners to further promote sound land use and floodplain development. Minimum floodplain management requirements for participation in the NFIP are set forth in the Code of Federal Regulations at 44 CFR, 60.3.

In some States or communities, floodplain management criteria or regulations may exist that are more restrictive or comprehensive than the minimum Federal requirements. In such cases, the more restrictive criteria take precedence, and the State (or other jurisdictional agency) will be able to explain them.

1.2 Authority and Acknowledgments

The sources of authority for this FIS report are the National Flood Insurance Act of 1968 and the Flood Disaster Protection Act of 1973.

This FIS was prepared to include the unincorporated areas of, and incorporated communities within, Marathon County in a countywide format. Information on the authority and acknowledgments for each jurisdiction included in this countywide FIS, as compiled from their previously printed FIS reports, is shown below.

| | |
|---------------------------|---|
| Athens, Village of | The hydrologic and hydraulic analyses for this study was performed by the U.S. Geological Survey (USGS) for the Federal Insurance Administration, under Inter-Agency Agreement No. IAA-H-9-77, Project Order No. 25. This work was completed in August 1978. |
| Marathon County | The hydrologic and hydraulic analyses for this study was performed by the USGS, for the Federal Insurance Administration, under Inter-Agency Agreement No. IAA-H-17-72. This study was completed in August 1974 and the FIRM from this initial study became effective February 1, 1979. The additional hydrologic and hydraulic analyses for the expanded study were also performed by the USGS, for the Federal Insurance Administration under Inter-Agency Agreement No. IAA-H-9-77. This work, which was completed in April 1979, covered the significant flooding effects of the Big Rib River, Little Rib River, Eau Claire River, Bull Junior Creek, and Johnson Creek, all in the unincorporated areas of Marathon County. |
| Marathon City, Village of | The hydrologic and hydraulic analyses for this study was performed by the USGS for the Federal Insurance Administration, under Inter-Agency Agreement No. IAA-H-9-77, Project Order No. 25. This work was completed in November 1978. |
| Wausau, City of | The hydrologic and hydraulic analyses for this study was performed by the USGS for the Federal Insurance Administration, under Inter-Agency Agreement No. IAA-H-3-73, Project Order No. 3. This work was completed in August 1974. |

For this countywide FIS, digital conversion and re-delineation of special flood hazard areas was performed by CDM Federal Programs Corporation (CDM), under contract

HSFE05-05-D-0027/006. Work was completed October 19, 2007. The hydrologic and hydraulic analyses for this study were developed by the U.S. Army Corps of Engineers (USACE). The digital base mapping information was provided in digital format by Marathon County. This base mapping information was derived from data compiled in 2005. These data meet or exceed National Mapping Accuracy Standards. Users of this FIS should be aware that minor adjustments may have been made to specific FIRM base map features.

The coordinate system used for the production of the FIRM is Universal Transverse Mercator (UTM), North American Datum of 1983 (NAD 83), GRS 80 spheroid. Differences in the datum and spheroid used in the production of FIRMs for adjacent counties may result in slight positional differences in map features at the county boundaries. These differences do not affect the accuracy of information shown on the FIRM.

1.3 Coordination

An initial Consultation Coordination Officer (CCO) meeting is held typically with representatives of FEMA, the community, and the study contractor to explain the nature and purpose of a FIS and to identify the streams to be studied by detailed methods. A final CCO meeting is held typically with representatives of FEMA, the community, and the study contractor to review the results of the FIS.

The dates of the initial and final CCO meetings held for previous FIS for jurisdictions within Marathon County are shown in Table 1, “Initial and Final CCO Meetings”.

TABLE 1 – INITIAL AND FINAL CCO MEETINGS

| <u>Community</u> | <u>Initial CCO Date</u> | <u>Final CCO Date</u> |
|--|---------------------------------|---------------------------------|
| Village of Athens Marathon Co., Unincorporated Areas | March 15, 1977 June 10, 1976 | July 17, 1979 August 6, 1980 |
| Village of Marathon City | * | July 17, 1979 |
| City of Wausau | * | December 16, 1975 |

*Information Not Available

For this countywide FIS, the initial CCO meeting was held September 19, 2006 and was attended by representatives of CDM, the Wisconsin Department of Natural Resources (WDNR), FEMA, and the communities of Marathon County. The results of the study were reviewed at the final CCO meeting held on February 19, 2009 and attended by representatives of CDM, WDNR, FEMA and the communities. All problems raised at that meeting have been addressed in this study.

2.0 AREA STUDIED

2.1 Scope of Study

This FIS report covers the geographic area of Marathon County, Wisconsin, including the incorporated communities listed in Section 1.1. The areas studied by detailed methods were selected with priority given to all known flood hazards and areas of projected development and proposed construction.

All or portions of the flooding sources listed in Table 2, "Flooding Sources Studied by Detailed Methods," were previously studied by detailed methods. The limits of detailed study are indicated on the Flood Profiles (Exhibit 1) and on the FIRM (Exhibit 2).

TABLE 2 – FLOODING SOURCES STUDIED BY DETAILED METHODS

| <u>Stream</u> | <u>Limits of Detailed Study</u> |
|-------------------|--|
| Big Rib River | From its confluence at the Wisconsin River to State Highway 29. |
| Black Creek | From approximately 3,000 feet downstream of Degner Street to approximately 3,500 feet upstream of the City of Athens Dam. |
| Bull Junior Creek | From its confluence at the Mosinee flowage area of the Wisconsin River to approximately 1.9 miles upstream of County Highway X at Town Road. |
| Eau Claire River | From the Brooks and Ross Dam to the upstream side of County Highway N. |
| Jim Moore Creek | From its confluence with the Wisconsin River to approximately 4,300 feet upstream of the Tenth Street bridge. |
| Johnson Creek | From County Highway C to State Highway 153. |
| Little Rib River | From its confluence with Big Rib River to Stettin Drive. |

TABLE 2 – FLOODING SOURCES STUDIED BY DETAILED METHODS
(continued)

| <u>Stream</u> | <u>Limits of Detailed Study</u> |
|-----------------|--|
| Potato Creek | From its confluence at Black Creek to approximately 1,500 feet upstream of Allen Street. |
| Wisconsin River | From approximately 1.3 miles downstream of the Main Street Bridge in the City of Mosinee to approximately 5 miles upstream of Adolph Street in the City of Wausau. |

As part of this countywide FIS, updated analyses were included for the flooding sources shown in Table 3, "Scope of Revision."

TABLE 3 – SCOPE OF REVISION

| <u>Stream</u> | <u>Limits of Revised or New Detailed Study</u> |
|-----------------|--|
| Wisconsin River | From the Dam at Mosinee to the Dam at Rothschild |

This FIS also incorporates the determinations of letters issued by FEMA resulting in map changes (Letter of Map Revision [LOMR], Letter of Map Revision-based on Fill [LOMR-F], and Letter of Map Amendment [LOMA]) as shown in Table 4, "Letters of Map Change."

TABLE 4 – LETTERS OF MAP CHANGE

| <u>Community</u> | <u>Flooding Source(s)/Project Identifier</u> | <u>Date Issued</u> | <u>Type</u> |
|------------------|--|--------------------|-------------|
| City of Wausau | Wisconsin River | May 5, 1999 | LOMR |

For this countywide study, all or portions of Big Sandy Creek, Bull Junior Creek and Tributary, Cedar Creek, Comet Creek, Eau Claire River, Little Eau Claire River, Plover River, Prospect Creek, Skulen Creek, Spranger Creek, Spring Brook, Trappe River, and numerous unnamed streams were studied by approximate methods.

Approximate analyses were used to study those areas having a low development potential or minimal flood hazards. The Zone A floodplain boundaries for the streams listed above in Marathon County were developed using limited detail study techniques. The remaining Zone A floodplain boundaries were digitized and adjusted to fit the best available topographic data. The scope and methods of study were proposed to, and agreed upon, by FEMA and the WDNR.

2.2 Community Description

Marathon County, located in the central part of Wisconsin, is the largest in area of all Wisconsin counties and covers approximately one million acres. The county, named for the Greek battlefield, witnessed its first settlement in the 1830s. Clockwise from the northeast, surrounding counties are Taylor, Lincoln, Langlade, Shawano, Waupaca, Portage, Wood, and Clark. In 1990 and 2000, the U.S. Bureau of the Census reported the population of the area to be 115,400 and 125,834, respectively (Reference 1).

The climate of the area is classified as continental, with long, relatively cold winters and warm summers. Periods with consecutive days of minimum temperatures below zero are not unusual during the months of December, January, and February. Summers are mostly pleasant, but usually have one or more periods with consecutive days with temperatures of 90 degrees Fahrenheit (°F) or more. Precipitation is ample for the economy of the region. Thunderstorms are the principal source of moisture during the summer. Snowfall is extremely variable from one year to the next.

The Wisconsin River is the chief topographic feature in this section of northern Wisconsin. The land surface is moderately hilly, with a relief of approximately 200 feet. The hills are so moderate in slope that most roads are laid out on the rectangular system of section lines. Several quartzite hills, of which Rib Mountain is the highest, are located in Marathon County. Rib Mountain's peak, which is 1,940 feet, rises approximately 640 feet above the surrounding upland. Few natural lakes exist in the county, but reservoirs have been created along the Wisconsin River and some of its tributaries.

Land uses in the county include agriculture, silviculture, light industry, transportation, public utilities, and parks. Most of the floodplains are in open space uses, that is, cropland, woodland, and pasture. Residential development is scattered throughout the county, with most residences being single-family homes on farmsteads located adjacent to villages and towns, and in unincorporated areas, mostly around the outskirts of Wausau.

Marathon County is credited with 377,800 acres of forest land, but the tree cover is generally light. In the sawtimber category, oak, elm, and hard maple trees lead the list; but, a substantial volume of softwoods also exist. Continuing economic development within the study area is expected. Extensive development is not recommended for flood-prone areas.

2.3 Principal Flood Problems

Overall flooding in Marathon County is generally due to high stages on the Wisconsin River.

In the Village of Athens, flooding on Black Creek and Potato Creek has been minor. In the 1930's, reportedly, a dam located just upstream from State Highway 97 on Black Creek failed in Athens, causing severe flooding downstream (Reference 2). The 1930 flood was at peak stream discharge. It is believed that a log jam caused the dam to fail. The most severe floods for Black Creek and Potato Creek in Athens are caused by rain on frozen ground or intense thunderstorms. These storms are normally limited to relatively small areas or narrow bands along cold fronts and squall lines. Floods that are generally less severe are caused by a combination of melting snow and rainfall in the spring. Stream gaging records account for the effect of snowmelt on flooding.

The greatest recorded flood on the Eau Claire River at Kelly (2.0 miles east of Schofield) occurred August 1926 according to USGS records. This flood's recurrence interval is estimated to be between 25 and 50 years. The period of record is from 1914 to 1926 and from 1940 to the present.

In the Village of Marathon City, the maximum recorded discharge on the Big Rib River at the gaging station at Rib Falls was 23,800 cubic feet per second (cfs) on August 31, 1938. This was approximately a 30-year recurrence interval flood, but did very little structural damage at Marathon City because most of the land in the floodplain was agriculture. The Rib Falls gage is located six river miles upstream from Marathon City and was operated from 1925-1957.

The principal flood problem in the City of Wausau is on the south side of town, west of the Wisconsin River and south of East Thomas Street. This area is relatively low and mostly occupied by single-family residences. The greatest flood of record occurred on September 1, 1941, which exceeded the July 24, 1912 flood, which was the highest since 1881. The recurrence interval of the 1941 flood is estimated to about one in 170 years, and that of the 1912 flood to about once in 100 years.

The 1912 flood on the Wisconsin River reached a higher stage than the 1941 flood below the Rothschild Dam because a cofferdam was dynamited to save the main structure. The water rushing from Lake Wausau produced a stage at the downstream side of the dam 1.5 feet higher than that of 1941. The flood discharge in the study reach below the dam would also have been higher during the 1912 flood. Effects of cofferdam failures that occurred upstream from Wausau during the 1912 and 1941 floods on the Wisconsin River are unknown.

Other high flood stages have occurred due to backwater from ice jams. Reportedly, thick ice cover on Lake Wausau in the City of Wausau can catch and accumulate ice coming down the river in early spring, sometimes creating considerable backwater. During the spring of 1973, such a jam backed up the river to nearly the 1-percent annual chance flood stage. Another reported outstanding ice jam under the low railroad bridge over the West Channel of the Wisconsin River, just upstream from the Wausau Dam, caused extensive backwater.

In the City of Wausau, a culvert at a foot crossing in the American Legion Golf Course, approximately 1,900 feet upstream on Jim Moore Creek, is inadequate for passage of even low-magnitude flood flows. It can cause approximately 2.5 feet more backwater on floods of the 10-year recurrence interval and greater.

The Wausau Dam on the Wisconsin River can discharge the 0.2-percent annual chance flood at normal pool elevation at the dam. However, there will be a large increase in stage from the dam to Barker's Island, 0.3 mile upstream, during major floods. The principal cause of this increased flood stage is the presence of a former falls in this reach, now submerged from view by the pool created by the dam. Other causes of high flood stages include the horizontal constriction of the flood flows due to control structures under the Memorial Bridge; further constriction is caused by an adjacent island, as well as the width of the West Channel of the Wisconsin River.

Logs reportedly jammed the Rothschild Dam during the 1941 flood, backing up water approximately 1.7 feet higher than for unobstructed conditions.

2.4 Flood Protection Measures

In Marathon County, more than 750 ponds have been constructed by landowners. The Soil Conservation Service (SCS) has assisted in the design and construction of more than half of these small ponds, with more than 250 having some built-in flood control.

For the Village of Athens, there are no flood protection structures on Black Creek or Potato Creek. There are remnants of an old dam on Black Creek which consist of rip-rap and concrete across the stream. This structure does not have sufficient reservoir capacity for significant reduction of flood peaks or volume.

In the City of Wausau, a minimal amount of flood protection exists. A levee just south of the sewage treatment plant offers some protection from flooding, but has gaps in it. Two dams in the area (The American Can Company Dam in Rothschild and the Wausau Dam in Wausau) are used to control discharge as a means of flood protection. As discussed previously, high flood stages do occur upstream from the Wausau Dam.

Both the Domtar Paper Company levee in the Village of Rothschild, and the City of Mosinee Wastewater Treatment Plant levee were shown to provide protection from the Wisconsin River base flood on previous FIRMs. During this study, it was determined that these levees may not meet the operation and maintenance requirements of Title 44 of the Code of Federal Regulations, Section 65.10 for certification under the NFIP. Therefore, for the purpose of this study, these levees were assumed to be ineffective.

3.0 **ENGINEERING METHODS**

For the flooding sources studied by detailed methods in the community, standard hydrologic and hydraulic study methods were used to determine the flood-hazard data required for this study. Flood events of a magnitude that is expected to be equaled or exceeded once on the average during any 10-, 50-, 100-, or 500-year period (recurrence interval) have been selected as having special significance for floodplain management and for flood insurance rates. These events, commonly termed the 10-, 50-, 100-, and 500-year floods, have a 10-, 2-, 1-, and 0.2-percent chance, respectively, of being equaled or exceeded during any year. Although the recurrence interval represents the long-term, average period between floods of a specific magnitude, rare floods could occur at short intervals or even within the same year. The risk of experiencing a rare flood increases when periods greater than 1 year are considered. For example, the risk of having a flood that equals or exceeds the 1-percent-annual-chance flood in any 50-year period is approximately 40 percent (4 in 10); for any 90-year period, the risk increases to approximately 60 percent (6 in 10). The analyses reported herein reflect flooding potentials based on conditions existing in the county at the time of completion of this FIS. Maps and flood elevations will be amended periodically to reflect future changes.

3.1 Hydrologic Analyses

Hydrologic analyses were carried out to establish peak discharge-frequency relationships for each flooding source studied by detailed methods affecting the county.

The City of Athens, the villages of Athens and Marathon City, and the unincorporated areas of Marathon County have a previously printed FIS report. The hydrologic analyses described in those reports have been compiled and summarized below.

Pre-Countywide Analysis:

The hydrologic analyses for the unincorporated areas of Marathon County on the Wisconsin River near the City of Mosinee were taken from the Mosinee, Wisconsin Flood Insurance Study (Reference 3). For the Wisconsin River in central Marathon County, peak discharges for floods of 10-, 2-, and 1-percent annual chance recurrence intervals were based on data previously developed for the WDNR by the USGS (Reference 4).

For the Big Rib River and Eau Claire River in unincorporated Marathon County, flood frequency data were based on statistical analysis of stage-discharge records from gaging stations operated by the USGS. The Big Rib River gage at Rib Falls (Gage No. 05396000) has 33 years of record and the Eau Claire River gage (Gage No. 05397500) at Kelly has 52 years of record. These analyses followed the standard log-Pearson Type III method as outlined by the U.S. Water Resources Council (WRC) (Reference 5). These discharge-frequency relationships were transformed to other locations on the river using a drainage-area discharge analysis.

Peak discharges for the Little Rib River, Bull Junior Creek, and Johnson Creek in unincorporated Marathon County were computed using regional flood frequency equations (Reference 6) and compared to a log-Pearson Type III analysis of the Big Rib River at Rib Falls. Discharges for the 0.2- percent annual chance flood of all streams studied in detail in unincorporated Marathon County were determined by straight-line extrapolation of the calculated frequency curves on log-probability paper. The decrease in discharge going downstream Bull Junior Creek in the unincorporated areas of Marathon County is the result of water overtopping the roads near the intersection of U.S. Highway 51 and Kowalski Road. This water leaves the stream, following other paths to the Wisconsin River.

In the Village of Athens, values for the 10-, 2-, and 1-percent flood discharges at the eastern corporate limit and Degner Street for Black Creek were calculated using regional equations developed by Conger (Reference 6). The Conger method employs the following independent variables in a multiple-regression analysis: drainage area, main channel slope, lake and marsh area, main channel length, forest cover, soil index, precipitation intensity, and areal factors. The 0.2-percent flood discharges were defined by extension of the calculated frequency curve on a log-probability plot. Discharge values for the 10- and 2-percent discharges at the confluence with Black Creek for Potato Creek were calculated using the same regional equations (Reference 6). The 1- and 0.2-percent flood discharges were defined by extension of the calculated frequency curve on a log probability plot. The calculated discharges for Black Creek and Potato Creek correlated well with analyses of gage station data on other streams nearby.

In the Village of Athens, gage stations near the Black Creek include the New Wood River gage near Merrill with a record from 1952 to 1975; the Prairie River gage near Merrill with a record from 1921 to 1975; the Big Sandy Creek gage near Wausau with a record from 1963 to 1975; and the Big Eau Pleine gage near Colby with a record from 1962 to 1975. Gage stations near Potato Creek include the Bull Junior Creek gage near Rothschild with a record from 1967 to 1975; and the Pet Brook gage near Edgar with a record from 1961 to 1975. The gage data were made in accordance with the U.S. Water Resources Council Bulletin No. 17 (Reference 7).

In the Village of Marathon City, data from the USGS stream flow gaging station (no. 05-3960.00) located on the Big Rib River at Rib Falls were used in a log-Pearson Type III statistical analysis (Reference 7). The statistical analysis of the observed annual peak discharge values provided estimates of the 10-, 2-, 1-, and 0.2-percent peak flood discharges. These were transferred to the downstream corporate limit and to State Highway 107 in Marathon City by a drainage-area ratio method. The discharge values were coordinated with the Marathon County FIS (Reference 8).

For the City of Wausau, flood-frequency discharges for the Wisconsin River at Rothschild and at Merrill were based on a study of all the stream flow gaging stations on the Wisconsin River by the USACE and the USGS. The flood-frequency


discharges for the Wisconsin River at Merrill were multiplied by the drainage area ratio between Wausau and Merrill to determine the corresponding discharges in Wausau upstream from the River. Merrill is about thirteen river miles upstream of Wausau.

In the City of Wausau, flood-frequency data available for the Wisconsin River at Rothschild, the Rib River at Rib Falls, and the Eau Claire River at Kelly were used to determine the flood-frequency discharges in Wausau for the Wisconsin River just downstream from the Rib River. A comparison of the peak discharges at these gaging stations with peak discharges of record in Wisconsin and other states is presented in Figure 1. The peak discharges recorded in Wisconsin are lower than those shown for other states for similar size drainage areas. The Wisconsin flood peaks plotted have recurrence intervals ranging from about 25 years to somewhat greater than 100 years. All flood peaks shown for other states, however, are for outstanding floods. Therefore, it is logical that most of the Wisconsin data points plot lower than the out-of-state data. In central Wisconsin, much greater peak discharges have occurred on the Rib River at Rib Falls than on the Eau Claire River at Kelly, although the drainage areas are nearly the same. This is primarily due to marked differences in basin characteristics. The Rib River drains an area underlain by impermeable crystalline rock overlain by thin glacial drift. The Eau Claire River, on the other hand, drains an area underlain by thick, extensive, and permeable glacial outwash (Reference 9).

In the City of Wausau, flood-frequency curves for the Eau Claire River at Kelly were developed from data in a report by Conger (Reference 6). Flood-frequency data for the Eau Claire River at the dam in Schofield were taken from Gannon (Reference 10).

A flood-frequency curve was computed in the City of Wausau for the Jim Moore Creek at the mouth of the Wisconsin River using a regional analysis (Reference 6). Flood discharges may be lower downstream from the golf course culvert than upstream because storage capacity in the backwater areas temporarily holds some of the floodwaters. Storage analyses were not made, however, in the computation of the flood-frequency discharges used in this study for Jim Moore Creek.

The City of Wausau Dam complex was analyzed using various methods in an attempt to develop a stage-discharge relationship that would fit available historic data near Barker's Island. These data were flood stages with peak discharges of about 23,000 cfs (May 1973) and 50,000 cfs (September 1941). The final method used was based on work compiled by Matthai (Reference 11). The basic equation in Matthai's report includes a discharge coefficient that was adjusted for this study to get the computed data to fit the historical data. A slope conveyance rating at Barker's Island also fits these historical data, but was concave down when plotted graphically, whereas the previous rating was concave up. The relationship based on Matthai was considered to be the better of the two.

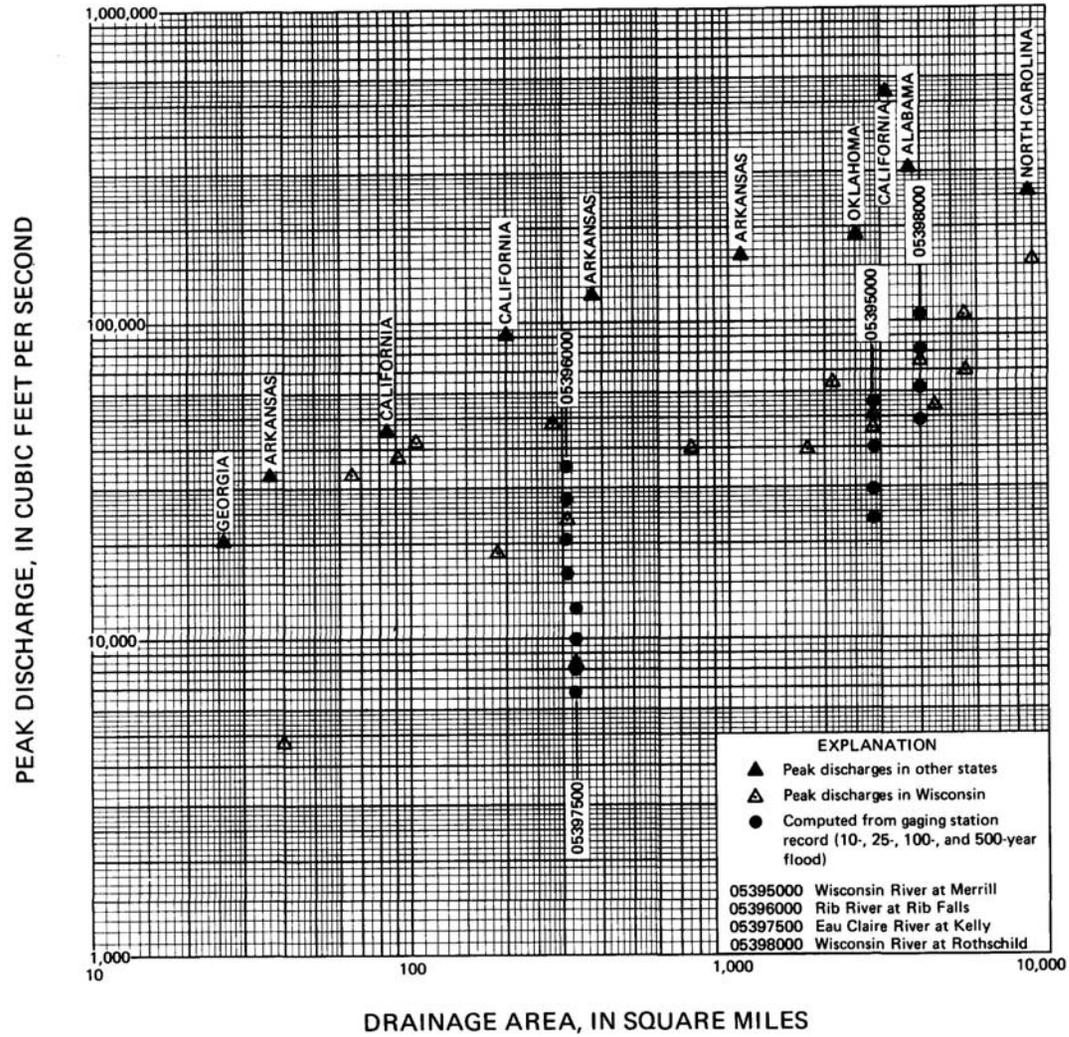

F I G U R E
1

FEDERAL EMERGENCY MANAGEMENT AGENCY
**MARATHON COUNTY, WI
 (AND INCORPORATED AREAS)**

FREQUENCY – DISCHARGE, DRAINAGE AREA CURVES

WISCONSIN RIVER, RIB RIVER, AND EAU CLAIRE RIVER

This Countywide Analysis:

Flow rates for the Wisconsin River from the Dam at Mosinee to the Dam at Rothschild were updated to match data included in a 1980 USGS study (Reference 12). The 10-, 2-, and 0.2-percent flows match the unregulated annual maximum flows for gaging station 05398000 at Rothschild. The 1-percent flow represents the regulated annual maximum flow at the Rothschild gage.

A summary of the drainage area-peak discharge relationships for all of the streams studied by detailed methods is shown in Table 5, "Summary of Discharges".

TABLE 5 – SUMMARY OF DISCHARGES

| <u>FLOODING SOURCE AND LOCATION</u> | <u>DRAINAGE AREA (sq. miles)</u> | <u>PEAK DISCHARGES (cfs)</u> | | | |
|---|--|---|--|--|--|
| | | <u>10-PERCENT ANNUAL CHANCE</u> | <u>2-PERCENT ANNUAL CHANCE</u> | <u>1-PERCENT ANNUAL CHANCE</u> | <u>0.2-PERCENT ANNUAL CHANCE</u> |
| BIG RIB RIVER | | | | | |
| At confluence with Wisconsin River | 489 | 22,400 | 35,600 | 41,600 | 54,600 |
| Just upstream from Little Rib River | 404 | 19,750 | 31,450 | 36,750 | 48,200 |
| At Chicago and North Western railroad bridge | 386 | 19,200 | 30,550 | 35,700 | 46,800 |
| Just upstream from Artus Creek | 372 | 18,750 | 29,800 | 34,850 | 45,700 |
| At State Highway 107 at Marathon City | 365 | 18,500 | 29,450 | 34,400 | 45,150 |
| BLACK CREEK | | | | | |
| At east corporate limit of Athens | 52.5 | 3,020 | 5,000 | 5,950 | 8,450 |
| At Degner Street in Athens | 40.5 | 2,400 | 4,050 | 4,820 | 7,000 |
| BULL JUNIOR CREEK | | | | | |
| At confluence with Wisconsin River | 37 | 940 | 1,590 | 1,940 | 2,790 |
| At Adar Road | 30 | 790 | 1,370 | 1,640 | 2,390 |
| At County Highway X | 27 | 950 | 1,530 | 1,800 | 2,550 |
| At Town Road | 15 | 930 | 1,500 | 1,750 | 2,450 |
| EAU CLAIRE RIVER | | | | | |
| At Chicago, Milwaukee, St. Paul, & Pacific Railroad bridge at Schofield corporate limit | 454 | 8,100 | 11,000 | 12,000 | 15,000 |
| Just west of County Highway SS, at USGS Gaging Station at Kelly | 375 | 6,500 | 8,960 | 9,900 | 12,000 |

TABLE 5 – SUMMARY OF DISCHARGES
(continued)

| FLOODING SOURCE AND LOCATION | DRAINAGE AREA (sq. miles) | PEAK DISCHARGES (cfs) | | | |
|---|---------------------------------|--|--|--|---|
| | | <u>10-PERCENT ANNUAL CHANCE</u> | <u>2-PERCENT ANNUAL CHANCE</u> | <u>1-PERCENT ANNUAL CHANCE</u> | <u>0.2-PERCENT ANNUAL CHANCE</u> |
| JOHNSON CREEK | | | | | |
| At County Highway C | 29 | 1,500 | 2,400 | 2,850 | 3,950 |
| At County Highway X | 25 | 1,400 | 2,200 | 2,600 | 3,600 |
| 2,900 feet east and 300 feet north of the intersection of Locker Road and County Highway X | 21 | 1,200 | 1,900 | 2,250 | 3,100 |
| 3,250 feet east and 5,050 feet north of the intersection of Locker Road and County Highway X | 17 | 1,000 | 1,600 | 1,900 | 2,600 |
| At State Highway 153 | 12 | 730 | 1,150 | 1,350 | 1,850 |
| LITTLE RIB RIVER | | | | | |
| At confluence with Big Rib River | 80.1 | 6,600 | 12,050 | 15,150 | 24,000 |
| POTATO CREEK | | | | | |
| At confluence with Black Creek | 11.8 | 1,100 | 1,850 | 2,200 | 3,100 |
| WISCONSIN RIVER | | | | | |
| At Rothschild | 4,000 | 49,000 | 63,000 | 64,000 | 80,000 |
| Just upstream of Eau Claire River | 3,590 | 42,000 | 61,800 | 71,100 | 94,100 |
| At Washington Street in Wausau | | 18,125 ^{1/} 8,325 ² | 29,000 ^{1/} 9,110 ² | 34,680 ^{1/} 9,920 ² | 47,224 ^{1/} 13,900 ² |
| Just upstream of Big Rib River | 3,100 | 25,600 | 37,900 | 44,600 | 61,300 |
| ¹ West Channel ² East Channel | | | | | |

3.2 Hydraulic Analyses

Analyses of the hydraulic characteristics of flooding from the sources studied were carried out to provide estimates of the elevations of floods of the selected recurrence intervals. Users should be aware that flood elevations shown on the FIRM represent rounded whole-foot elevations and may not exactly reflect the elevations shown on the Flood Profiles or in the Floodway Data tables in the FIS report. Flood elevations shown on the FIRM are primarily intended for flood insurance rating purposes. For construction and/or floodplain management purposes, users are cautioned to use the flood elevation data presented in this FIS in conjunction with the data shown on the FIRM.

The City of Athens, the villages of Athens and Marathon City, and the unincorporated areas of Marathon County have a previously printed FIS report. The hydraulic analyses described in those reports have been compiled and summarized below.

Pre-Countywide Analysis:

Within the unincorporated areas of Marathon County, the Big Rib River and the Wisconsin River were found to have similar discharges at their confluence and have historically flooded simultaneously. Starting water surface elevations for the Big Rib River were taken from established flood profiles on the Wisconsin River (Reference 4). The step-backwater analysis for the 10-, 2-, 1-, and 0.2-percent flood profiles on the Little Rib River were started from the 10-percent flood elevation on the Big Rib River.

On the Eau Claire River within unincorporated Marathon County, starting water-surface elevations (WSEL) were computed by standard procedures for computation of flow over dams (Reference 13). Starting WSELs for the Wisconsin River were computed by a rating curve at a downstream cross section. Starting WSEL for Bull Junior Creek and Johnson Creek were obtained by using a slope-area method. Water surface elevations of floods of the selected recurrence intervals were computed through use of the USGS E431 step-backwater computer program (Reference 14).

Within unincorporated Marathon County, the hydraulic analyses for the Wisconsin River near the City of Mosinee were taken from the Mosinee, Wisconsin Flood Insurance Study (Reference 3). However, no profiles were presented in the Mosinee FIS and therefore none can be presented in this study for the Wisconsin River near Mosinee.

Bull Junior Creek in unincorporated Marathon County was found to cause shallow flooding around the intersection of U.S. Highway 51 and Kowalski Road. After Bull Junior Creek floodwaters rise high enough to overtop the roads, the water that remains trapped behind the roads may flow either north or south depending on the flooding situation in the area. Depths from one to three feet can be expected.

In unincorporated Marathon County, sections of the Big Eau Pleine River, Eau Claire River, Rib River, Elm River, Big Sandy Creek, Norrie Creek, Dill Creek, South Branch Embarrass River, Comet Creek, Spanges Creek, Little Eau Pleine River, Plover River, upper and lower reaches of the Wisconsin River, lower reaches of Johnson Creek, Trappe River, Little Trappe River, Cain Creek, Little Cain Creek, Camp Creek, Prospect Creek, the 100-year flood elevation was approximated by using Flood-Prone Area Maps (Reference 15). For Black Creek, Beaver Creek, West Fork Rib River, Potato Creek, and Drewek Creek, the 1-percent flood elevation was approximated by aerial photographs (Reference 16).

Cross section data for Black Creek and Potato Creek in the Village of Athens were obtained from field surveys by the USGS. The source of starting water-surface elevations for the Black Creek was obtained by a slope-conveyance rating downstream from the Athens corporate limits. Starting water-surface elevations for the Potato Creek were obtained by a critical depth elevation at initial cross sections. Profiles of the 10-, 2-, 1-, and 0.2-percent floods on Black Creek and Potato Creek

were computed by the standard step-backwater method using the USGS E431 computer program (Reference 14). Input to these analyses consisted of stream valley cross sections, bridge and culvert geometry, surface roughness, and peak-discharge data. The analysis for the elevation of the portion of Potato Creek studied by approximate methods included interpretation of aerial photographs (Reference 17), field observations, and best engineering judgment.

The starting water-surface elevations for the Big Rib River in the Village of Marathon City were obtained from the Marathon County FIS (Reference 8). Profiles for the 10-, 2-, 1-, and 0.2-percent floods on the Big Rib River at Marathon City were also computed by the standard step-backwater method using the USGS E431 model (Reference 14). Input to the above analyses consisted of stream valley cross sections, bridge geometry, surface roughness, and peak discharge data.

Flood-frequency profiles in the City of Wausau on the Wisconsin River below the Wausau Dam were computed using step-backwater analysis. The starting elevations were taken from Krug and Grant (Reference 18). The computed profiles compare favorably and historic data for the 1941 flood. Above the Wausau Dam complex, at the Memorial Bridge, the starting elevations of flood profiles were determined on work based on Matthai (Reference 11). The Eau Claire River flood profiles in the City were taken from a previous study by Krug and Grant (Reference 18).

The starting elevations for the flood-frequency profiles for Jim Moore Creek in the City of Wausau were based on a slope-conveyance rating at the downstream side of Tenth Street. The slope used was that computed from the stage and discharge for a flood in September of 1972. Data on flood frequency discharges for the Tenth Street Bridge were obtained from the flood-frequency curves included in a Flood Report by the USGS. The 1-percent discharge at this bridge, having a drainage area of approximately 7.32 square miles, was determined to be 3,720 cfs from the above flood-frequency curve.

This Countywide Analysis:

The Wisconsin River from the Dam at Mosinee to the Dam at Rothschild was updated using a 1991 HEC-2 model completed by the USGS. Model includes updated flow rates as discussed in the Hydrologic section. The HEC-2 model was not only an update from the effective E431 model for this portion of the Wisconsin River, but also included additional surveyed cross sections at key points developed by the USACE.

The effective 1979 USGS Step Backwater Program results were used to extend the Eau Claire River profile to its mouth within the Eau Claire Flowage.

Roughness factors (Manning's "n" values) used in the hydraulic computations were chosen by engineering judgment and were based on field observations of the streams

and floodplain areas. Roughness factors for all streams studied by detailed methods are shown in Table 6, "Manning's "n" Values."

TABLE 6 – MANNING'S "n" VALUES

| <u>Stream</u> | <u>Channel "n"</u> | <u>Overbank "n"</u> |
|-------------------|--------------------|---------------------|
| Black Creek | 0.035 – 0.065 | 0.055 – 0.110 |
| Bull Junior Creek | 0.040 – 0.045 | 0.050 – 0.120 |
| Eau Claire River | 0.035 – 0.050 | 0.050 – 0.150 |
| Johnson Creek | 0.040 – 0.055 | 0.060 – 0.150 |
| Little Rib River | 0.032 – 0.055 | 0.045 – 0.150 |
| Potato Creek | 0.035 | 0.065 – 0.110 |
| Wisconsin River | 0.026 – 0.050 | 0.050 – 0.110 |

Locations of selected cross sections used in the hydraulic analyses are shown on the Flood Profiles (Exhibit 1). For stream segments for which a floodway was computed (Section 4.2), selected cross-section locations are also shown on the FIRM (Exhibit 2).

The hydraulic analyses for this study were based on unobstructed flow. The flood elevations shown on the Flood Profiles (Exhibit 1) are thus considered valid only if hydraulic structures remain unobstructed, operate properly, and do not fail.

3.3 Vertical Datum

All FIS reports and FIRMs are referenced to a specific vertical datum. The vertical datum provides a starting point against which flood, ground, and structure elevations can be referenced and compared. Until recently, the standard vertical datum used for newly created or revised FIS reports and FIRMs was the National Geodetic Vertical Datum of 1929 (NGVD29). With the completion of the North American Vertical Datum of 1988 (NAVD88), many FIS reports and FIRMs are now prepared using NAVD88 as the referenced vertical datum.

Flood elevations shown in this FIS report and on the FIRM are referenced to the NAVD. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. Some of the data used in this revision were taken from the prior effective FIS reports and FIRMs and adjusted to NAVD88. The datum conversion factor from NGVD29 to NAVD88 in Marathon County is 0.0 feet.

For additional information regarding conversion between the NGVD29 and NAVD88, visit the National Geodetic Survey website at www.ngs.noaa.gov, or contact the National Geodetic Survey at the following address:

Vertical Network Branch, N/CG13
National Geodetic Survey, NOAA
Silver Spring Metro Center 3
1315 East-West Highway
Silver Spring, Maryland 20910
(301) 713-3191

Temporary vertical monuments are often established during the preparation of a flood hazard analysis for the purpose of establishing local vertical control. Although these monuments are not shown on the FIRM, they may be found in the Technical Support Data Notebook associated with the FIS report and FIRM for this community.

Interested individuals may contact FEMA to access these data.

To obtain current elevation, description, and/or location information for benchmarks shown on this map, please contact the Information Services Branch of the NGS at (301) 713-3242, or visit their website at www.ngs.noaa.gov.

4.0 **FLOODPLAIN MANAGEMENT APPLICATIONS**

The NFIP encourages State and local governments to adopt sound floodplain management programs. To assist in this endeavor, each FIS provides 1-percent annual chance floodplain data, which may include a combination of the following: 10-, 2-, 1-, and 0.2-percent annual chance flood elevations; delineations of the 1-percent annual chance and 0.2-percent annual chance floodplains; and 1-percent annual chance floodway. This information is presented on the FIRM and in many components of the FIS, including Flood Profiles, Floodway Data tables, and Summary of Stillwater Elevation tables. Users should reference the data presented in the FIS as well as additional information that may be available at the local community map repository before making flood elevation and/or floodplain boundary determinations.

4.1 Floodplain Boundaries

To provide a national standard without regional discrimination, the 1-percent annual chance (1-percent annual chance) flood has been adopted by FEMA as the base flood for floodplain management purposes. The 0.2-percent-annual-chance flood is employed to indicate additional areas of flood risk in the community. For each stream studied by detailed methods, the 1- and 0.2-percent-annual-chance floodplain boundaries have been delineated using the flood elevations determined at each cross section.

Between cross sections within the unincorporated areas of Marathon County, the boundaries were interpolated using 7.5-minute series topographic maps at a scale of 1:24000, with a contour interval of 10 feet (Reference 19), and 15-Minute Series topographic maps at a scale of 1:62500 with a contour interval of 10 feet (Reference 20).

Between the cross sections within the Village of Athens, boundaries were interpolated using USGS quadrangle maps and aerial photos modified by familiarity with the topography of the valleys (References 17 and 21). The boundary of the floodway was delineated using the left and right flowage limits of the cross sections which, in almost all cases, coincided with the 1-percent annual chance natural valley flood limits. The approximate flood boundaries were delineated using the same topographic maps (Reference 21).

Between the cross sections within the Village of Marathon City, the boundaries were interpolated using topographic maps enlarged to a scale of 1:4800 (Reference 22), aerial photographs (Reference 23), and field inspection.

For this countywide study, the 1- and 0.2-percent annual chance floodplain boundaries in the City of Wausau and the Town of Rib Mountain were re-delineated using a digital terrain model that meets the National Map Accuracy Standards for mapping at a scale of 1:1200. Floodplain boundaries were also redelineated in the Village of Weston using 2-foot contours that meet National Map Accuracy Standards for mapping at a scale of 1:2400. Floodplain boundaries in the remainder of the county were digitally converted from the previously effective FIRM.

The 1- and 0.2-percent annual chance floodplain boundaries are shown on the FIRM (Exhibit 2). On this map, the 1-percent annual chance floodplain boundary corresponds to the boundary of the areas of special flood hazards (Zones A and AE), and the 0.2-percent annual chance floodplain boundary corresponds to the boundary of areas of moderate flood hazards. In cases where the 1- and 0.2-percent annual chance floodplain boundaries are close together, only the 1-percent annual chance floodplain boundary has been shown. Small areas within the floodplain boundaries may lie above the flood elevations but cannot be shown due to limitations of the map scale and/or lack of detailed topographic data.

For the streams studied by approximate methods, only the 1-percent-annual-chance floodplain boundary is shown on the FIRM (Exhibit 2).

4.2 Floodways

Encroachment on floodplains, such as structures and fill, reduces flood-carrying capacity, increases flood heights and velocities, and increases flood hazards in areas beyond the encroachment itself. One aspect of floodplain management involves balancing the economic gain from floodplain development against the resulting increase in flood hazard. For purposes of the NFIP, a floodway is used as a tool to assist local communities in this aspect of floodplain management. Under this concept, the area of the 1-percent-annual-chance floodplain is divided into a floodway and a floodway fringe. The floodway is the channel of a stream, plus any adjacent floodplain areas, that must be kept free of encroachment so that the base flood can be carried without substantial increases in flood heights. Minimum Federal

standards limit such increases to 1.0 foot, provided that hazardous velocities are not produced. However, Wisconsin has established a more strict policy and does not allow any increase in the regional flood height for flood fringe developments (Reference 24). The increase shown in Table 7, "Floodway Data" for certain stream segments were calculated before this policy went into effect, and are shown as the regulatory elevation to remain in compliance with the current regulation. The floodways in this FIS are presented to local agencies as minimum standards that can be adopted directly or that can be used as a basis for additional floodway studies.

The floodways presented in this study were computed for certain stream segments on the basis of equal conveyance reduction from each side of the floodplain. Floodway widths were computed at cross sections. Between cross sections, the floodway boundaries were interpolated. The results of the floodway computations are tabulated for selected cross sections (see Table 7, "Floodway Data"). The computed floodways are shown on the FIRM (Exhibit 2). In cases where the floodway and 1-percent-annual-chance floodplain boundaries are either close together or collinear, only the floodway boundary is shown.

For this countywide study, floodways computed in the 1973 USGS study (Reference 4) for the Wisconsin River, Eau Claire River, and Jim Moore Creek were added.

For this countywide study's redelineation efforts, the floodways were not recalculated. As a result, there were areas where the previous floodway did not fit within the boundaries of the redelineated 1-percent annual chance floodplain. In these areas, the floodway was reduced. Water surface elevations, with and without a floodway, the mean velocity in the floodway, and the location and area at each surveyed cross section as determined by the hydraulic methods can be seen in Table 7.

The area between the floodway and 1-percent-annual-chance floodplain boundaries is termed the floodway fringe. The floodway fringe encompasses the portion of the floodplain that could be completely obstructed without increasing the WSEL of the base flood more than 1 foot at any point. Typical relationships between the floodway and the floodway fringe and their significance to floodplain development are shown in Figure 2, "Floodway Schematic."

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|-----------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| BIG RIB RIVER | | | | | | | | |
| A | 2,746 | 1,932 | 20,560 | 2.0 | 1,167.5 | 1,167.5 | 1,167.5 | 0.0 |
| B | 3,854 | 3,042 | 29,560 | 1.4 | 1,167.6 | 1,167.6 | 1,167.6 | 0.0 |
| C | 7,075 | 3,268 | 21,960 | 1.9 | 1,168.1 | 1,168.1 | 1,168.1 | 0.0 |
| D | 7,920 | 2,533 | 14,540 | 2.9 | 1,168.6 | 1,168.6 | 1,168.6 | 0.0 |
| E | 10,138 | 1,955 | 13,880 | 3.0 | 1,169.9 | 1,169.9 | 1,169.9 | 0.0 |
| F | 12,038 | 2,415 | 18,035 | 2.3 | 1,171.0 | 1,171.0 | 1,171.0 | 0.0 |
| G | 15,048 | 3,435 | 19,860 | 1.9 | 1,172.4 | 1,172.4 | 1,172.4 | 0.0 |
| H | 20,909 | 2,144 | 19,150 | 1.9 | 1,174.2 | 1,174.2 | 1,174.2 | 0.0 |
| I | 22,651 | 2,088 | 16,820 | 2.2 | 1,175.2 | 1,175.2 | 1,175.2 | 0.0 |
| J | 24,130 | 3,177 | 23,630 | 1.6 | 1,176.5 | 1,176.5 | 1,176.5 | 0.0 |
| K | 24,922 | 3,141 | 21,510 | 1.7 | 1,176.8 | 1,176.8 | 1,176.8 | 0.0 |
| L | 27,350 | 3,450 | 24,480 | 1.5 | 1,177.9 | 1,177.9 | 1,177.9 | 0.0 |
| M | 29,040 | 3,890 | 21,040 | 1.8 | 1,178.8 | 1,178.8 | 1,178.8 | 0.0 |
| N | 30,835 | 3,757 | 29,260 | 1.3 | 1,179.5 | 1,179.5 | 1,179.5 | 0.0 |
| O | 33,528 | 3,323 | 25,190 | 1.5 | 1,180.3 | 1,180.3 | 1,180.3 | 0.0 |
| P | 34,637 | 3,700 | 22,420 | 1.6 | 1,181.0 | 1,181.0 | 1,181.0 | 0.0 |
| Q | 36,960 | 1,979 | 14,110 | 2.6 | 1,182.3 | 1,182.3 | 1,182.3 | 0.0 |
| R | 37,910 | 2,998 | 16,170 | 2.3 | 1,182.7 | 1,182.7 | 1,182.7 | 0.0 |
| S | 39,811 | 2,722 | 21,930 | 1.7 | 1,184.7 | 1,184.7 | 1,184.7 | 0.0 |
| T | 41,078 | 2,772 | 22,910 | 1.6 | 1,185.3 | 1,185.3 | 1,185.3 | 0.0 |
| U | 42,346 | 2,820 | 21,400 | 1.7 | 1,185.9 | 1,185.9 | 1,185.9 | 0.0 |
| V | 43,243 | 2,012 | 16,360 | 2.3 | 1,186.4 | 1,186.4 | 1,186.4 | 0.0 |
| W | 44,141 | 1,450 | 12,340 | 2.9 | 1,187.2 | 1,187.2 | 1,187.2 | 0.0 |
| X | 44,669 | 604 | 6,280 | 5.7 | 1,187.5 | 1,187.5 | 1,187.5 | 0.0 |
| Y | 45,619 | 863 | 8,990 | 4.0 | 1,188.5 | 1,188.5 | 1,188.5 | 0.0 |

¹FEET ABOVE CONFLUENCE WITH WISCONSIN RIVER

TABLE 7

**FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS**

FLOODWAY DATA

BIG RIB RIVER

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|------------------------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| BIG RIB RIVER (CONTINUED) | | | | | | | | |
| Z | 46,253 | 916 | 8,240 | 4.3 | 1,189.5 | 1,189.5 | 1,189.5 | 0.0 |
| AA | 47,045 | 1,231 | 10,750 | 3.3 | 1,190.6 | 1,190.6 | 1,190.6 | 0.0 |
| AB | 47,942 | 1,289 | 11,570 | 3.1 | 1,191.0 | 1,191.0 | 1,191.0 | 0.0 |
| AC | 48,998 | 1,650 | 15,760 | 2.3 | 1,191.7 | 1,191.7 | 1,191.7 | 0.0 |
| AD | 49,843 | 2,427 | 20,620 | 1.7 | 1,192.2 | 1,192.2 | 1,192.2 | 0.0 |
| AE | 50,688 | 2,415 | 17,890 | 2.0 | 1,192.7 | 1,192.7 | 1,192.7 | 0.0 |
| AF | 51,586 | 2,006 | 21,230 | 1.7 | 1,193.3 | 1,193.3 | 1,193.3 | 0.0 |
| AG | 52,483 | 2,501 | 21,580 | 1.7 | 1,193.7 | 1,193.7 | 1,193.7 | 0.0 |
| AH | 53,222 | 2,629 | 28,050 | 1.3 | 1,194.2 | 1,194.2 | 1,194.2 | 0.0 |
| AI | 54,490 | 1,517 | 13,280 | 2.7 | 1,194.4 | 1,194.4 | 1,194.4 | 0.0 |
| AJ | 55,282 | 1,668 | 21,410 | 1.7 | 1,194.9 | 1,194.9 | 1,194.9 | 0.0 |
| AK | 55,915 | 1,916 | 20,560 | 1.7 | 1,195.0 | 1,195.0 | 1,195.0 | 0.0 |
| AL | 56,813 | 2,111 | 13,660 | 2.6 | 1,195.3 | 1,195.3 | 1,195.3 | 0.0 |
| AM | 57,710 | 2,550 | 27,570 | 1.3 | 1,196.1 | 1,196.1 | 1,196.1 | 0.0 |
| AN | 59,875 | 3,054 | 28,250 | 1.2 | 1,196.2 | 1,196.2 | 1,196.2 | 0.0 |
| AO | 60,720 | 2,647 | 13,930 | 2.5 | 1,196.2 | 1,196.2 | 1,196.2 | 0.0 |
| AP | 61,459 | 1,821 | 8,200 | 4.3 | 1,196.5 | 1,196.5 | 1,196.5 | 0.0 |
| AQ | 62,357 | 1,515 | 10,410 | 3.4 | 1,197.1 | 1,197.1 | 1,197.1 | 0.0 |
| AR | 64,310 | 2,499 | 12,720 | 2.7 | 1,198.7 | 1,198.7 | 1,198.7 | 0.0 |
| AS | 64,786 | 2,224 | 13,710 | 2.5 | 1,199.9 | 1,199.9 | 1,199.9 | 0.0 |
| AT | 66,211 | 1,643 | 10,390 | 3.4 | 1,201.1 | 1,201.1 | 1,201.1 | 0.0 |
| AU | 67,267 | 1,699 | 11,000 | 3.2 | 1,202.3 | 1,202.3 | 1,202.3 | 0.0 |
| AV | 68,218 | 1,900 | 11,770 | 3.0 | 1,202.8 | 1,202.8 | 1,202.8 | 0.0 |
| AW | 72,547 | 2,080 | 20,700 | 1.7 | 1,203.8 | 1,203.8 | 1,203.8 | 0.0 |

¹FEET ABOVE CONFLUENCE WITH WISCONSIN RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

FLOODWAY DATA

BIG RIB RIVER

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|--------------------------------------|---------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| BIG RIB RIVER (CONTINUED) | | | | | | | | |
| AX | 73,709 ¹ | 1,870 | 14,500 | 2.4 | 1,204.0 | 1,204.0 | 1,204.0 | 0.0 |
| AY | 74,501 ¹ | 960 | 10,600 | 3.2 | 1,204.3 | 1,204.3 | 1,204.3 | 0.0 |
| AZ | 75,134 ¹ | 860 | 9,500 | 3.6 | 1,204.5 | 1,204.5 | 1,204.5 | 0.0 |
| BA | 76,085 ¹ | 1,570 | 11,300 | 3.1 | 1,205.0 | 1,205.0 | 1,205.0 | 0.0 |
| BB | 78,302 ¹ | 1,610 | 14,600 | 2.4 | 1,205.7 | 1,205.7 | 1,205.7 | 0.0 |
| BC | 80,995 ¹ | 1,443 | 12,710 | 2.7 | 1,206.7 | 1,206.7 | 1,206.7 | 0.0 |
| BD | 82,685 ¹ | 797 | 7,260 | 4.7 | 1,208.2 | 1,208.2 | 1,208.2 | 0.0 |
| BLACK CREEK | | | | | | | | |
| A | 40,392 ² | 275 | 916 | 6.5 | 1,313.2 | 1,313.2 | 1,313.2 | 0.0 |
| B | 40,814 ² | 340 | 1,280 | 4.7 | 1,315.4 | 1,315.4 | 1,315.4 | 0.0 |
| C | 41,184 ² | 190 | 945 | 6.3 | 1,316.2 | 1,316.2 | 1,316.2 | 0.0 |
| D | 41,976 ² | 220 | 981 | 4.9 | 1,318.5 | 1,318.5 | 1,318.5 | 0.0 |
| E | 42,451 ² | 260 | 1,020 | 4.7 | 1,320.7 | 1,320.7 | 1,320.7 | 0.0 |
| F | 42,874 ² | 390 | 888 | 5.4 | 1,322.4 | 1,322.4 | 1,322.4 | 0.0 |
| G | 43,296 ² | 140 | 802 | 6.0 | 1,324.2 | 1,324.2 | 1,324.2 | 0.0 |
| H | 43,507 ² | 200 | 1,260 | 3.9 | 1,327.3 | 1,327.3 | 1,327.3 | 0.0 |
| I | 43,824 ² | 370 | 1,710 | 2.8 | 1,327.8 | 1,327.8 | 1,327.8 | 0.0 |
| J | 44,246 ² | 130 | 731 | 6.6 | 1,328.0 | 1,328.0 | 1,328.0 | 0.0 |
| K | 44,669 ² | 130 | 812 | 5.9 | 1,330.1 | 1,330.1 | 1,330.1 | 0.0 |
| L | 45,038 ² | 160 | 961 | 5.0 | 1,331.6 | 1,331.6 | 1,331.6 | 0.0 |
| M | 45,355 ² | 90 | 428 | 11.3 | 1,335.2 | 1,335.2 | 1,335.2 | 0.0 |
| N | 45,619 ² | 170 | 1,120 | 4.3 | 1,339.9 | 1,339.9 | 1,339.9 | 0.0 |
| O | 45,936 ² | 100 | 472 | 10.2 | 1,341.6 | 1,341.6 | 1,341.6 | 0.0 |

¹FEET ABOVE CONFLUENCE WITH WISCONSIN RIVER, ²FEET ABOVE CONFLUENCE WITH BIG RIB RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

FLOODWAY DATA

BIG RIB RIVER - BLACK CREEK

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|----------------------------|---------------------|-----------------|-------------------------------------|--|---|----------------------|------------------|----------|
| CROSS SECTION | DISTANCE | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| BLACK CREEK (CONTINUED) | | | | | | | | |
| P | 46,200 ¹ | 110 | 509 | 9.5 | 1,348.2 | 1,348.2 | 1,348.2 | 0.0 |
| Q | 46,886 ¹ | 130 | 619 | 7.8 | 1,353.7 | 1,353.7 | 1,353.7 | 0.0 |
| R | 47,678 ¹ | 170 | 1,050 | 4.6 | 1,358.2 | 1,358.2 | 1,358.2 | 0.0 |
| S | 47,890 ¹ | 240 | 1,460 | 3.3 | 1,361.4 | 1,361.4 | 1,361.4 | 0.0 |
| T | 49,421 ¹ | 450 | 2,360 | 2.1 | 1,362.8 | 1,362.8 | 1,362.8 | 0.0 |
| BULL JUNIOR CREEK | | | | | | | | |
| A | 637 ² | 149 | 315 | 6.2 | 1,146.7 | 1,141.3 ³ | 1,141.3 | 0.0 |
| B | 845 ² | 350 | 955 | 2.0 | 1,146.7 | 1,142.9 ³ | 1,142.9 | 0.0 |
| C | 1,056 ² | 300 | 875 | 2.2 | 1,146.7 | 1,143.1 ³ | 1,143.1 | 0.0 |
| D | 1,848 ² | 208 | 715 | 2.7 | 1,146.7 | 1,144.1 ³ | 1,144.1 | 0.0 |
| E | 2534 ² | 160 | 465 | 4.2 | 1,146.7 | 1,146.3 ³ | 1,146.3 | 0.0 |
| F | 3,168 ² | 233 | 775 | 2.5 | 1,148.0 | 1,148.0 | 1,148.0 | 0.0 |
| G | 3,590 ² | 121 | 285 | 6.8 | 1,148.7 | 1,148.7 | 1,148.7 | 0.0 |
| H | 4,013 ² | 134 | 565 | 3.4 | 1,151.4 | 1,151.4 | 1,151.4 | 0.0 |
| I | 4,118 ² | 81 | 560 | 3.5 | 1,152.8 | 1,152.8 | 1,152.8 | 0.0 |
| J | 4,171 ² | 94 | 380 | 5.1 | 1,152.8 | 1,152.8 | 1,152.8 | 0.0 |
| K | 5,016 ² | 434 | 1,905 | 1.0 | 1,153.6 | 1,153.6 | 1,153.6 | 0.0 |
| L | 5,914 ² | 278 | 1,190 | 1.6 | 1,153.8 | 1,153.8 | 1,153.8 | 0.0 |
| M | 6,706 ² | 233 | 850 | 2.3 | 1,154.2 | 1,154.2 | 1,154.2 | 0.0 |
| N | 6,917 ² | 114 | 495 | 3.9 | 1,154.3 | 1,154.3 | 1,154.3 | 0.0 |
| O | 7,709 ² | 171 | 620 | 3.1 | 1,155.4 | 1,155.4 | 1,155.4 | 0.0 |
| P | 8,448 ² | 183 | 685 | 2.8 | 1,156.2 | 1,156.2 | 1,156.2 | 0.0 |
| Q | 9,293 ² | 344 | 1,275 | 1.5 | 1,157.2 | 1,157.2 | 1,157.2 | 0.0 |

¹FEET ABOVE CONFLUENCE WITH BIG RIB RIVER, ²FEET ABOVE MOUTH AT WISCONSIN RIVER, ³ELEVATION COMPUTED WITHOUT CONSIDERATION OF BACKWATER EFFECTS FROM WISCONSIN RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

FLOODWAY DATA

BLACK CREEK - BULL JUNIOR CREEK

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|----------------------------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| BULL JUNIOR CREEK (CONTINUED) | | | | | | | | |
| R | 10,402 | 919 | 2,305 | 0.8 | 1,157.8 | 1,157.8 | 1,157.8 | 0.0 |
| S | 12,619 | 784 | 2,190 | 0.9 | 1,158.7 | 1,158.7 | 1,158.7 | 0.0 |
| T | 14,256 | 429 | 725 | 2.7 | 1,160.8 | 1,160.8 | 1,160.8 | 0.0 |
| U | 14,362 | 530 | 1,104 | 1.8 | 1,161.2 | 1,161.2 | 1,161.2 | 0.0 |
| V | 15,734 | 427 | 88 | 2.2 | 1,162.4 | 1,162.4 | 1,162.4 | 0.0 |
| W | 16,579 | 324 | 1,000 | 2.0 | 1,163.4 | 1,163.4 | 1,163.4 | 0.0 |
| X | 18,110 | 391 | 1,115 | 1.7 | 1,164.6 | 1,164.6 | 1,164.6 | 0.0 |
| Y | 19,166 | 640 | 1,400 | 1.4 | 1,165.6 | 1,165.6 | 1,165.6 | 0.0 |
| Z | 20,381 | 474 | 1,305 | 1.5 | 1,166.6 | 1,166.6 | 1,166.6 | 0.0 |
| AA | 21,278 | 885 | 2,140 | 0.9 | 1,167.2 | 1,167.2 | 1,167.2 | 0.0 |
| AB | 22,704 | 563 | 1,185 | 1.6 | 1,168.3 | 1,168.3 | 1,168.3 | 0.0 |
| AC | 23,496 | 695 | 1,795 | 1.1 | 1,168.9 | 1,168.9 | 1,168.9 | 0.0 |
| AD | 24,552 | 728 | 1,660 | 1.2 | 1,169.4 | 1,169.4 | 1,169.4 | 0.0 |
| AE | 25,450 | 720 | 2,650 | 0.7 | 1,169.8 | 1,169.8 | 1,169.8 | 0.0 |
| AF | 27,086 | 886 | 1,365 | 1.4 | 1,170.3 | 1,170.3 | 1,170.3 | 0.0 |
| AG | 28,248 | 230 | 455 | 3.6 | 1,172.8 | 1,172.8 | 1,172.8 | 0.0 |
| AH | 28,406 | 662 | 1,845 | 0.8 | 1,173.6 | 1,173.6 | 1,173.6 | 0.0 |
| AI | 29,410 | 631 | 1,480 | 1.1 | 1,173.8 | 1,173.8 | 1,173.8 | 0.0 |
| AJ | 30,466 | 1,110 | 1,185 | 1.4 | 1,174.7 | 1,174.7 | 1,174.7 | 0.0 |
| AK | 31,574 | 1,011 | 2,240 | 0.2 | 1,175.8 | 1,175.8 | 1,175.8 | 0.0 |
| AL | 32,472 | 773 | 1,415 | 1.2 | 1,176.1 | 1,176.1 | 1,176.1 | 0.0 |
| AM | 33,000 | 579 | 1,300 | 1.4 | 1,176.7 | 1,176.7 | 1,176.7 | 0.0 |
| AN | 33,581 | 584 | 1,285 | 1.4 | 1,177.4 | 1,177.4 | 1,177.4 | 0.0 |
| AO | 34,531 | 749 | 2,000 | 0.9 | 1,178.3 | 1,178.3 | 1,178.3 | 0.0 |

¹FEET ABOVE MOUTH AT WISCONSIN RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

FLOODWAY DATA

BULL JUNIOR CREEK

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|----------------------------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| BULL JUNIOR CREEK (CONTINUED) | | | | | | | | |
| AP | 35,957 | 802 | 2,370 | 0.8 | 1,178.6 | 1,178.6 | 1,178.6 | 0.0 |
| AQ | 37,013 | 671 | 1,665 | 1.1 | 1,179.4 | 1,179.4 | 1,179.4 | 0.0 |
| AR | 38,491 | 821 | 2,230 | 0.8 | 1,180.3 | 1,180.3 | 1,180.3 | 0.0 |
| AS | 39,811 | 728 | 1,840 | 1.0 | 1,181.0 | 1,181.0 | 1,181.0 | 0.0 |
| AT | 41,237 | 736 | 1,785 | 1.0 | 1,181.6 | 1,181.6 | 1,181.6 | 0.0 |
| AU | 42,821 | 852 | 1,290 | 1.4 | 1,183.3 | 1,183.3 | 1,183.3 | 0.0 |
| AV | 43,666 | 514 | 1,855 | 1.0 | 1,184.1 | 1,184.1 | 1,184.1 | 0.0 |
| AW | 44,774 | 562 | 1,685 | 1.1 | 1,184.4 | 1,184.4 | 1,184.4 | 0.0 |
| AX | 45,408 | 582 | 1,635 | 1.1 | 1,184.8 | 1,184.8 | 1,184.8 | 0.0 |
| AY | 45,514 | 454 | 1,485 | 1.2 | 1,185.7 | 1,185.7 | 1,185.7 | 0.0 |
| AZ | 46,517 | 532 | 1,575 | 1.1 | 1,186.1 | 1,186.1 | 1,186.1 | 0.0 |
| BA | 47,784 | 312 | 800 | 2.2 | 1,187.1 | 1,187.1 | 1,187.1 | 0.0 |
| BB | 49,104 | 643 | 1,630 | 1.1 | 1,189.0 | 1,189.0 | 1,189.0 | 0.0 |
| BC | 50,054 | 533 | 1,520 | 1.2 | 1,189.9 | 1,189.9 | 1,189.9 | 0.0 |
| BD | 51,269 | 443 | 1,200 | 1.5 | 1,191.2 | 1,191.2 | 1,191.2 | 0.0 |
| BE | 52,272 | 490 | 1,175 | 1.5 | 1,192.3 | 1,192.3 | 1,192.3 | 0.0 |
| BF | 53,170 | 297 | 885 | 2.0 | 1,193.5 | 1,193.5 | 1,193.5 | 0.0 |
| BG | 54,120 | 206 | 580 | 1.9 | 1,194.4 | 1,194.4 | 1,194.4 | 0.0 |
| BH | 55,440 | 361 | 1,215 | 0.9 | 1,194.9 | 1,194.9 | 1,194.9 | 0.0 |
| EAU CLAIRE RIVER | | | | | | | | |
| A | 7,339 | 336 | 2,055 | 5.8 | 1,169.6 | 1,169.6 | 1,169.6 | 0.0 |
| B | 8,501 | 372 | 2,442 | 4.9 | 1,171.3 | 1,171.3 | 1,171.3 | 0.0 |
| C | 9,451 | 722 | 3,696 | 3.2 | 1,172.1 | 1,172.1 | 1,172.1 | 0.0 |

¹FEET ABOVE MOUTH AT WISCONSIN RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

FLOODWAY DATA

BULL JUNIOR CREEK - EAU CLAIRE RIVER

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|---------------------------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| EAU CLAIRE RIVER (CONTINUED) | | | | | | | | |
| D | 12,619 | 1,371 | 7,045 | 1.7 | 1,173.5 | 1,173.5 | 1,173.5 | 0.0 |
| E | 13,570 | 655 | 3,520 | 3.4 | 1,174.2 | 1,174.2 | 1,174.2 | 0.0 |
| F | 14,098 | 713 | 3,198 | 3.7 | 1,174.4 | 1,174.4 | 1,174.4 | 0.0 |
| G | 16,262 | 1,162 | 5,073 | 2.4 | 1,175.4 | 1,175.4 | 1,175.4 | 0.0 |
| H | 17,107 | 1,408 | 5,902 | 2.0 | 1,176.6 | 1,176.6 | 1,176.6 | 0.0 |
| I | 20,856 | 691 | 3,589 | 3.3 | 1,178.5 | 1,178.5 | 1,178.5 | 0.0 |
| J | 21,173 | 374 | 2,709 | 4.4 | 1,178.9 | 1,178.9 | 1,178.9 | 0.0 |
| K | 21,384 | 422 | 2,862 | 4.2 | 1,179.1 | 1,179.1 | 1,179.1 | 0.0 |
| L | 22,598 | 955 | 6,649 | 1.8 | 1,179.8 | 1,179.8 | 1,179.8 | 0.0 |
| M | 27,298 | 1,645 | 6,056 | 1.6 | 1,180.9 | 1,180.9 | 1,180.9 | 0.0 |
| N | 29,410 | 1,247 | 6,310 | 1.6 | 1,182.1 | 1,182.1 | 1,182.1 | 0.0 |
| O | 31,363 | 1,118 | 4,270 | 2.3 | 1,183.2 | 1,183.2 | 1,183.2 | 0.0 |
| P | 33,106 | 566 | 2,436 | 4.1 | 1,185.3 | 1,185.3 | 1,185.3 | 0.0 |
| Q | 34,003 | 239 | 1,569 | 6.3 | 1,186.8 | 1,186.8 | 1,186.8 | 0.0 |
| R | 35,218 | 285 | 1,846 | 5.4 | 1,189.1 | 1,189.1 | 1,189.1 | 0.0 |
| S | 35,429 | 175 | 1,764 | 5.6 | 1,189.3 | 1,189.3 | 1,189.3 | 0.0 |
| T | 36,643 | 228 | 1,651 | 6.0 | 1,191.0 | 1,191.0 | 1,191.0 | 0.0 |
| U | 38,122 | 720 | 4,036 | 2.4 | 1,193.2 | 1,193.2 | 1,193.2 | 0.0 |
| V | 39,019 | 837 | 4,381 | 2.3 | 1,193.9 | 1,193.9 | 1,193.9 | 0.0 |
| W | 40,022 | 1,174 | 4,560 | 2.2 | 1,194.8 | 1,194.8 | 1,194.8 | 0.0 |
| X | 41,870 | 1,319 | 6,556 | 1.6 | 1,197.0 | 1,197.0 | 1,197.0 | 0.0 |
| Y | 43,085 | 1,126 | 5,963 | 1.7 | 1,197.4 | 1,197.4 | 1,197.4 | 0.0 |
| Z | 45,091 | 205 | 1,265 | 7.8 | 1,199.7 | 1,199.7 | 1,199.7 | 0.0 |
| AA | 46,517 | 355 | 2,470 | 4.0 | 1,202.6 | 1,202.6 | 1,202.6 | 0.0 |

¹FEET ABOVE MOUTH AT WISCONSIN RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

FLOODWAY DATA

EAU CLAIRE RIVER

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|---------------------------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| EAU CLAIRE RIVER (CONTINUED) | | | | | | | | |
| AB | 47,731 | 422 | 3,003 | 3.3 | 1,203.8 | 1,203.8 | 1,203.8 | 0.0 |
| AC | 48,946 | 644 | 3,409 | 2.9 | 1,204.8 | 1,204.8 | 1,204.8 | 0.0 |
| AD | 49,790 | 381 | 2,566 | 3.9 | 1,205.3 | 1,205.3 | 1,205.3 | 0.0 |
| AE | 51,322 | 226 | 1,616 | 6.1 | 1,207.3 | 1,207.3 | 1,207.3 | 0.0 |
| AF | 52,958 | 341 | 1,363 | 7.3 | 1,212.9 | 1,212.9 | 1,212.9 | 0.0 |
| AG | 53,170 | 355 | 1,932 | 5.1 | 1,214.0 | 1,214.0 | 1,214.0 | 0.0 |
| AH | 54,226 | 534 | 2,950 | 3.4 | 1,216.4 | 1,216.4 | 1,216.4 | 0.0 |
| AI | 55,176 | 1,013 | 5,000 | 2.0 | 1,217.7 | 1,217.7 | 1,217.7 | 0.0 |
| AJ | 56,760 | 1,547 | 4,350 | 2.3 | 1,219.5 | 1,219.5 | 1,219.5 | 0.0 |
| AK | 58,766 | 447 | 2,730 | 3.6 | 1,222.0 | 1,222.0 | 1,222.0 | 0.0 |
| AL | 60,245 | 554 | 1,800 | 5.5 | 1,223.9 | 1,223.9 | 1,223.9 | 0.0 |
| AM | 62,146 | 1,513 | 6,350 | 1.6 | 1,226.6 | 1,226.6 | 1,226.6 | 0.0 |
| AN | 63,518 | 1,290 | 6,230 | 1.6 | 1,227.3 | 1,227.3 | 1,227.3 | 0.0 |
| AO | 64,838 | 1,043 | 4,440 | 2.2 | 1,228.3 | 1,228.3 | 1,228.3 | 0.0 |
| AP | 66,581 | 1,254 | 5,920 | 1.7 | 1,229.3 | 1,229.3 | 1,229.3 | 0.0 |
| AQ | 69,802 | 981 | 3,510 | 2.8 | 1,231.2 | 1,231.2 | 1,231.2 | 0.0 |
| AR | 71,438 | 803 | 3,440 | 2.9 | 1,233.9 | 1,233.9 | 1,233.9 | 0.0 |
| AS | 72,706 | 1,381 | 7,520 | 1.3 | 1,235.4 | 1,235.4 | 1,235.4 | 0.0 |
| AT | 73,814 | 498 | 2,510 | 3.9 | 1,236.0 | 1,236.0 | 1,236.0 | 0.0 |
| AU | 74,184 | 467 | 2,900 | 3.4 | 1,237.0 | 1,237.0 | 1,237.0 | 0.0 |
| AV | 75,240 | 937 | 3,860 | 2.6 | 1,237.6 | 1,237.6 | 1,237.6 | 0.0 |
| AW | 77,088 | 734 | 3,350 | 3.0 | 1,239.5 | 1,239.5 | 1,239.5 | 0.0 |
| AX | 77,986 | 788 | 3,630 | 2.7 | 1,240.1 | 1,240.1 | 1,240.1 | 0.0 |
| AY | 79,306 | 931 | 6,140 | 1.6 | 1,240.6 | 1,240.6 | 1,240.6 | 0.0 |

¹FEET ABOVE MOUTH AT WISCONSIN RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

FLOODWAY DATA

EAU CLAIRE RIVER

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|---------------------------------|---------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| EAU CLAIRE RIVER (CONTINUED) | | | | | | | | |
| AZ | 81,206 ¹ | 1,012 | 5,830 | 1.7 | 1,241.1 | 1,241.1 | 1,241.1 | 0.0 |
| BA | 82,579 ¹ | 553 | 3,480 | 2.8 | 1,241.9 | 1,241.9 | 1,241.9 | 0.0 |
| BB | 83,635 ¹ | 526 | 2,960 | 3.4 | 1,243.0 | 1,243.0 | 1,243.0 | 0.0 |
| BC | 84,427 ¹ | 558 | 2,700 | 3.7 | 1,243.8 | 1,243.8 | 1,243.8 | 0.0 |
| BD | 85,694 ¹ | 630 | 3,360 | 2.9 | 1,245.1 | 1,245.1 | 1,245.1 | 0.0 |
| BE | 87,014 ¹ | 339 | 2,680 | 3.7 | 1,246.0 | 1,246.0 | 1,246.0 | 0.0 |
| BF | 88,546 ¹ | 313 | 2,030 | 4.9 | 1,247.2 | 1,247.2 | 1,247.2 | 0.0 |
| BG | 89,549 ¹ | 545 | 3,890 | 2.6 | 1,248.2 | 1,248.2 | 1,248.2 | 0.0 |
| BH | 90,816 ¹ | 642 | 3,080 | 3.2 | 1,248.7 | 1,248.7 | 1,248.7 | 0.0 |
| BI | 91,925 ¹ | 561 | 3,030 | 3.3 | 1,249.6 | 1,249.6 | 1,249.6 | 0.0 |
| BJ | 92,189 ¹ | 277 | 2,040 | 4.9 | 1,249.7 | 1,249.7 | 1,249.7 | 0.0 |
| JIM MOORE CREEK A-K | | | | | | | | |
| | * | * | * | * | * | * | * | * |
| JOHNSON CREEK | | | | | | | | |
| A | 18,427 ² | 770 | 3,710 | 0.8 | 1,127.7 | 1,127.7 | 1,127.7 | 0.0 |
| B | 19,589 ² | 754 | 3,350 | 0.9 | 1,127.8 | 1,127.8 | 1,127.8 | 0.0 |
| C | 20,486 ² | 330 | 1,210 | 2.4 | 1,127.9 | 1,127.9 | 1,127.9 | 0.0 |
| D | 22,070 ² | 351 | 1,050 | 2.7 | 1,129.5 | 1,129.5 | 1,129.5 | 0.0 |
| E | 22,968 ² | 613 | 1,970 | 1.5 | 1,130.5 | 1,130.5 | 1,130.5 | 0.0 |
| F | 24,922 ² | 342 | 1,320 | 2.2 | 1,131.2 | 1,131.2 | 1,131.2 | 0.0 |
| G | 25,714 ² | 277 | 960 | 3.0 | 1,131.9 | 1,131.9 | 1,131.9 | 0.0 |
| H | 27,720 ² | 446 | 910 | 3.1 | 1,135.1 | 1,135.1 | 1,135.1 | 0.0 |

¹FEET ABOVE MOUTH AT WISCONSIN RIVER, ²FEET ABOVE MOUTH AT LAKE DU BAY, *DATA NOT AVAILABLE

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

FLOODWAY DATA

EAU CLAIRE RIVER - JIM MOORE CREEK - JOHNSON CREEK

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|------------------------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| JOHNSON CREEK (CONTINUED) | | | | | | | | |
| I | 27,826 | 543 | 2,640 | 1.1 | 1,140.0 | 1,140.0 | 1,140.0 | 0.0 |
| J | 28,406 | 556 | 3,420 | 0.8 | 1,140.1 | 1,140.1 | 1,140.1 | 0.0 |
| K | 29,779 | 454 | 2,400 | 1.2 | 1,140.3 | 1,140.3 | 1,140.3 | 0.0 |
| L | 30,677 | 673 | 3,890 | 0.7 | 1,140.5 | 1,140.5 | 1,140.5 | 0.0 |
| M | 31,627 | 704 | 2,300 | 1.2 | 1,140.6 | 1,140.6 | 1,140.6 | 0.0 |
| N | 32,630 | 177 | 850 | 3.4 | 1,141.2 | 1,141.2 | 1,141.2 | 0.0 |
| O | 34,056 | 263 | 1,040 | 2.7 | 1,142.9 | 1,142.9 | 1,142.9 | 0.0 |
| P | 35,323 | 597 | 2,540 | 1.0 | 1,143.7 | 1,143.7 | 1,143.7 | 0.0 |
| Q | 35,640 | 644 | 2,230 | 1.2 | 1,146.3 | 1,146.3 | 1,146.3 | 0.0 |
| R | 36,854 | 696 | 1,000 | 2.6 | 1,146.7 | 1,146.7 | 1,146.7 | 0.0 |
| S | 38,227 | 840 | 1,850 | 1.4 | 1,148.6 | 1,148.6 | 1,148.6 | 0.0 |
| T | 39,178 | 667 | 1,400 | 1.9 | 1,149.8 | 1,149.8 | 1,149.8 | 0.0 |
| U | 40,392 | 536 | 1,390 | 1.9 | 1,151.8 | 1,151.8 | 1,151.8 | 0.0 |
| V | 41,712 | 613 | 1,300 | 1.7 | 1,154.0 | 1,154.0 | 1,154.0 | 0.0 |
| W | 43,349 | 104 | 340 | 6.6 | 1,157.4 | 1,157.4 | 1,157.4 | 0.0 |
| X | 44,616 | 629 | 3,040 | 0.7 | 1,160.0 | 1,160.0 | 1,160.0 | 0.0 |
| Y | 46,042 | 299 | 640 | 3.5 | 1,160.5 | 1,160.5 | 1,160.5 | 0.0 |
| Z | 47,256 | 563 | 1,080 | 2.1 | 1,163.4 | 1,163.4 | 1,163.4 | 0.0 |
| AA | 48,206 | 298 | 810 | 2.8 | 1,165.4 | 1,165.4 | 1,165.4 | 0.0 |
| AB | 49,157 | 435 | 1,000 | 1.9 | 1,167.0 | 1,167.0 | 1,167.0 | 0.0 |
| AC | 49,843 | 413 | 920 | 2.1 | 1,167.8 | 1,167.8 | 1,167.8 | 0.0 |
| AD | 50,635 | 447 | 720 | 2.6 | 1,169.7 | 1,169.7 | 1,169.7 | 0.0 |
| AE | 51,902 | 432 | 1,270 | 1.5 | 1,171.2 | 1,171.2 | 1,171.2 | 0.0 |
| AF | 53,222 | 185 | 430 | 4.5 | 1,173.1 | 1,173.1 | 1,173.1 | 0.0 |

¹FEET ABOVE MOUTH AT LAKE DU BAY

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

FLOODWAY DATA

JOHNSON CREEK

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|------------------------------|---------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| JOHNSON CREEK (CONTINUED) | | | | | | | | |
| AG | 54,331 ¹ | 294 | 1,170 | 1.6 | 1,175.7 | 1,175.7 | 1,175.7 | 0.0 |
| AH | 56,021 ¹ | 49 | 220 | 8.8 | 1,178.1 | 1,178.1 | 1,178.1 | 0.0 |
| AI | 56,179 ¹ | 680 | 1,900 | 1.0 | 1,180.4 | 1,180.4 | 1,180.4 | 0.0 |
| AJ | 57,288 ¹ | 752 | 650 | 2.9 | 1,181.2 | 1,181.2 | 1,181.2 | 0.0 |
| AK | 58,186 ¹ | 203 | 480 | 3.9 | 1,183.8 | 1,183.8 | 1,183.8 | 0.0 |
| AL | 59,770 ¹ | 129 | 390 | 4.8 | 1,187.1 | 1,187.1 | 1,187.1 | 0.0 |
| AM | 59,928 ¹ | 282 | 1,320 | 1.4 | 1,191.1 | 1,191.1 | 1,191.1 | 0.0 |
| AN | 61,406 ¹ | 242 | 720 | 2.6 | 1,191.9 | 1,191.9 | 1,191.9 | 0.0 |
| AO | 62,462 ¹ | 179 | 640 | 3.0 | 1,193.0 | 1,193.0 | 1,193.0 | 0.0 |
| AP | 63,466 ¹ | 228 | 580 | 3.3 | 1,195.0 | 1,195.0 | 1,195.0 | 0.0 |
| AQ | 64,258 ¹ | 258 | 510 | 2.7 | 1,198.4 | 1,198.4 | 1,198.4 | 0.0 |
| AR | 65,314 ¹ | 76 | 220 | 6.3 | 1,201.9 | 1,201.9 | 1,201.9 | 0.0 |
| AS | 66,634 ¹ | 250 | 610 | 2.2 | 1,206.1 | 1,206.1 | 1,206.1 | 0.0 |
| AT | 67,267 ¹ | 161 | 340 | 4.0 | 1,208.1 | 1,208.1 | 1,208.1 | 0.0 |
| LITTLE RIB RIVER | | | | | | | | |
| A | 4,910 ² | 856 | 6,190 | 2.4 | 1,173.7 | 1,173.7 | 1,173.7 | 0.0 |
| B | 5,386 ² | 1,000 | 6,360 | 2.3 | 1,174.6 | 1,174.6 | 1,174.6 | 0.0 |
| C | 5,966 ² | 804 | 6,036 | 2.5 | 1,175.3 | 1,175.3 | 1,175.3 | 0.0 |
| D | 6,230 ² | 594 | 5,696 | 2.7 | 1,175.5 | 1,175.5 | 1,175.5 | 0.0 |
| E | 6,917 ² | 500 | 5,524 | 2.7 | 1,176.1 | 1,176.1 | 1,176.1 | 0.0 |
| F | 7,234 ² | 180 | 1,690 | 9.0 | 1,176.2 | 1,176.2 | 1,176.2 | 0.0 |
| G | 7,392 ² | 146 | 1,687 | 9.0 | 1,176.2 | 1,176.2 | 1,176.2 | 0.0 |
| H | 7,814 ² | 157 | 1,482 | 10.2 | 1,178.3 | 1,178.3 | 1,178.3 | 0.0 |

¹FEET ABOVE MOUTH AT LAKE DU BAY, ²FEET ABOVE CONFLUENCE WITH BIG RIB RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

FLOODWAY DATA

JOHNSON CREEK - LITTLE RIB RIVER

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|------------------|---------------------|-----------------|-------------------------------------|--|---|----------------------|------------------|----------|
| CROSS SECTION | DISTANCE | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| LITTLE RIB RIVER | | | | | | | | |
| I | 7,867 ¹ | 715 | 8,530 | 1.8 | 1,181.2 | 1,181.2 | 1,181.2 | 0.0 |
| J | 9,082 ¹ | 1,092 | 12,713 | 1.2 | 1,181.6 | 1,181.6 | 1,181.6 | 0.0 |
| K | 9,926 ¹ | 1,104 | 13,290 | 1.1 | 1,181.8 | 1,181.8 | 1,181.8 | 0.0 |
| L | 10,560 ¹ | 1,249 | 14,004 | 1.1 | 1,181.9 | 1,181.9 | 1,181.9 | 0.0 |
| M | 11,458 ¹ | 850 | 8,423 | 1.8 | 1,182.4 | 1,182.4 | 1,182.4 | 0.0 |
| POTATO CREEK | | | | | | | | |
| A | 370 ² | 50 | 205 | 10.8 | 1,317.9 | 1,314.9 ³ | 1,314.9 | 0.0 |
| B | 528 ² | 240 | 416 | 5.3 | 1,319.3 | 1,319.3 | 1,319.3 | 0.0 |
| C | 845 ² | 240 | 446 | 4.9 | 1,320.5 | 1,320.5 | 1,320.5 | 0.0 |
| D | 950 ² | 150 | 589 | 3.7 | 1,323.0 | 1,323.0 | 1,323.0 | 0.0 |
| E | 1,267 ² | 215 | 528 | 4.2 | 1,323.4 | 1,323.4 | 1,323.4 | 0.0 |
| F | 1,531 ² | 200 | 696 | 3.2 | 1,324.9 | 1,324.9 | 1,324.9 | 0.0 |
| G | 1,901 ² | 200 | 704 | 3.1 | 1,325.5 | 1,325.5 | 1,325.5 | 0.0 |
| H | 2,218 ² | 120 | 377 | 5.8 | 1,325.9 | 1,325.9 | 1,325.9 | 0.0 |
| WISCONSIN RIVER | | | | | | | | |
| A | 268.63 ⁴ | 3,538 | 23,529 | 5.1 | 1,146.7 | 1,146.7 | 1,146.7 | 0.0 |
| B | 269.31 ⁴ | 2,492 | 20,388 | 5.9 | 1,147.9 | 1,147.9 | 1,147.9 | 0.0 |
| C | 279.73 ⁴ | 1,976 | 16,357 | 5.8 | 1,148.6 | 1,148.6 | 1,148.6 | 0.0 |
| D | 270.15 ⁴ | 1,372 | 16,235 | 5.9 | 1,149.3 | 1,149.3 | 1,149.3 | 0.0 |
| E | 270.78 ⁴ | 1,631 | 16,481 | 6.2 | 1,150.5 | 1,150.5 | 1,150.5 | 0.0 |
| F | 271.27 ⁴ | 898 | 11,465 | 6.5 | 1,151.4 | 1,151.4 | 1,151.4 | 0.0 |
| G | 271.90 ⁴ | 1,100 | 11,411 | 7.1 | 1,152.7 | 1,152.7 | 1,152.7 | 0.0 |
| H | 272.43 ⁴ | 925 | 11,610 | 6.8 | 1,153.8 | 1,153.8 | 1,153.8 | 0.0 |

¹FEET ABOVE CONFLUENCE WITH BIG RIB RIVER, ²FEET ABOVE CONFLUENCE WITH BLACK CREEK, ³ELEVATION COMPUTED WITHOUT CONSIDERATION OF BACKWATER EFFECTS FROM BLACK RIVER, ⁴MILES ABOVE MOUTH AT MISSISSIPPI RIVER

TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

FLOODWAY DATA

LITTLE RIB RIVER - POTATO CREEK - WISCONSIN RIVER

| FLOODING SOURCE | | FLOODWAY | | | 1-PERCENT-ANNUAL-CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD 88) | | | |
|--------------------------------|-----------------------|-----------------|-------------------------------------|--|---|---------------------|------------------|----------|
| CROSS SECTION | DISTANCE ¹ | WIDTH (FEET) | SECTION AREA (SQUARE FEET) | MEAN VELOCITY (FEET PER SECOND) | REGULATORY | WITHOUT FLOODWAY | WITH FLOODWAY | INCREASE |
| WISCONSIN RIVER (CONTINUED) | | | | | | | | |
| I | 273.14 | 902 | 13,780 | 5.1 | 1,155.1 | 1,155.1 | 1,155.1 | 0.0 |
| J | 273.44 | 577 | 10,992 | 5.8 | 1,155.4 | 1,155.4 | 1,155.4 | 0.0 |
| K | 273.46 | 629 | 13,652 | 4.7 | 1,155.7 | 1,155.7 | 1,155.7 | 0.0 |
| L | 273.88 | 800 | 11,875 | 6.5 | 1,156.0 | 1,156.0 | 1,156.0 | 0.0 |
| M | 274.22 | 686 | 11,154 | 6.1 | 1,156.6 | 1,156.6 | 1,156.6 | 0.0 |
| N | 274.67 | 557 | 10,241 | 6.6 | 1,157.2 | 1,157.2 | 1,157.2 | 0.0 |
| O | 274.87 | 502 | 10,093 | 6.3 | 1,157.6 | 1,157.6 | 1,157.6 | 0.0 |
| P | 275.11 | 473 | 10,372 | 6.2 | 1,158.0 | 1,158.0 | 1,158.0 | 0.0 |
| Q | 275.28 | 509 | 11,353 | 5.6 | 1,158.3 | 1,158.3 | 1,158.3 | 0.0 |
| R | 275.44 | 786 | 31,882 | 2.1 | 1,158.8 | 1,158.8 | 1,158.8 | 0.0 |
| S - AX | * | * | * | * | * | * | * | * |

¹MILES ABOVE MOUTH AT MISSISSIPPI RIVER, *DATA NOT AVAILABLE


TABLE 7

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

FLOODWAY DATA

WISCONSIN RIVER

FIGURE 2 – FLOODWAY SCHEMATIC

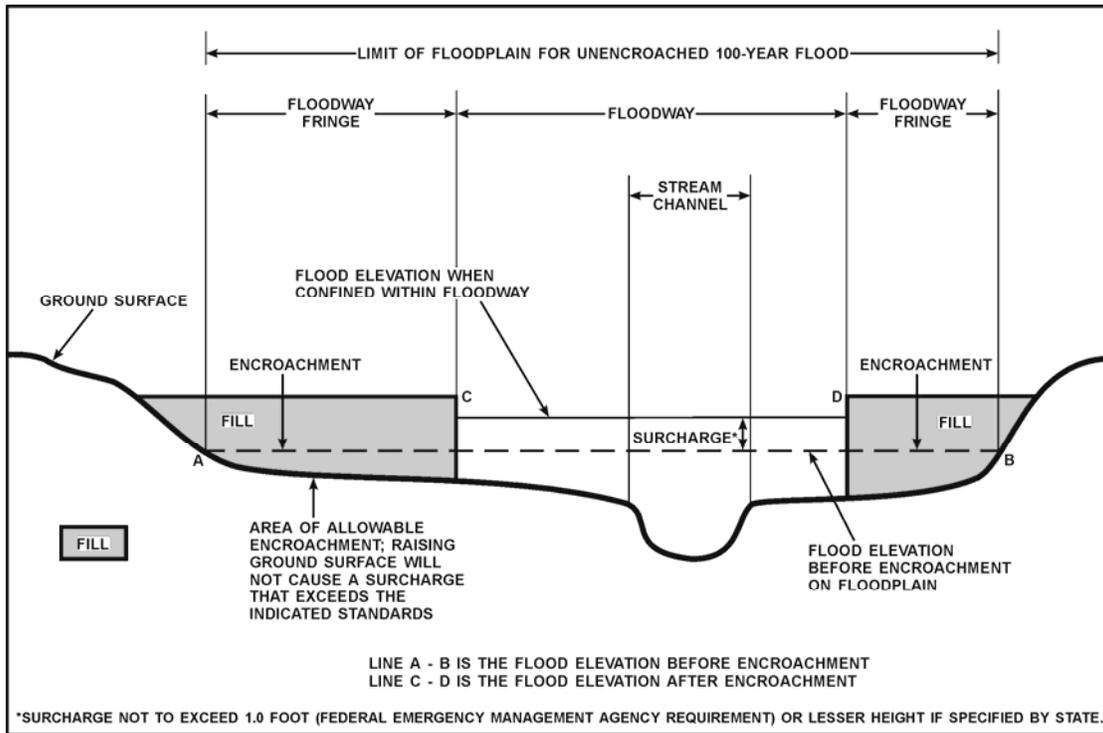

5.0 INSURANCE APPLICATION

For flood insurance rating purposes, flood insurance zone designations are assigned to a community based on the results of the engineering analyses. The zones are as follows:

Zone A

Zone A is the flood insurance rate zone that corresponds to the 1-percent floodplains that are determined in the FIS by approximate methods. Because detailed hydraulic analyses are not performed for such areas, no base (1-percent annual chance) flood elevations or depths are shown within this zone.

Zone AE

Zone AE is the flood insurance rate zone that corresponds to the 1-percent annual chance floodplains that are determined in the FIS by detailed methods. In most instances, whole-foot base flood elevations derived from the detailed hydraulic analyses are shown at selected intervals within this zone.

Zone AO

Zone AO is the flood insurance rate zone that corresponds to areas of 1-percent-annual-chance shallow flooding (usually sheet flow on sloping terrain) where

average depths are between 1 and 3 feet. Average whole-foot depths derived from the detailed hydraulic analyses are shown within this zone.

Zone X

Zone X is the flood insurance rate zone that corresponds to areas outside the 0.2-percent annual chance floodplain, areas within the 0.2-percent annual chance floodplain, and to areas of 1-percent annual chance flooding where average depths are less than 1 foot, areas of 1-percent annual chance flooding where the contributing drainage area is less than 1 square mile, and areas protected from the 1-percent annual chance flood by levees. No base flood elevations or depths are shown within this zone.

6.0 **FLOOD INSURANCE RATE MAP**

The FIRM is designed for flood insurance and floodplain management applications.

For flood insurance applications, the map designates flood insurance rate zones as described in Section 5.0 and, in the 1-percent-annual-chance floodplains that were studied by detailed methods, shows selected whole-foot base flood elevations or average depths. Insurance agents use zones and base flood elevations in conjunction with information on structures and their contents to assign premium rates for flood insurance policies.

For floodplain management applications, the map shows by tints, screens, and symbols, the 1- and 0.2-percent-annual-chance floodplains. Floodways and the locations of selected cross sections used in the hydraulic analyses and floodway computations are shown where applicable.

The countywide FIRM presents flooding information for the entire geographic area of Marathon County. Previously, FIRMs were prepared for each incorporated community and the unincorporated areas of the County identified as flood-prone. This countywide FIRM also includes flood-hazard information that was presented separately on Flood Boundary and Floodway Maps (FBFMs), where applicable. Historical data relating to the maps prepared for each community are presented in Table 8, "Community Map History."

| COMMUNITY NAME | INITIAL IDENTIFICATION | FLOOD HAZARD BOUNDARY MAP REVISION DATE(S) | FLOOD INSURANCE RATE MAP EFFECTIVE DATE | FLOOD INSURANCE RATE MAP REVISION DATE(S) |
|--|------------------------|--|---|---|
| Abbotsford, City of (Dual County Community) (Clark County) | July 22, 2010 | None | July 22, 2010 | None |
| Athens, Village of | May 31, 1974 | May 14, 1976 | August 15, 1980 | None |
| ¹ Birnamwood, Village of (Dual County Community) (Shawano County) | May 31, 1974 | May 14, 1976 | August 19, 1985 | None |
| Brokaw, Village of | December 17, 1973 | May 21, 1976 | June 1, 1988 | None |
| Colby, City of (Dual County Community) (Clark County) | May 31, 1974 | March 19, 1976 March 23, 1979 | September 18, 1985 | None |
| ¹ Dorchester, Village of (Dual County Community) (Clark County) | N/A | None | N/A | None |
| Edgar, Village of | December 3, 1976 | None | September 30, 1988 | None |
| Elderon, Village of | July 19, 1974 | July 30, 1976 | July 22, 2010 | None |
| Fenwood, Village of | August 2, 1974 | May 14, 1976 | July 22, 2010 | None |
| Hatley, Village of | July 19, 1974 | May 14, 1976 | September 27, 1985 | None |

¹No Special Flood Hazard Areas identified

| | | |
|----------------|---|------------------------------|
| TABLE 8 | FEDERAL EMERGENCY MANAGEMENT AGENCY | COMMUNITY MAP HISTORY |
| | MARATHON COUNTY, WI AND INCORPORATED AREAS | |

| COMMUNITY NAME | INITIAL IDENTIFICATION | FLOOD HAZARD BOUNDARY MAP REVISION DATE(S) | FLOOD INSURANCE RATE MAP EFFECTIVE DATE | FLOOD INSURANCE RATE MAP REVISION DATE(S) |
|--|--------------------------------|--|---|--|
| Kronenwetter, Village of | August 3, 1981 ¹ | None | August 3, 1981 ¹ | None |
| Marathon City, Village of | November 30, 1973 | May 21, 1976 | August 15, 1980 | None |
| Marathon County (Unincorporated Areas) | February 1, 1979 | None | February 1, 1979 | August 3, 1981 |
| ² Marshfield, City of (Dual County Community) (Wood County) | February 17, 2010 ³ | None | February 17, 2010 ³ | None |
| Mosinee, City of | December 16, 1973 | None | December 16, 1973 | July 1, 1974 November 14, 1975 |
| Rothschild, Village of | May 11, 1973 | None | May 11, 1973 | July 1, 1974 May 21, 1976 January 21, 1977 March 31, 1978 |
| Schofield, City of | July 13, 1973 | None | July 13, 1973 | July 1, 1974 March 12, 1976 February 8, 1980 |
| ⁴ Spencer, Village of | N/A | None | N/A | None |

¹Formerly shown on the Marathon County (Unincorporated Areas) Flood Insurance Rate Map ²No Special Flood Hazard Areas identified within Marathon County
³Wood County and Incorporated Areas Flood Insurance Rate Map ⁴No Special Flood Hazard Areas identified

| | | |
|----------------|---|------------------------------|
| TABLE 8 | FEDERAL EMERGENCY MANAGEMENT AGENCY | COMMUNITY MAP HISTORY |
| | MARATHON COUNTY, WI AND INCORPORATED AREAS | |

| COMMUNITY NAME | INITIAL IDENTIFICATION | FLOOD HAZARD BOUNDARY MAP REVISION DATE(S) | FLOOD INSURANCE RATE MAP EFFECTIVE DATE | FLOOD INSURANCE RATE MAP REVISION DATE(S) |
|---|-----------------------------|--|---|---|
| Stratford, Village of | December 17, 1973 | May 21, 1976 | May 1, 1987 | None |
| ¹ Unity, Village of (Dual County Community) (Clark County) | September 20, 1974 | June 4, 1976 | July 6, 2010 ² | None |
| Wausau, City of | January 5, 1978 | None | January 5, 1978 | None |
| Weston, Village of | August 3, 1981 ³ | None | August 3, 1981 ³ | None |

¹No Special Flood Hazard Areas identified within Marathon County ²Clark County and Incorporated Areas Flood Insurance Rate Map

³Formerly shown on the Marathon County (Unincorporated Areas) Flood Insurance Rate Map

| | | |
|----------------|---|------------------------------|
| TABLE 8 | FEDERAL EMERGENCY MANAGEMENT AGENCY MARATHON COUNTY, WI AND INCORPORATED AREAS | COMMUNITY MAP HISTORY |
|----------------|---|------------------------------|

7.0 **OTHER STUDIES**

This FIS report either supersedes or is compatible with all previous studies published on streams studied in this report and should be considered authoritative for the purposes of the NFIP.

The countywide studies for Clark, Lincoln, Portage, and Wood counties in Wisconsin are in progress and might impact the information presented in this countywide FIS report.

8.0 **LOCATION OF DATA**

Information concerning the pertinent data used in preparation of this FIS can be obtained by contacting Federal Insurance and Mitigation Division, FEMA Region V, 536 South Clark Street, Sixth Floor, Chicago, Illinois 60605.

9.0 **BIBLIOGRAPHY AND REFERENCES**

1. U.S. Department of Commerce, Bureau of the Census. (1990, 2000). Census of Population, Wisconsin, Washington, D.C.
2. Village Clerk, Oral Communications, Village of Athens, Wisconsin.
3. U.S. Department of Housing and Urban Development, Flood Insurance Administration. (1975). Flood Insurance Study, City of Mosinee, Wisconsin.
4. U.S. Geological Survey. (1973). Flood Plain and Floodway Delineation for Regional Flood in Central Marathon County, Wisconsin. Madison, Wisconsin.
5. U.S. Water Resources Council, Bulletin No. 17A. (1977). Guidelines for Determining Flood Flow Frequency.
6. D. H. Conger. (1971). Estimating Magnitude and Frequency of Floods in Wisconsin. U.S. Geological Survey, Open-File Report.
7. U.S. Water Resources Council, Bulletin No. 17. (1976). Guidelines for Determining Flood Flow Frequency.
8. U.S. Department of Housing and Urban Development, Federal Insurance Administration. (1979). Flood Insurance Study, Marathon County, Unincorporated Areas, Wisconsin.
9. E.A. Bell and M.G. Sherrill. (1971). Water Availability in Central Wisconsin – An Area of Near Surface Crystalline Rock. U.S. Geological Survey, Open-File Report.
10. W.G. Gannon. (1972). Flood Insurance Study of Marathon County, Wisconsin. Unpublished report.

11. H.F. Matthai. (1967). Measurement of Peak Discharge at Width Contractions by Indirect Methods: Techniques of Water Resource Investigations, Book 3, Chapter A3.
12. U.S. Department of the Interior, Geological Survey. (1980). Streamflow of Wisconsin River for Estimating Flood Frequency and Volume. Water Resource Investigations, Open File Report, 80-1103.
13. H. Hulsing. (1967). Measurement of Peak Discharge at Dams by Indirect Methods. U.S. Geological Survey, Open-File Report.
14. J.O. Shearman. (1976). Computer Applications for Step-Backwater and Floodway Analysis. U.S. Geological Survey, Open-File Report 76-499.
15. U.S. Geological Survey, Flood-Prone Area Maps, 15-and 7.5-Minutes Series, Scales of 1:24000, Contour Intervals 10 feet: Merrill Quadrangle, Wisconsin (1969); Abbotsford Quadrangle, Wisconsin (1974); Stratford Quadrangle, Wisconsin (1973); Marathon Quadrangle, Wisconsin (1973); Wausau West Quadrangle, Wisconsin (1969); Wausau East Quadrangle, Wisconsin (1969); Wausau Quadrangle, Wisconsin (1969); Hatley Quadrangle, Wisconsin (1973); Granton Quadrangle, Wisconsin (1974); Marshfield Quadrangle, Wisconsin (1973); Honey Island Quadrangle, Wisconsin (1973); Big Eau Pleine Reservoir Quadrangle, Wisconsin (1973); Dancy Quadrangle, Wisconsin (1973); Rosholt N.W. Quadrangle, Wisconsin (1973).
16. U.S. Geological Survey, Marathon County, Wisconsin. (1974). Aerial Coverage, Hamburg and Athens Quadrangle, GS-VCZG.
17. U.S. Department of Agriculture, Soil Conservation Service. (1968). Aerial Photographs: Athens, Wisconsin.
18. W.R. Krug and R.S. Grant. (1973). Flood Insurance Study of Schofield, Wisconsin. U.S. Geological Survey, Open-File Report.
19. U.S. Geological Survey, 7.5-Minute Series Maps: Scale 1:24000, Contour Interval of 10 feet: Wausau West, Wisconsin (1969); Wausau East, Wisconsin (1969); Honey Island, Wisconsin (1973); Big Eau Pleine Reservoir, Wisconsin (1973); Dancy, Wisconsin (1973); Marsh, Wisconsin (1970); Rosholt N. W., Wisconsin (1969); Rosholt (1969); Tigerton N.W., Wisconsin (1970).
20. U.S. Geological Survey, 15-Minute Series Flood-Prone Area Maps, Scale 1:62500, Contour Interval of 10 feet: Athens, Wisconsin (1951); Hamburg, Wisconsin (1951); Merrill, Wisconsin (1969); Doering, Wisconsin (1951); Antigo, Wisconsin (1952); Abbotsford, Wisconsin (1974); Stratford, Wisconsin (1973); Marathon, Wisconsin (1973); Hatley, Wisconsin (1973); Wittenberg, Wisconsin (1974); Marshfield, Wisconsin (1973); Granton, Wisconsin (1974); Wausau, Wisconsin (1969).

21. U.S. Geological Survey. (1951). 15 Minute Series Topographic Maps, Athens Quadrangle, Wisconsin. Scale 1:62500, Contour Interval of 20 feet.
22. U.S. Geological Survey. (1963). Topographic Quadrangle Map, Marathon, Wisconsin. Scale 1:62500, Contour Interval of 20 feet.
23. U.S. Department of Agriculture, Soil Conservation Service. (1968). Aerial Photographs: Village of Marathon City, Wisconsin.
24. Wisconsin Department of Natural Resources. (2004). Wisconsin's Floodplain Management Program. Chapter NR116, Register No. 584.

L. Martin. (1932). The Physical Geography of Wisconsin. Wisconsin Geological and Natural History Survey.

U.S. Department of Commerce, National Oceanic and Atmospheric Administration, (1973). Monthly Normals of Temperature, Precipitation, and Heating and Cooling Degree Days, 1941-70.

Hole, F.D. (1976). Soils of Wisconsin. University of Wisconsin Extension, Geological and Natural History Survey.

L.M. Andrews and H. Carlson. (1977). Surface Water Resources of Marathon County, Wisconsin. Wisconsin Department of Natural Resources.

Wisconsin Department of Administration, Madison, WI. (1977). The State of Wisconsin Blue Book.

U.S. Department of Housing and Urban Development, Federal Insurance Administration. (1976). Flood Hazard Boundary Map, Village of Athens, Wisconsin.

Wisconsin Department of Administration. (1978). Official Population Estimates for 1978.

Wisconsin Department of Natural Resources. (1977). Wisconsin's Flood Plain Management Program, Chapter NR 116, Register No. 259.

Wisconsin Department of Natural Resources, Publication No. 3-880 (75). (1975). Natural Resources Use Controls and Assistance.

Federal Emergency Management Agency, Flood Insurance Administration. (1980). Flood Insurance Study, Village of Athens, Wisconsin.

Federal Emergency Management Agency, Flood Insurance Administration. (1980). Flood Insurance Study, Village of Marathon City, Wisconsin.

Federal Emergency Management Agency, Flood Insurance Administration. (1977). Flood Insurance Study, City of Wausau, Wisconsin.

Federal Emergency Management Agency, Flood Insurance Administration. (1976). Flood Insurance Study, City of Schofield, Wisconsin.

Federal Emergency Management Agency, Flood Insurance Administration. (1983). Flood Insurance Study, Portage County, Wisconsin.

Federal Emergency Management Agency, Flood Insurance Administration. (1979). Communication with P. Hughes, Madison, Wisconsin.

U.S. Department of Housing and Urban Development, Flood Insurance Administration. (1978). Flood Insurance Study, Village of Rothschild, Wisconsin.

Marathon County Planning Commission, Wausau, Wisconsin. Town Maps, Scale 1:24000: Town of Wausau (1979); Town of Weston (1977); Town of Mosinee (1979), Town of Knowlton (1978); Town of Stettin (undated); Town of Kronenwetter (1979); and Town of Rib Mountain (1978).


W.R. Krug, R.S. Grant, and M.D. Duerk, (Unpublished report). Flood Plain and Floodway Delineation for Regional Flood in Central Marathon County, Wisconsin. U.S. Geological Survey, Open-File Report.

G.L. Bodhaine. (1960). Measurements of Peak Discharge at Culverts by Indirect Methods: Techniques of Water Resources Investigations, Book 3, Chapter A3. , U.S. Geological Survey Open-File Report.

U.S. Department of Housing and Urban Development, Federal Insurance Administration. (1973). Flood Hazard Boundary Map, Village of Marathon City, Wisconsin.

Becher & Hoppe Engineering, Schofield, Wisconsin. Map of Village of Athens, Wisconsin, Scale 1:6000.


Chow, V.T. (1959) Open Channel Hydraulics. New York: McGraw-Hill Book Company, Inc.

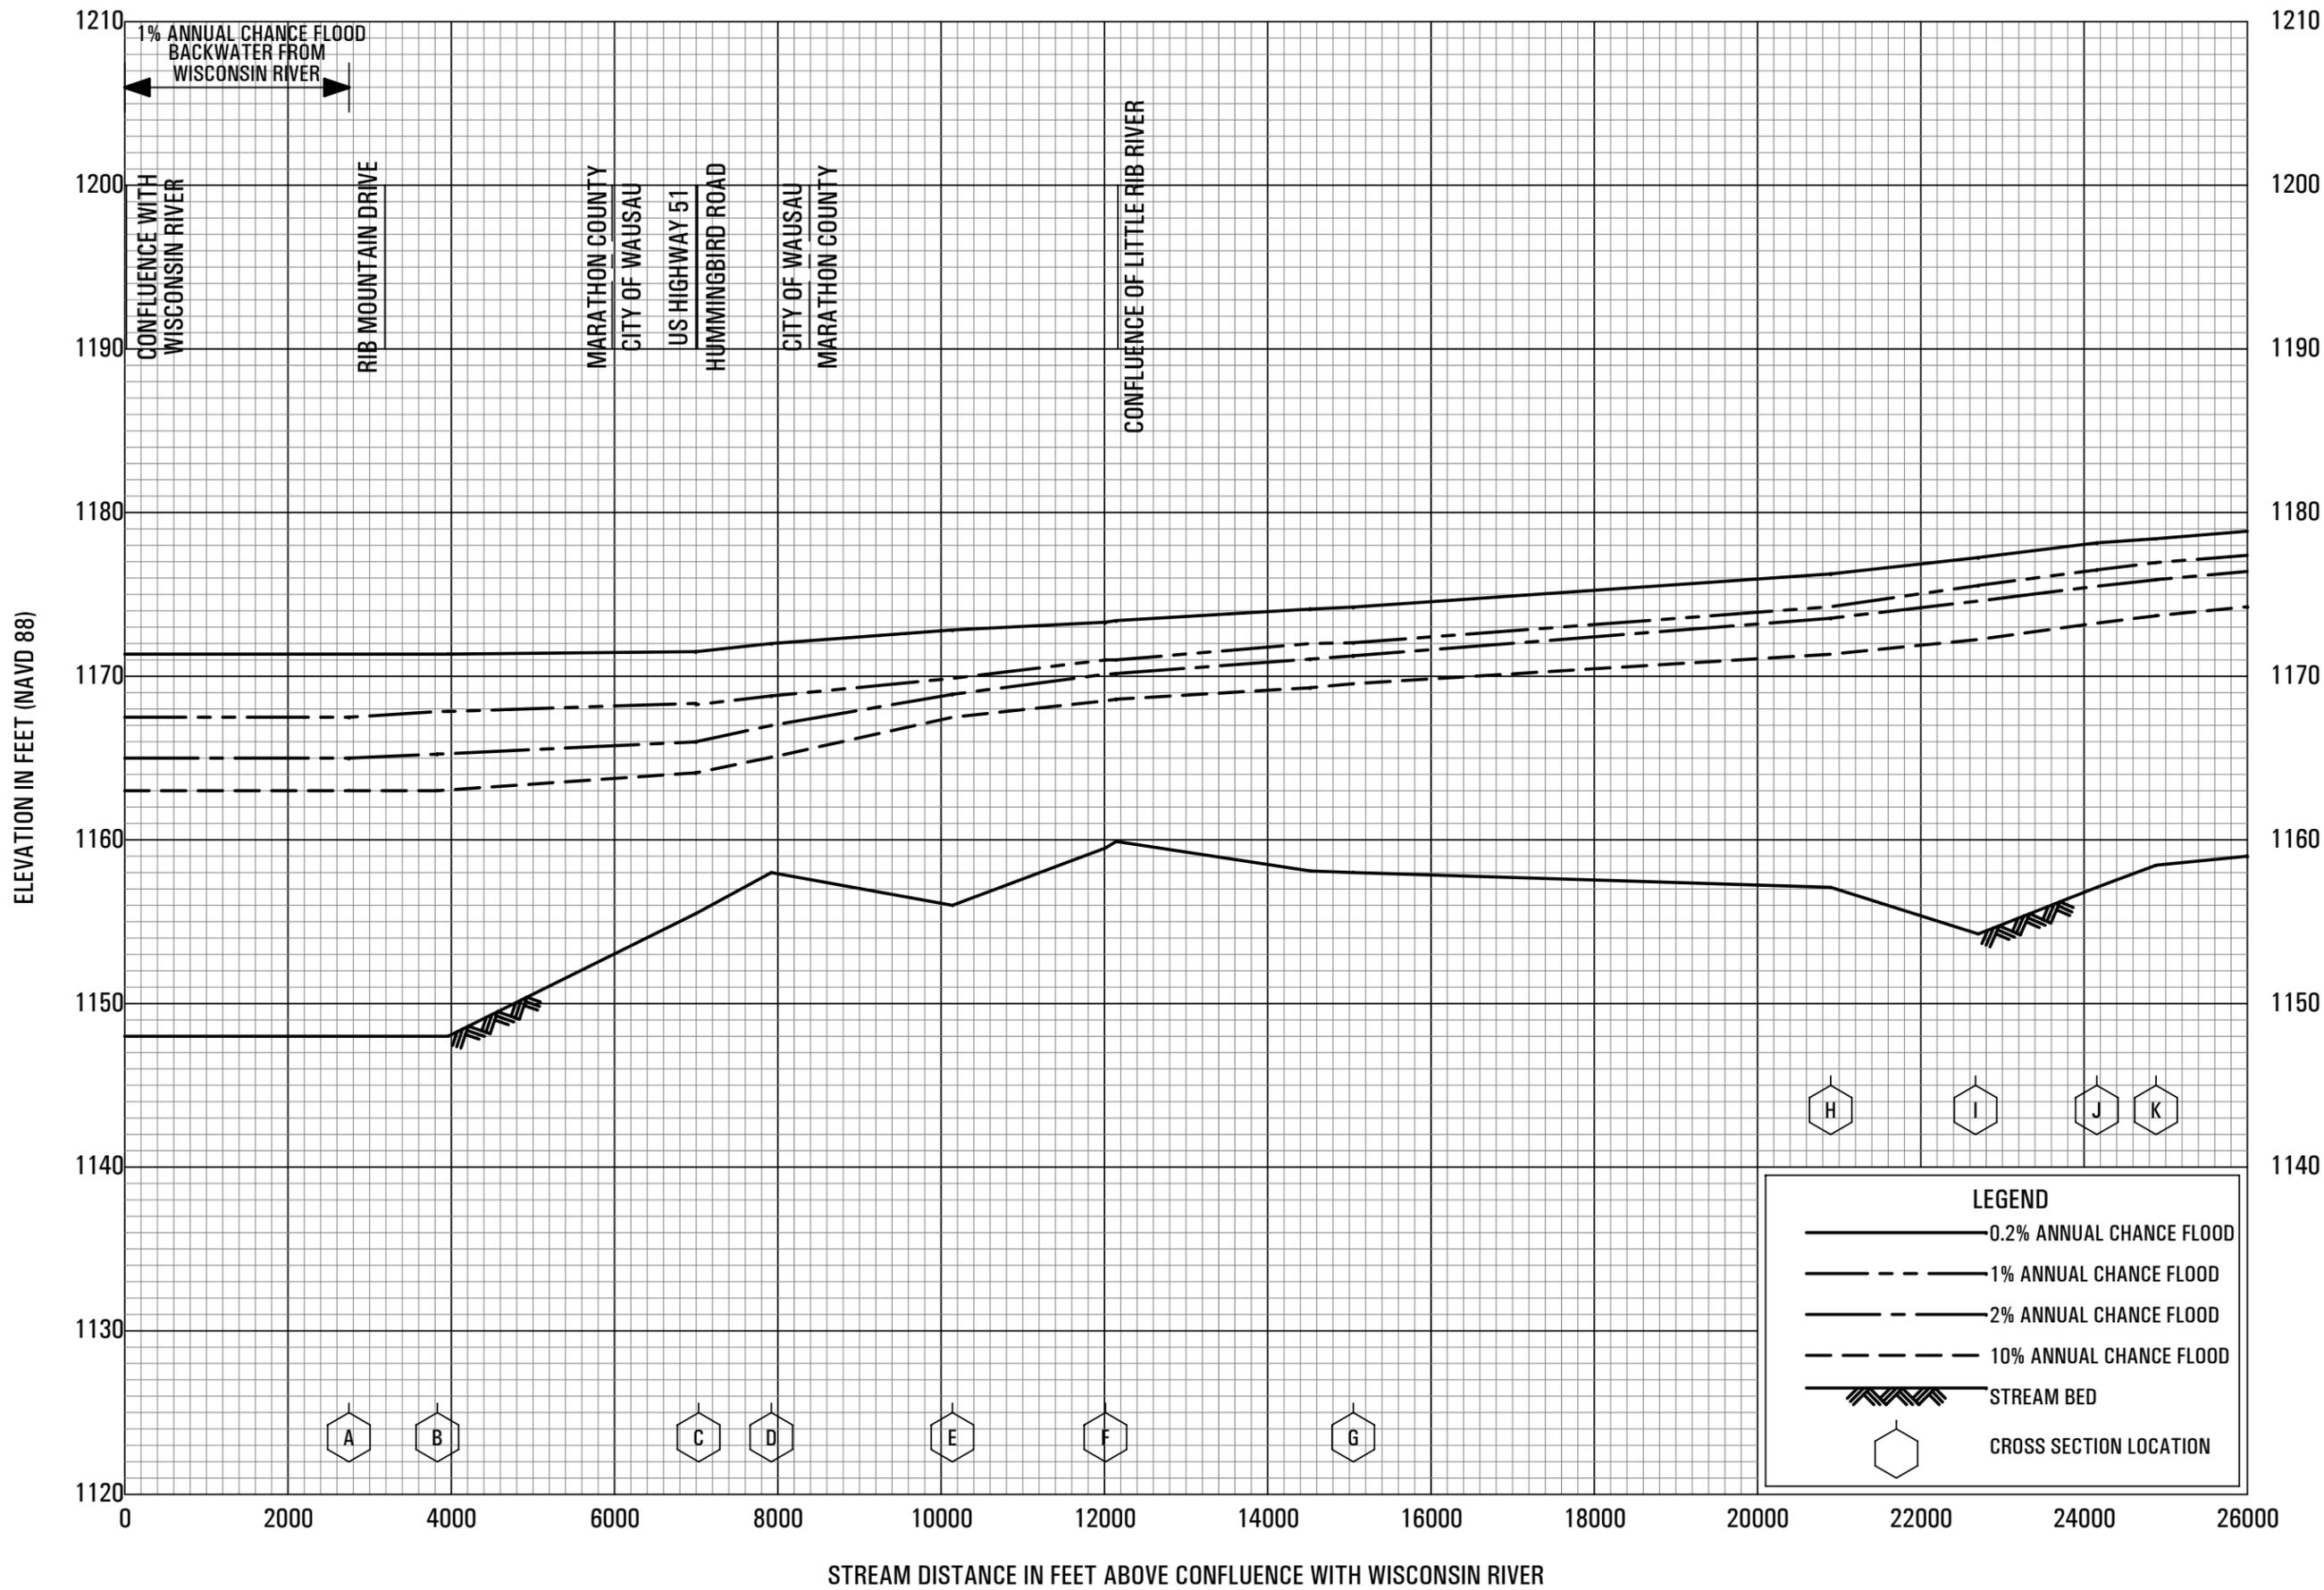

FLOOD PROFILES

BIG RIB RIVER


**FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS**

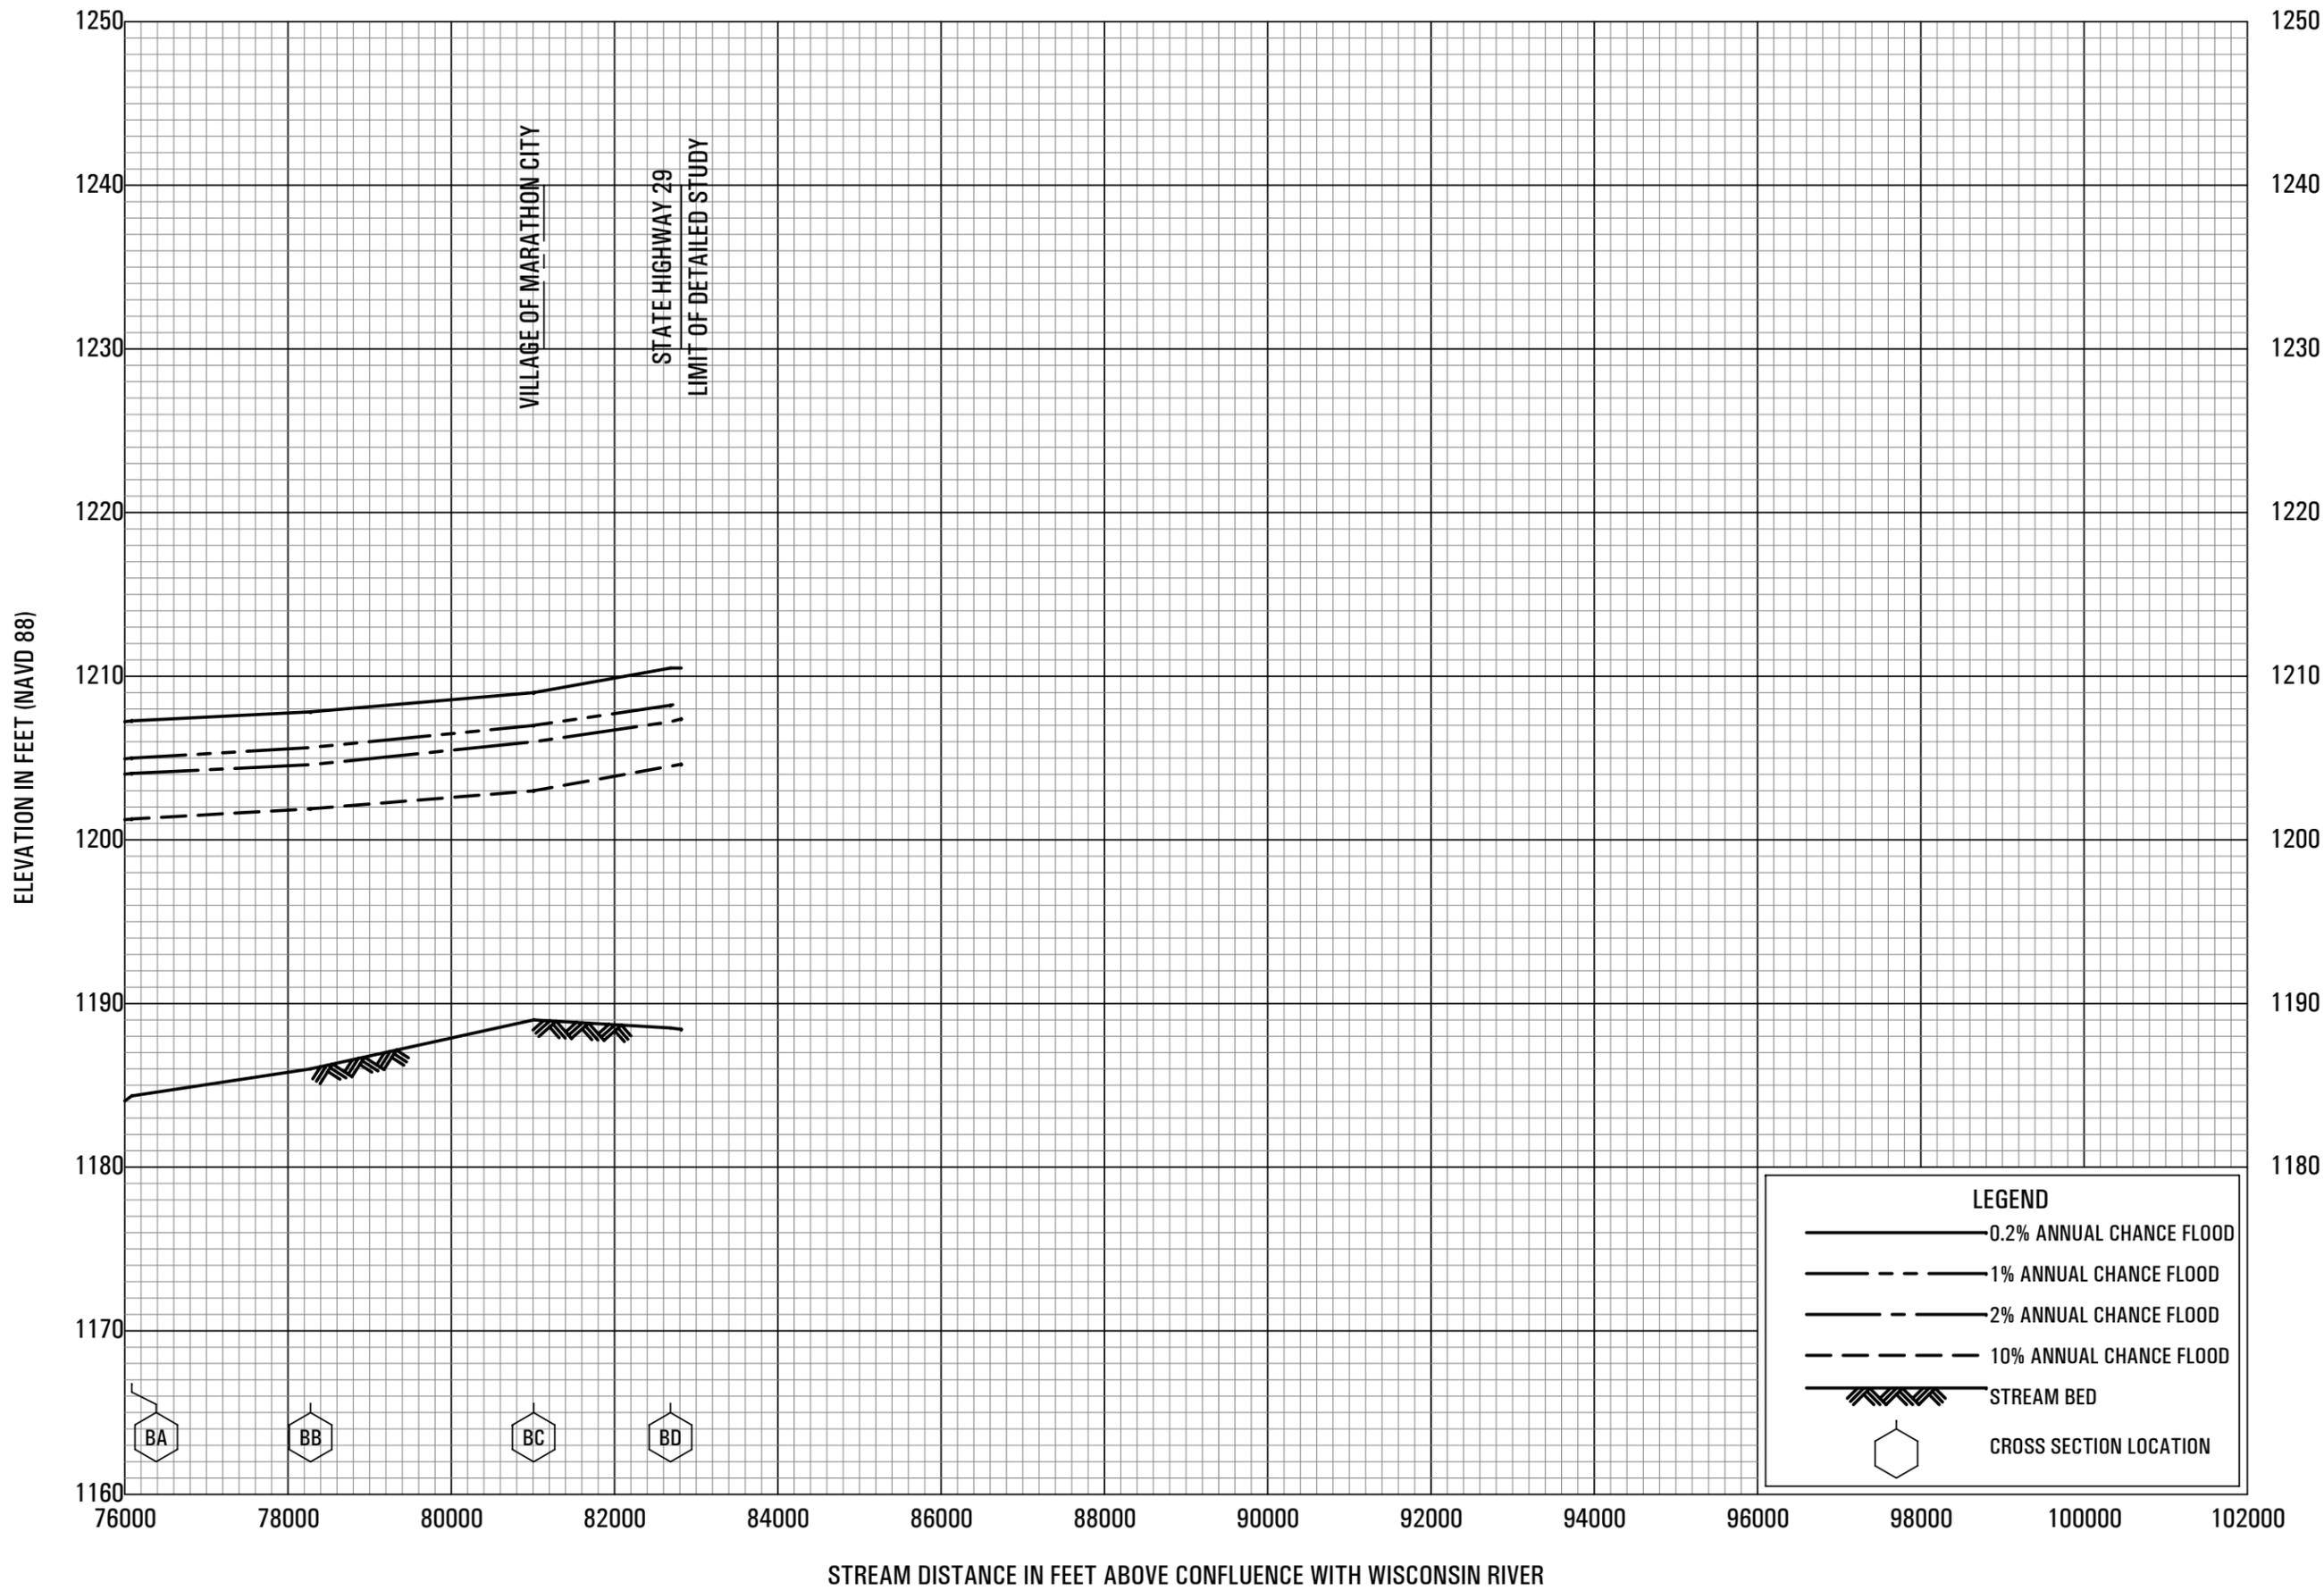

FLOOD PROFILES

BIG RIB RIVER

**FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS**

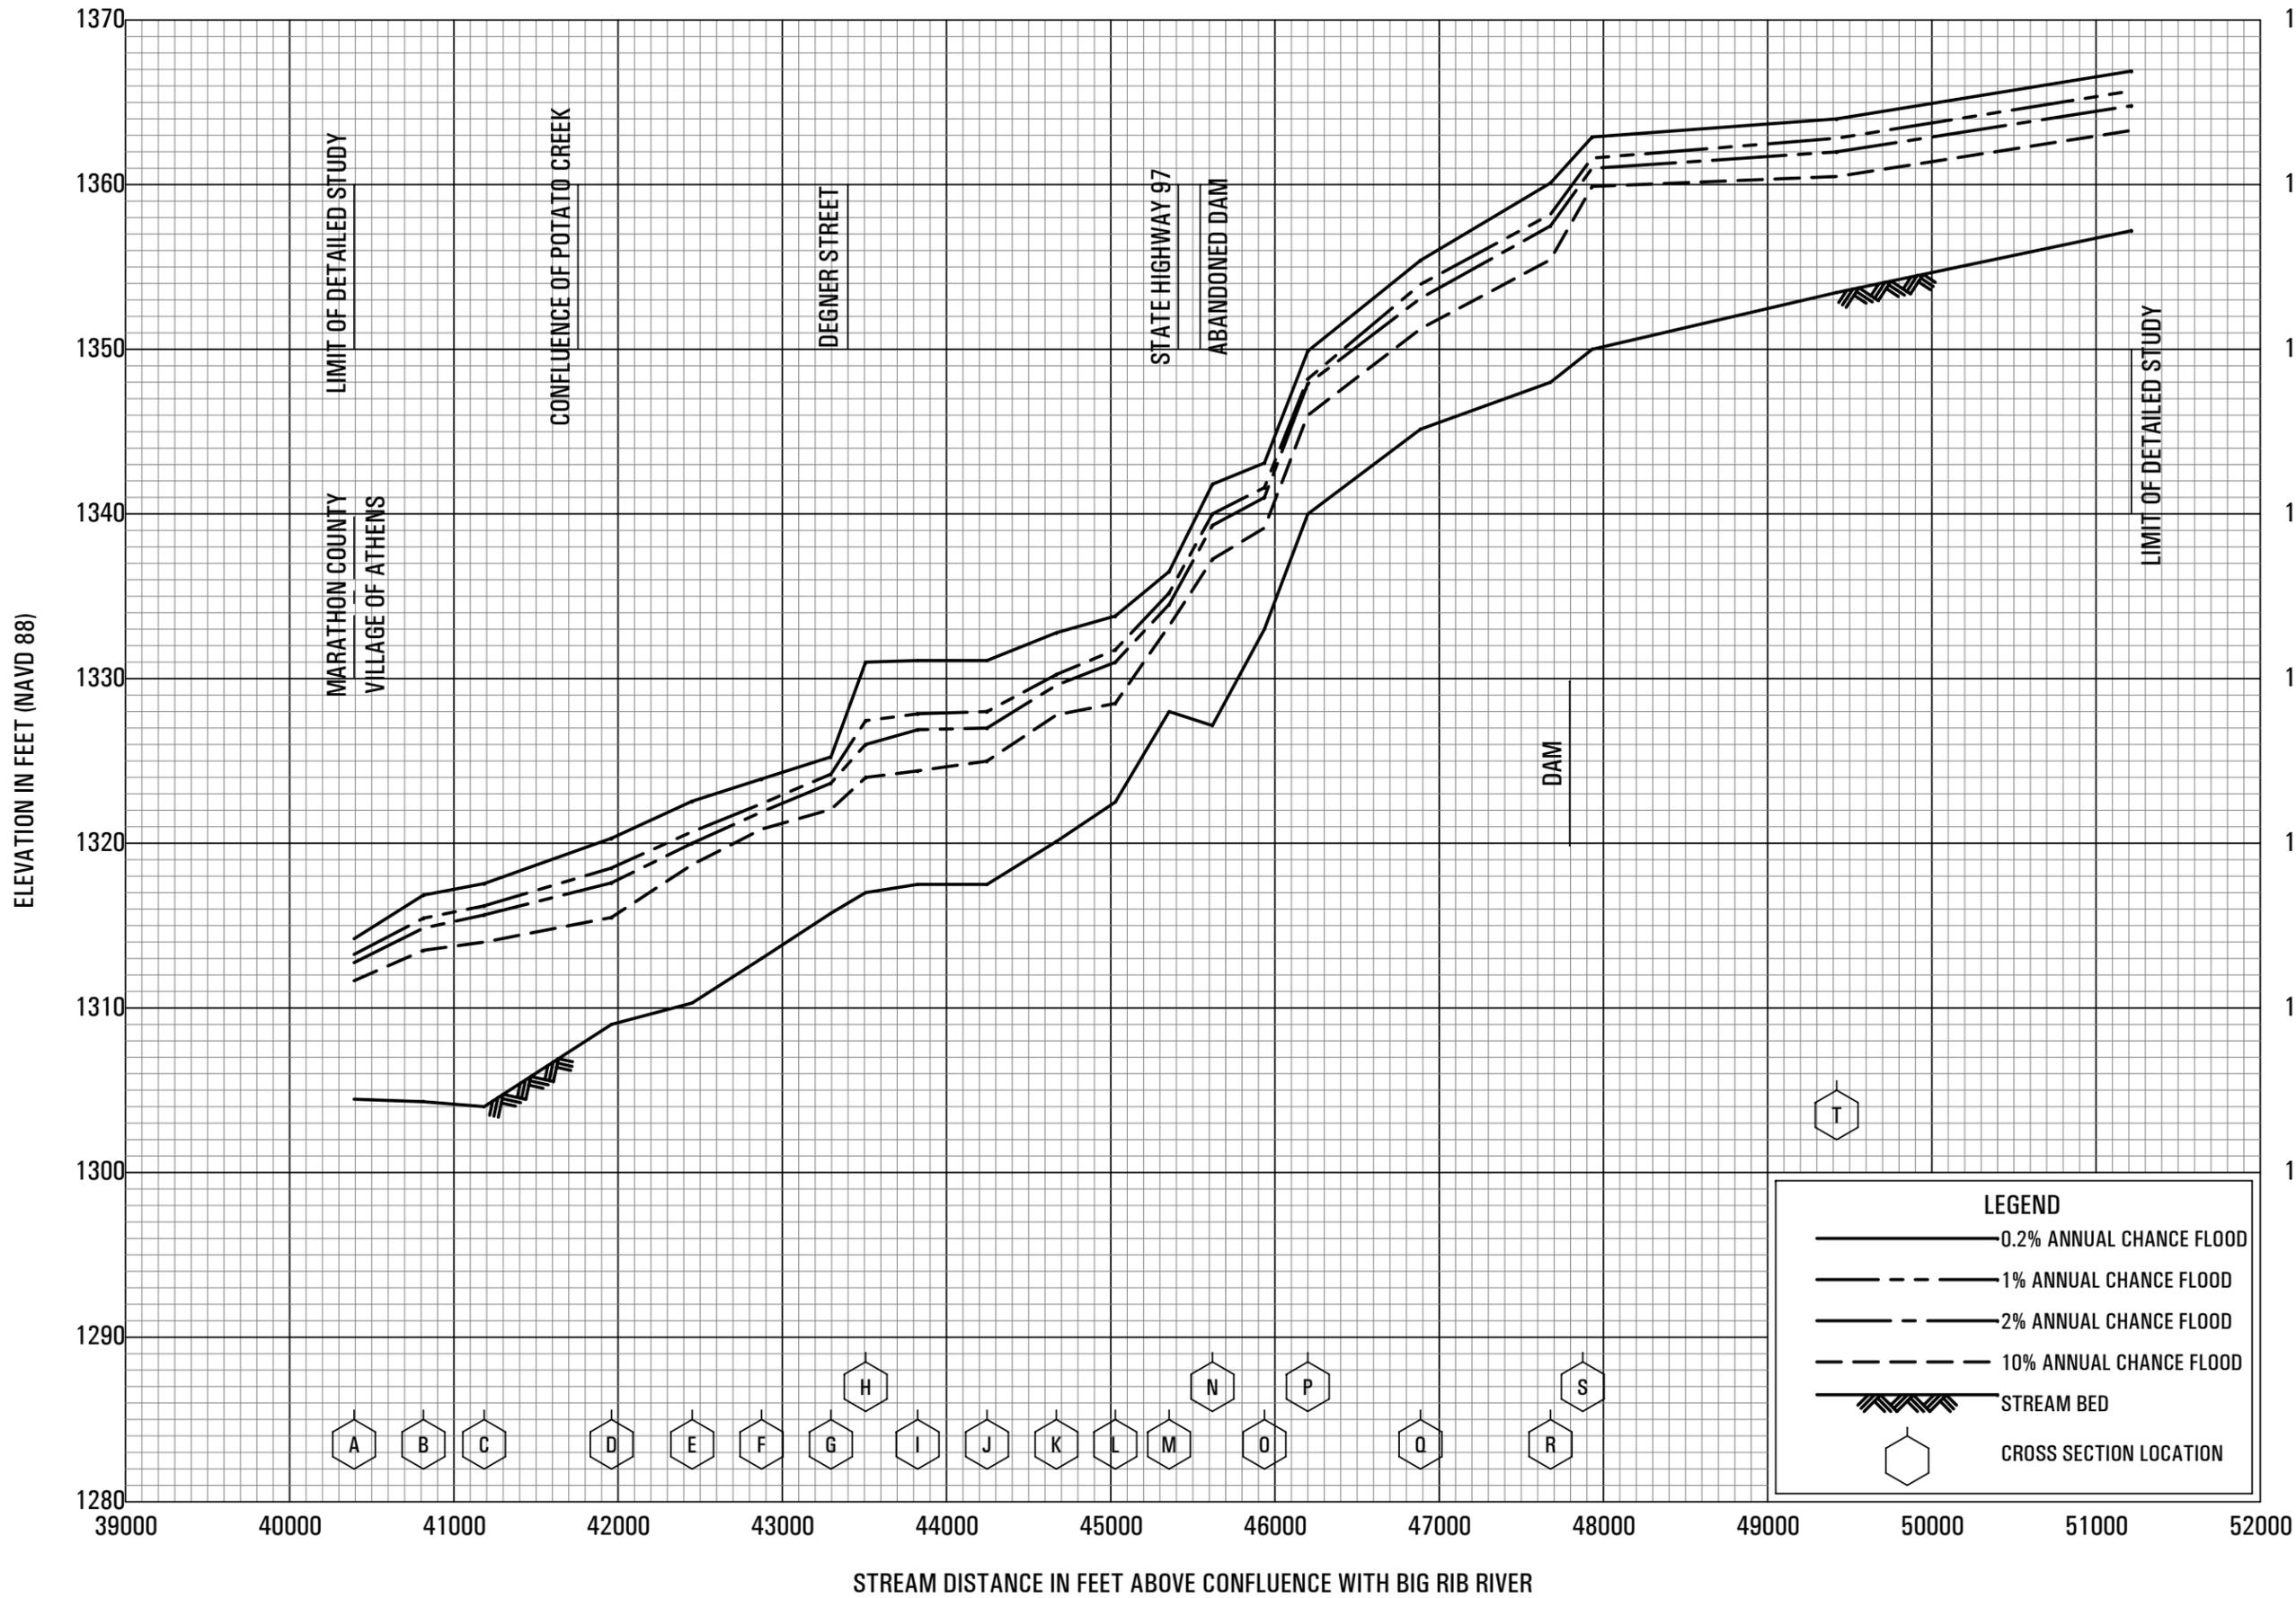


FLOOD PROFILES

BLACK CREEK


FEDERAL EMERGENCY MANAGEMENT AGENCY

**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

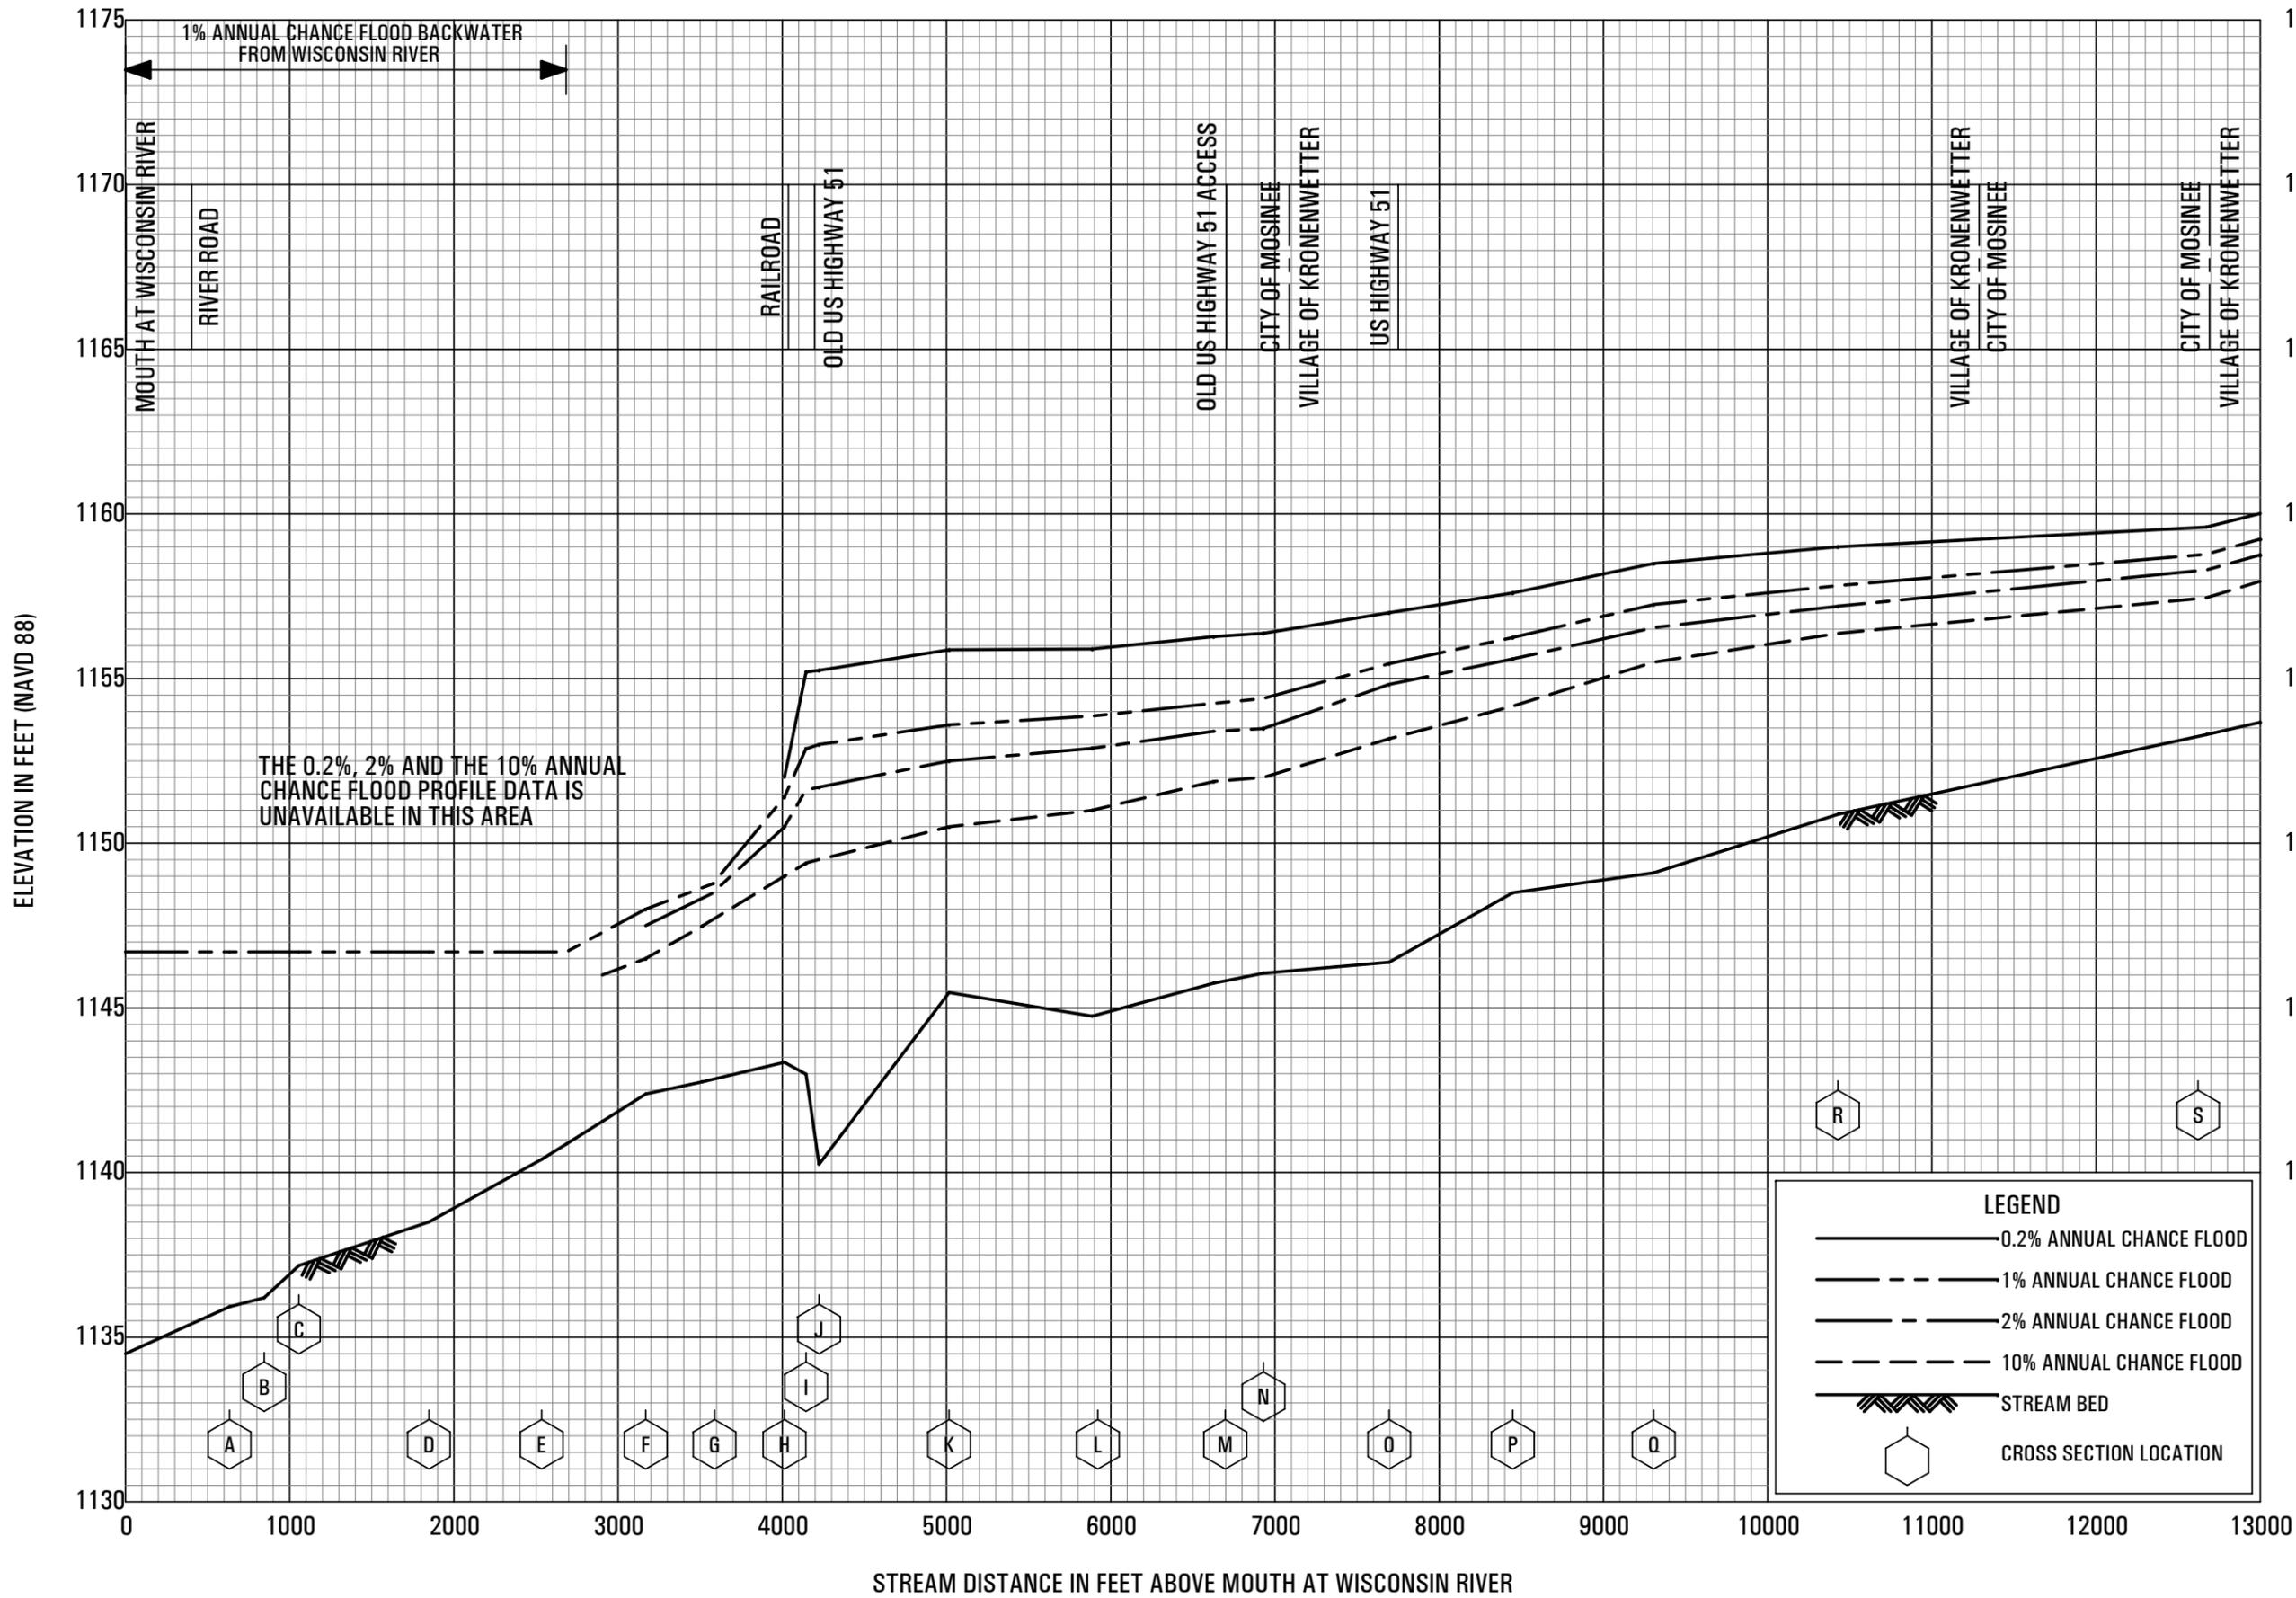

FLOOD PROFILES
BULL JUNIOR CREEK


FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
 AND INCORPORATED AREAS

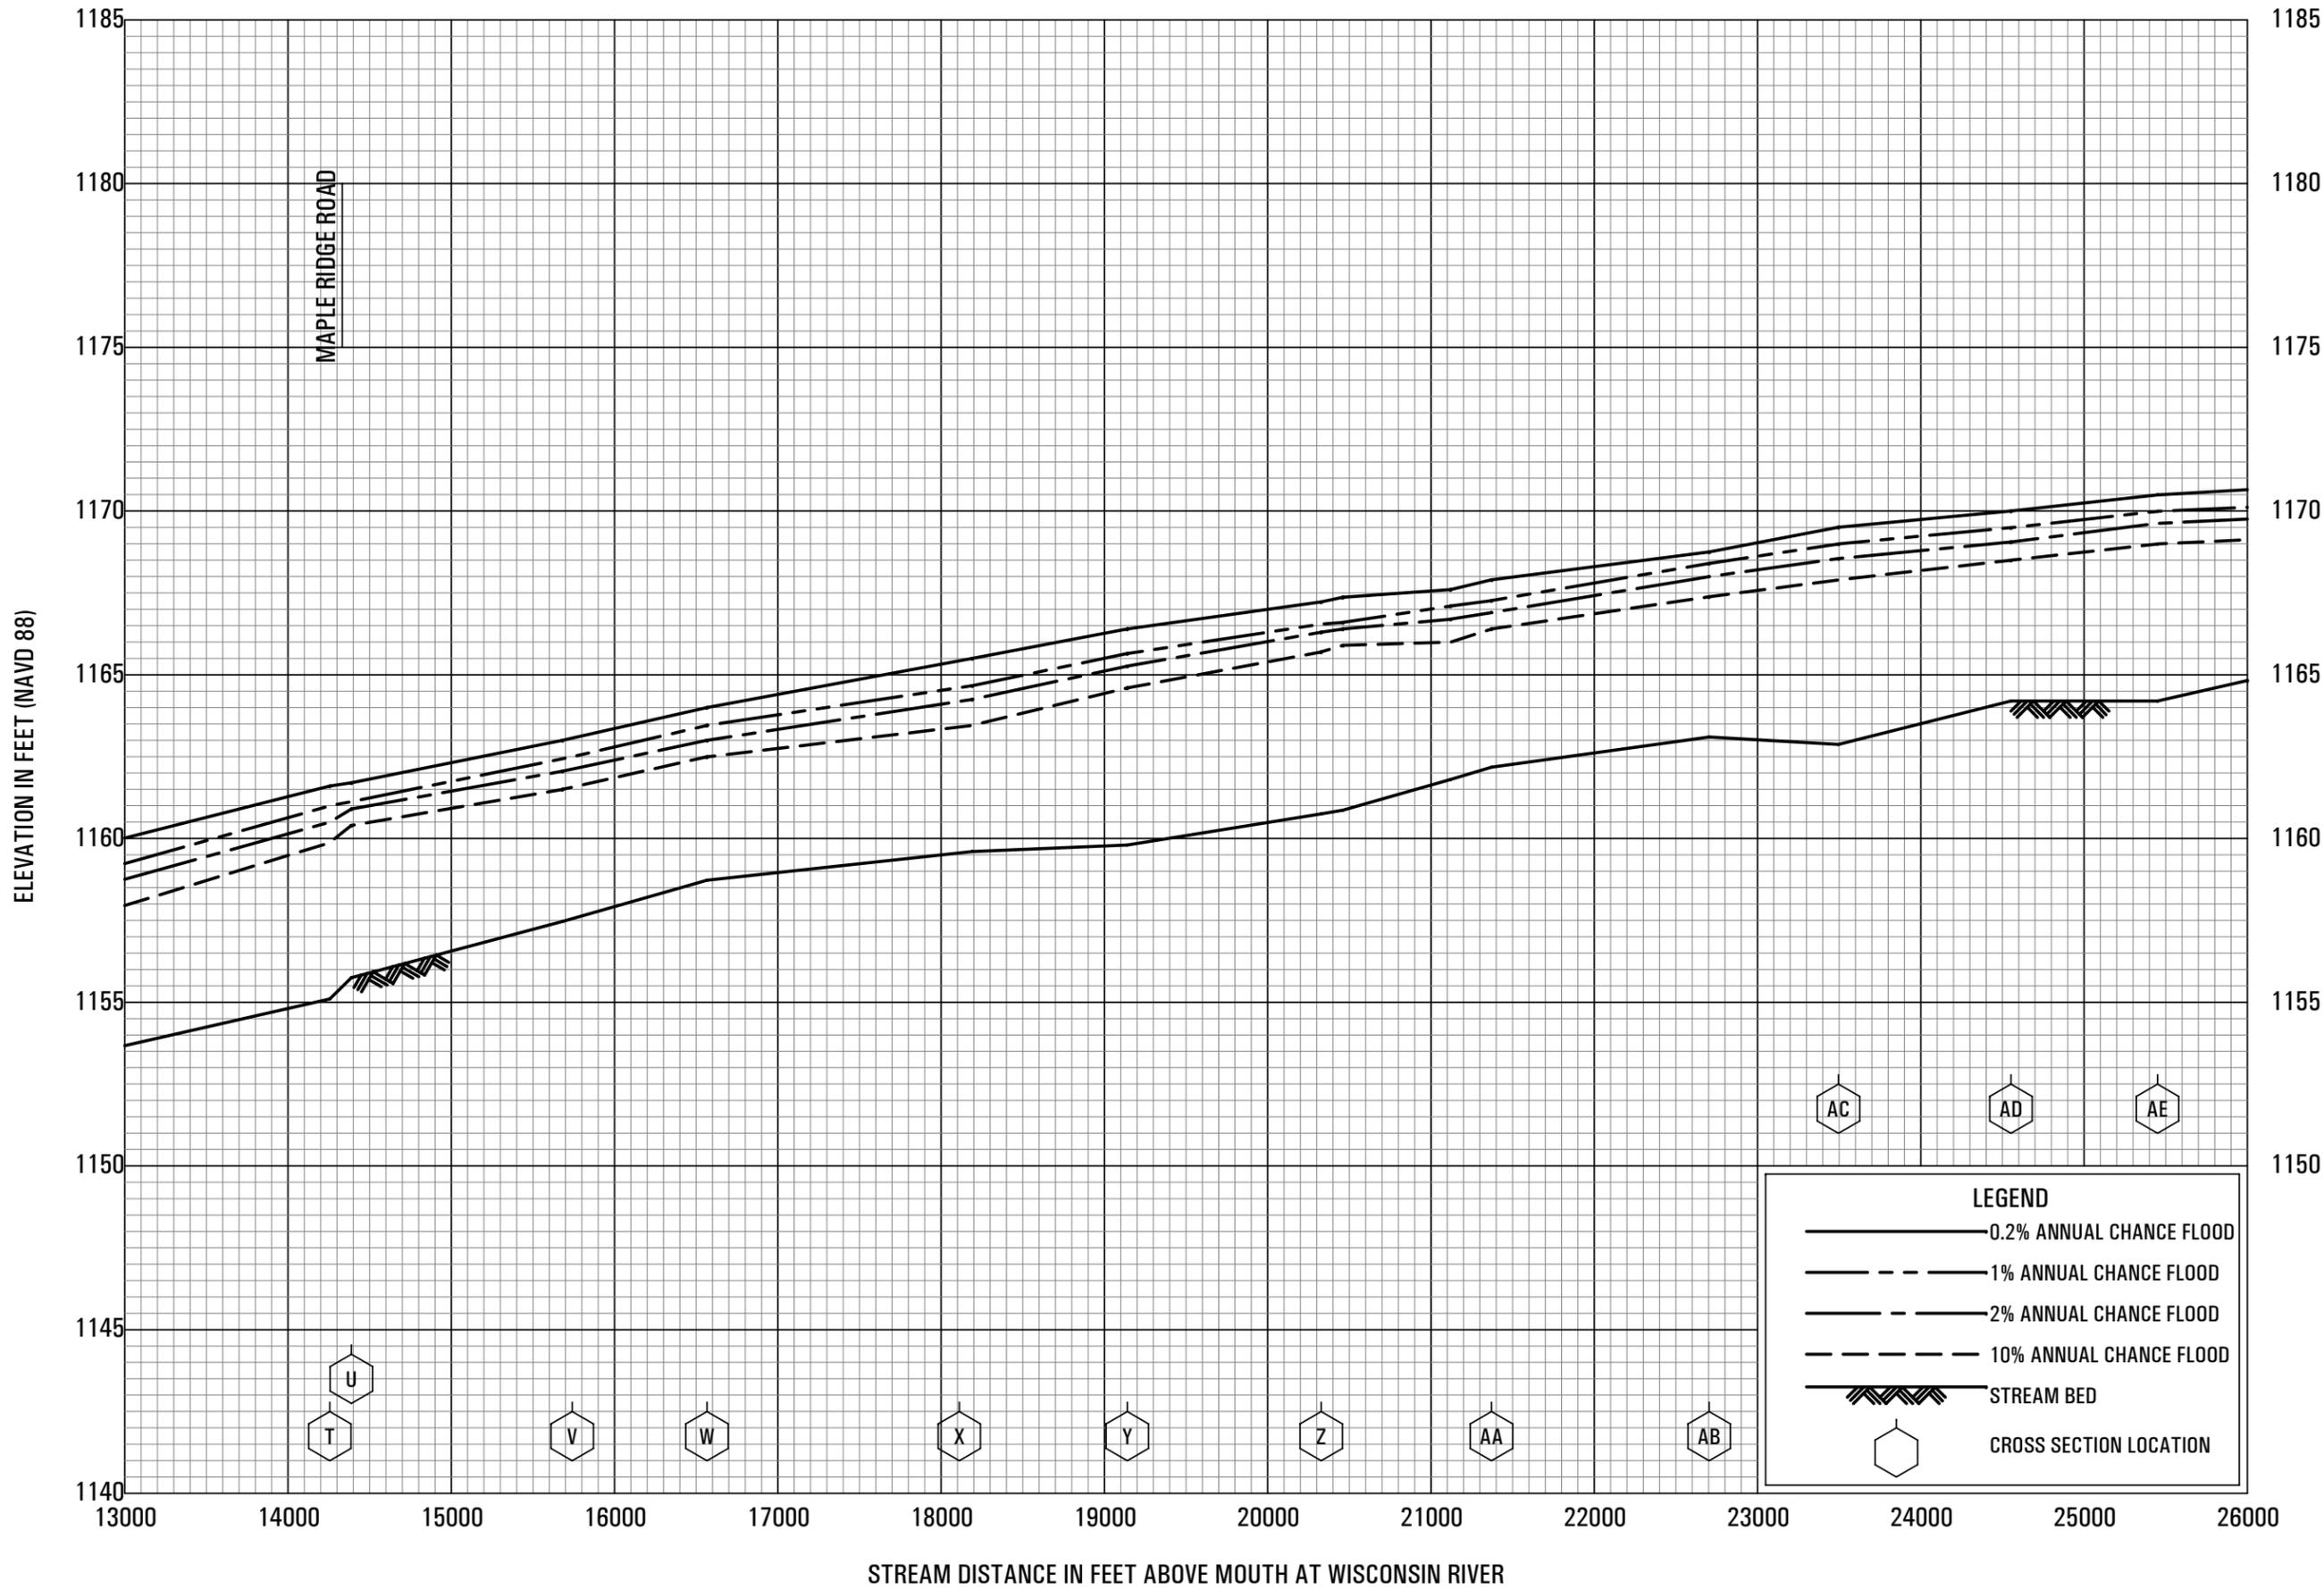

FLOOD PROFILES

BULL JUNIOR CREEK

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
 AND INCORPORATED AREAS

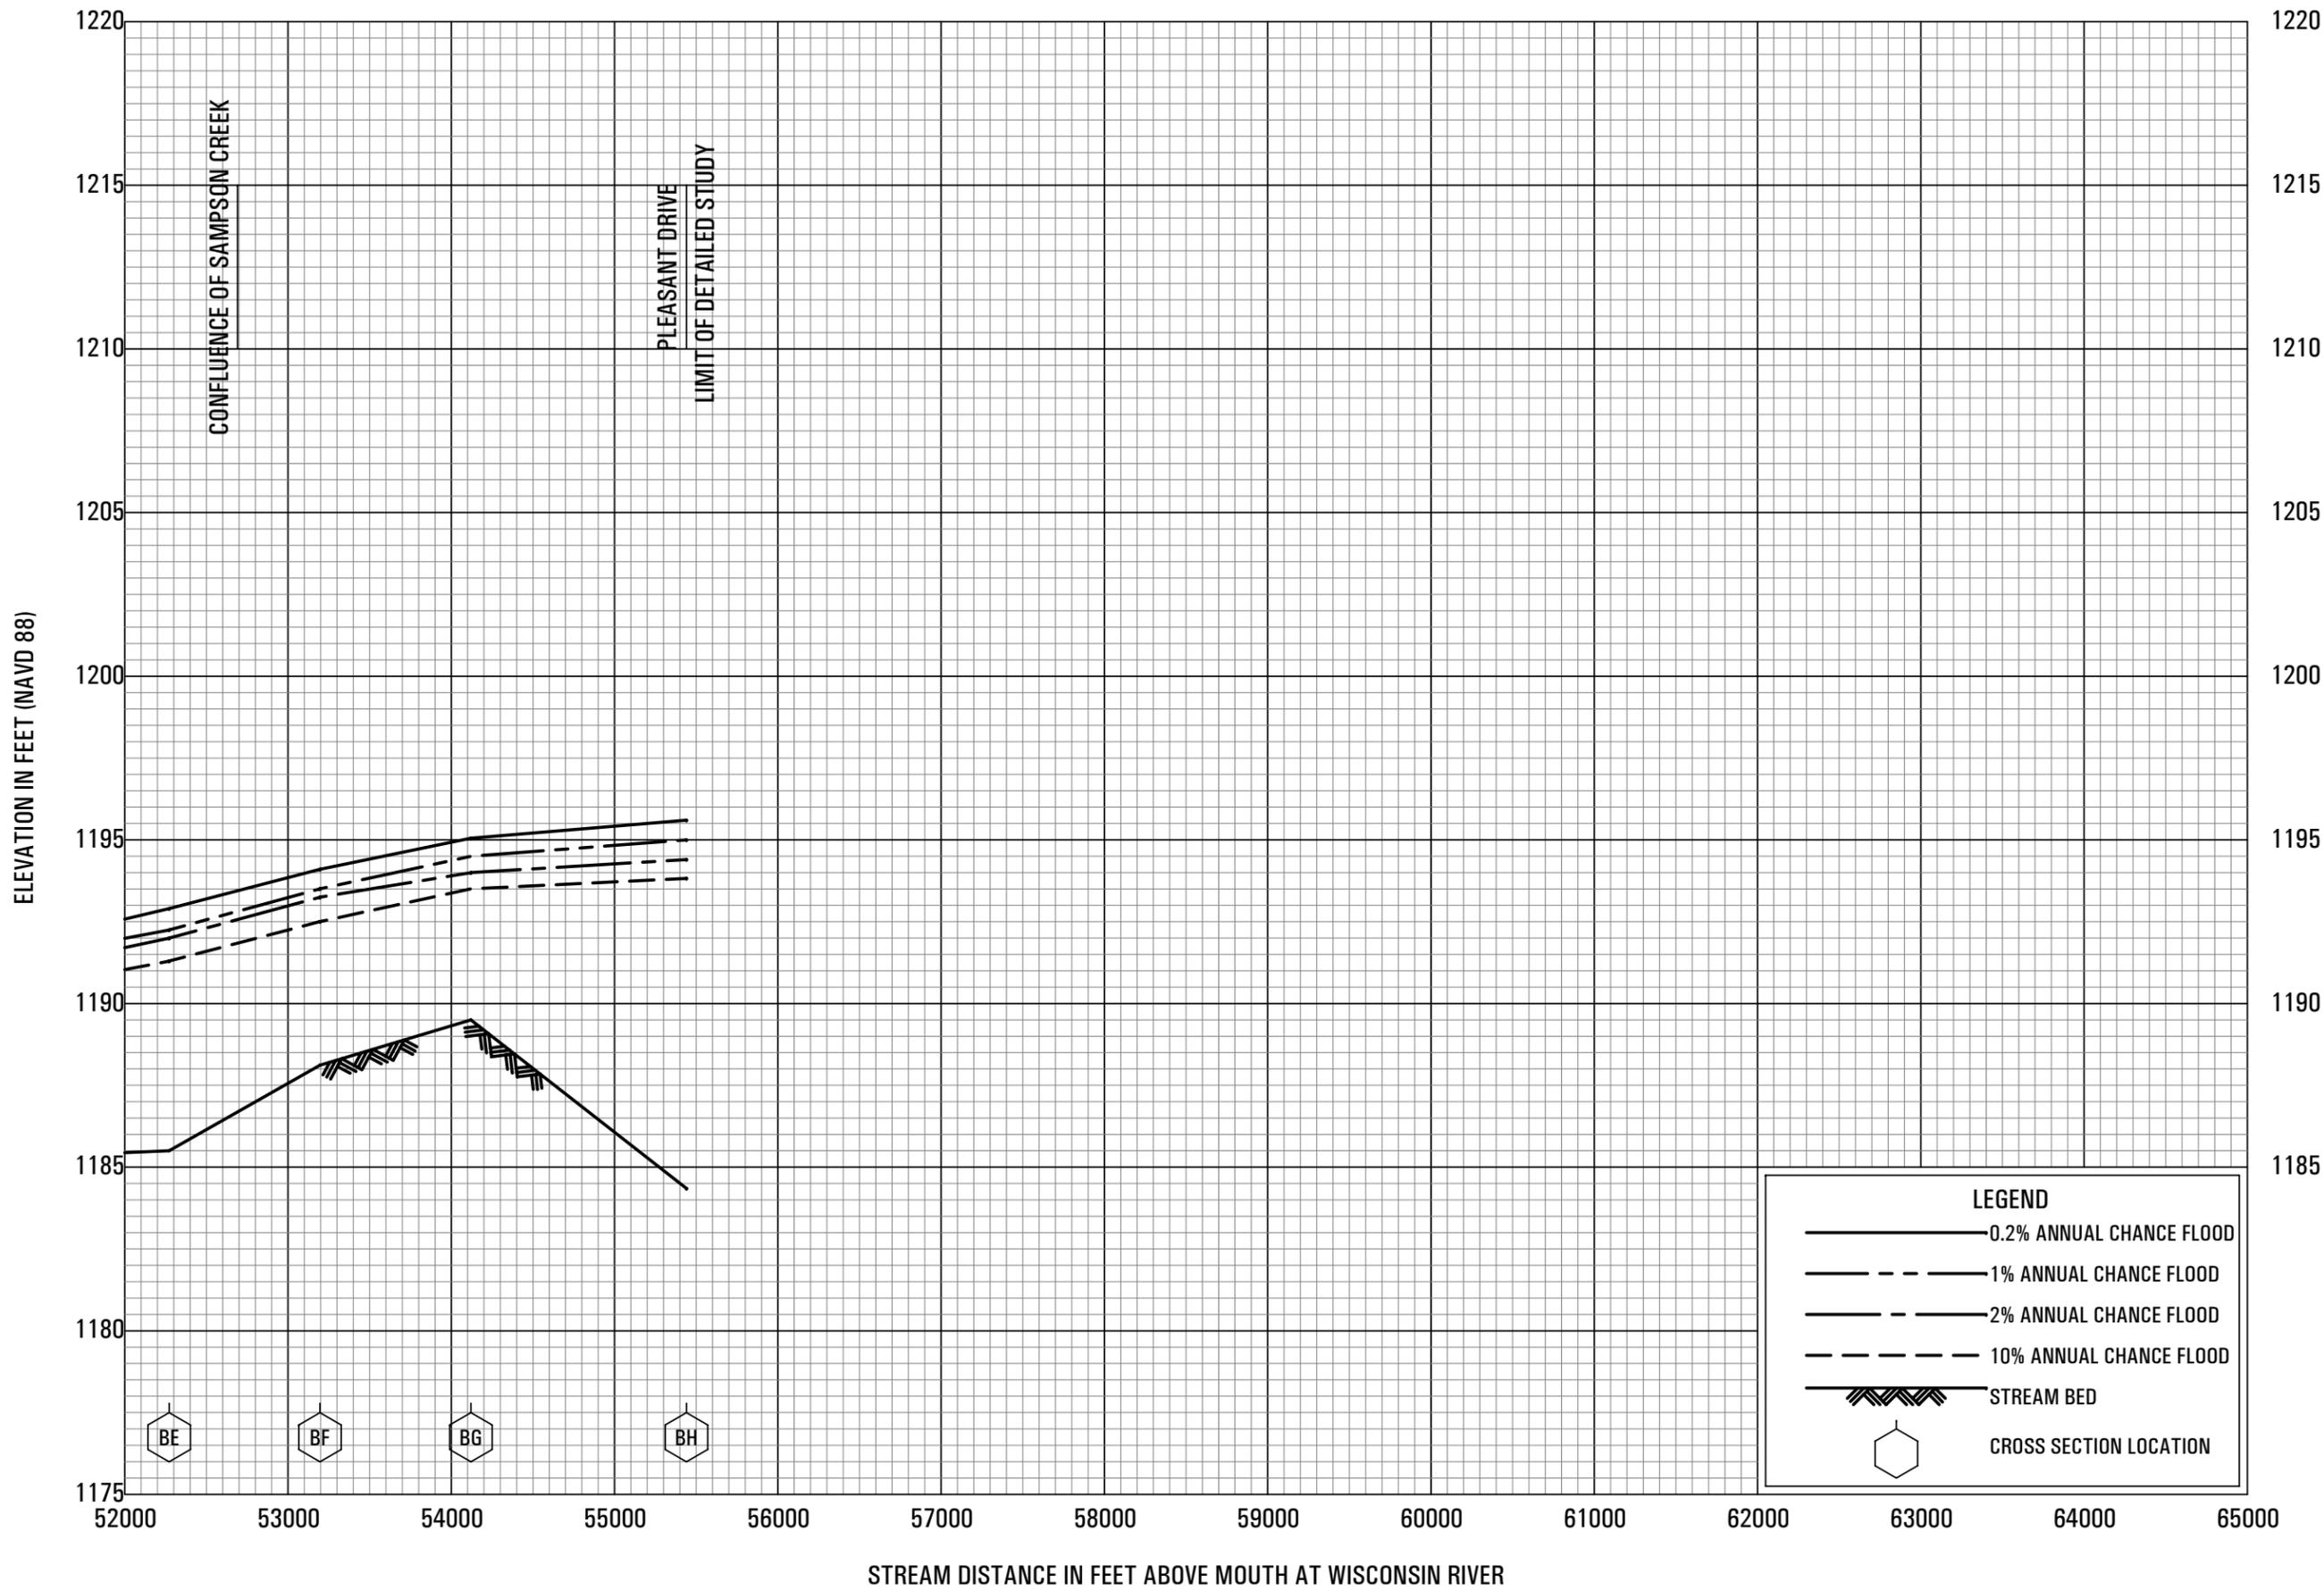


FLOOD PROFILES

BULL JUNIOR CREEK

FEDERAL EMERGENCY MANAGEMENT AGENCY

MARATHON COUNTY, WI

AND INCORPORATED AREAS

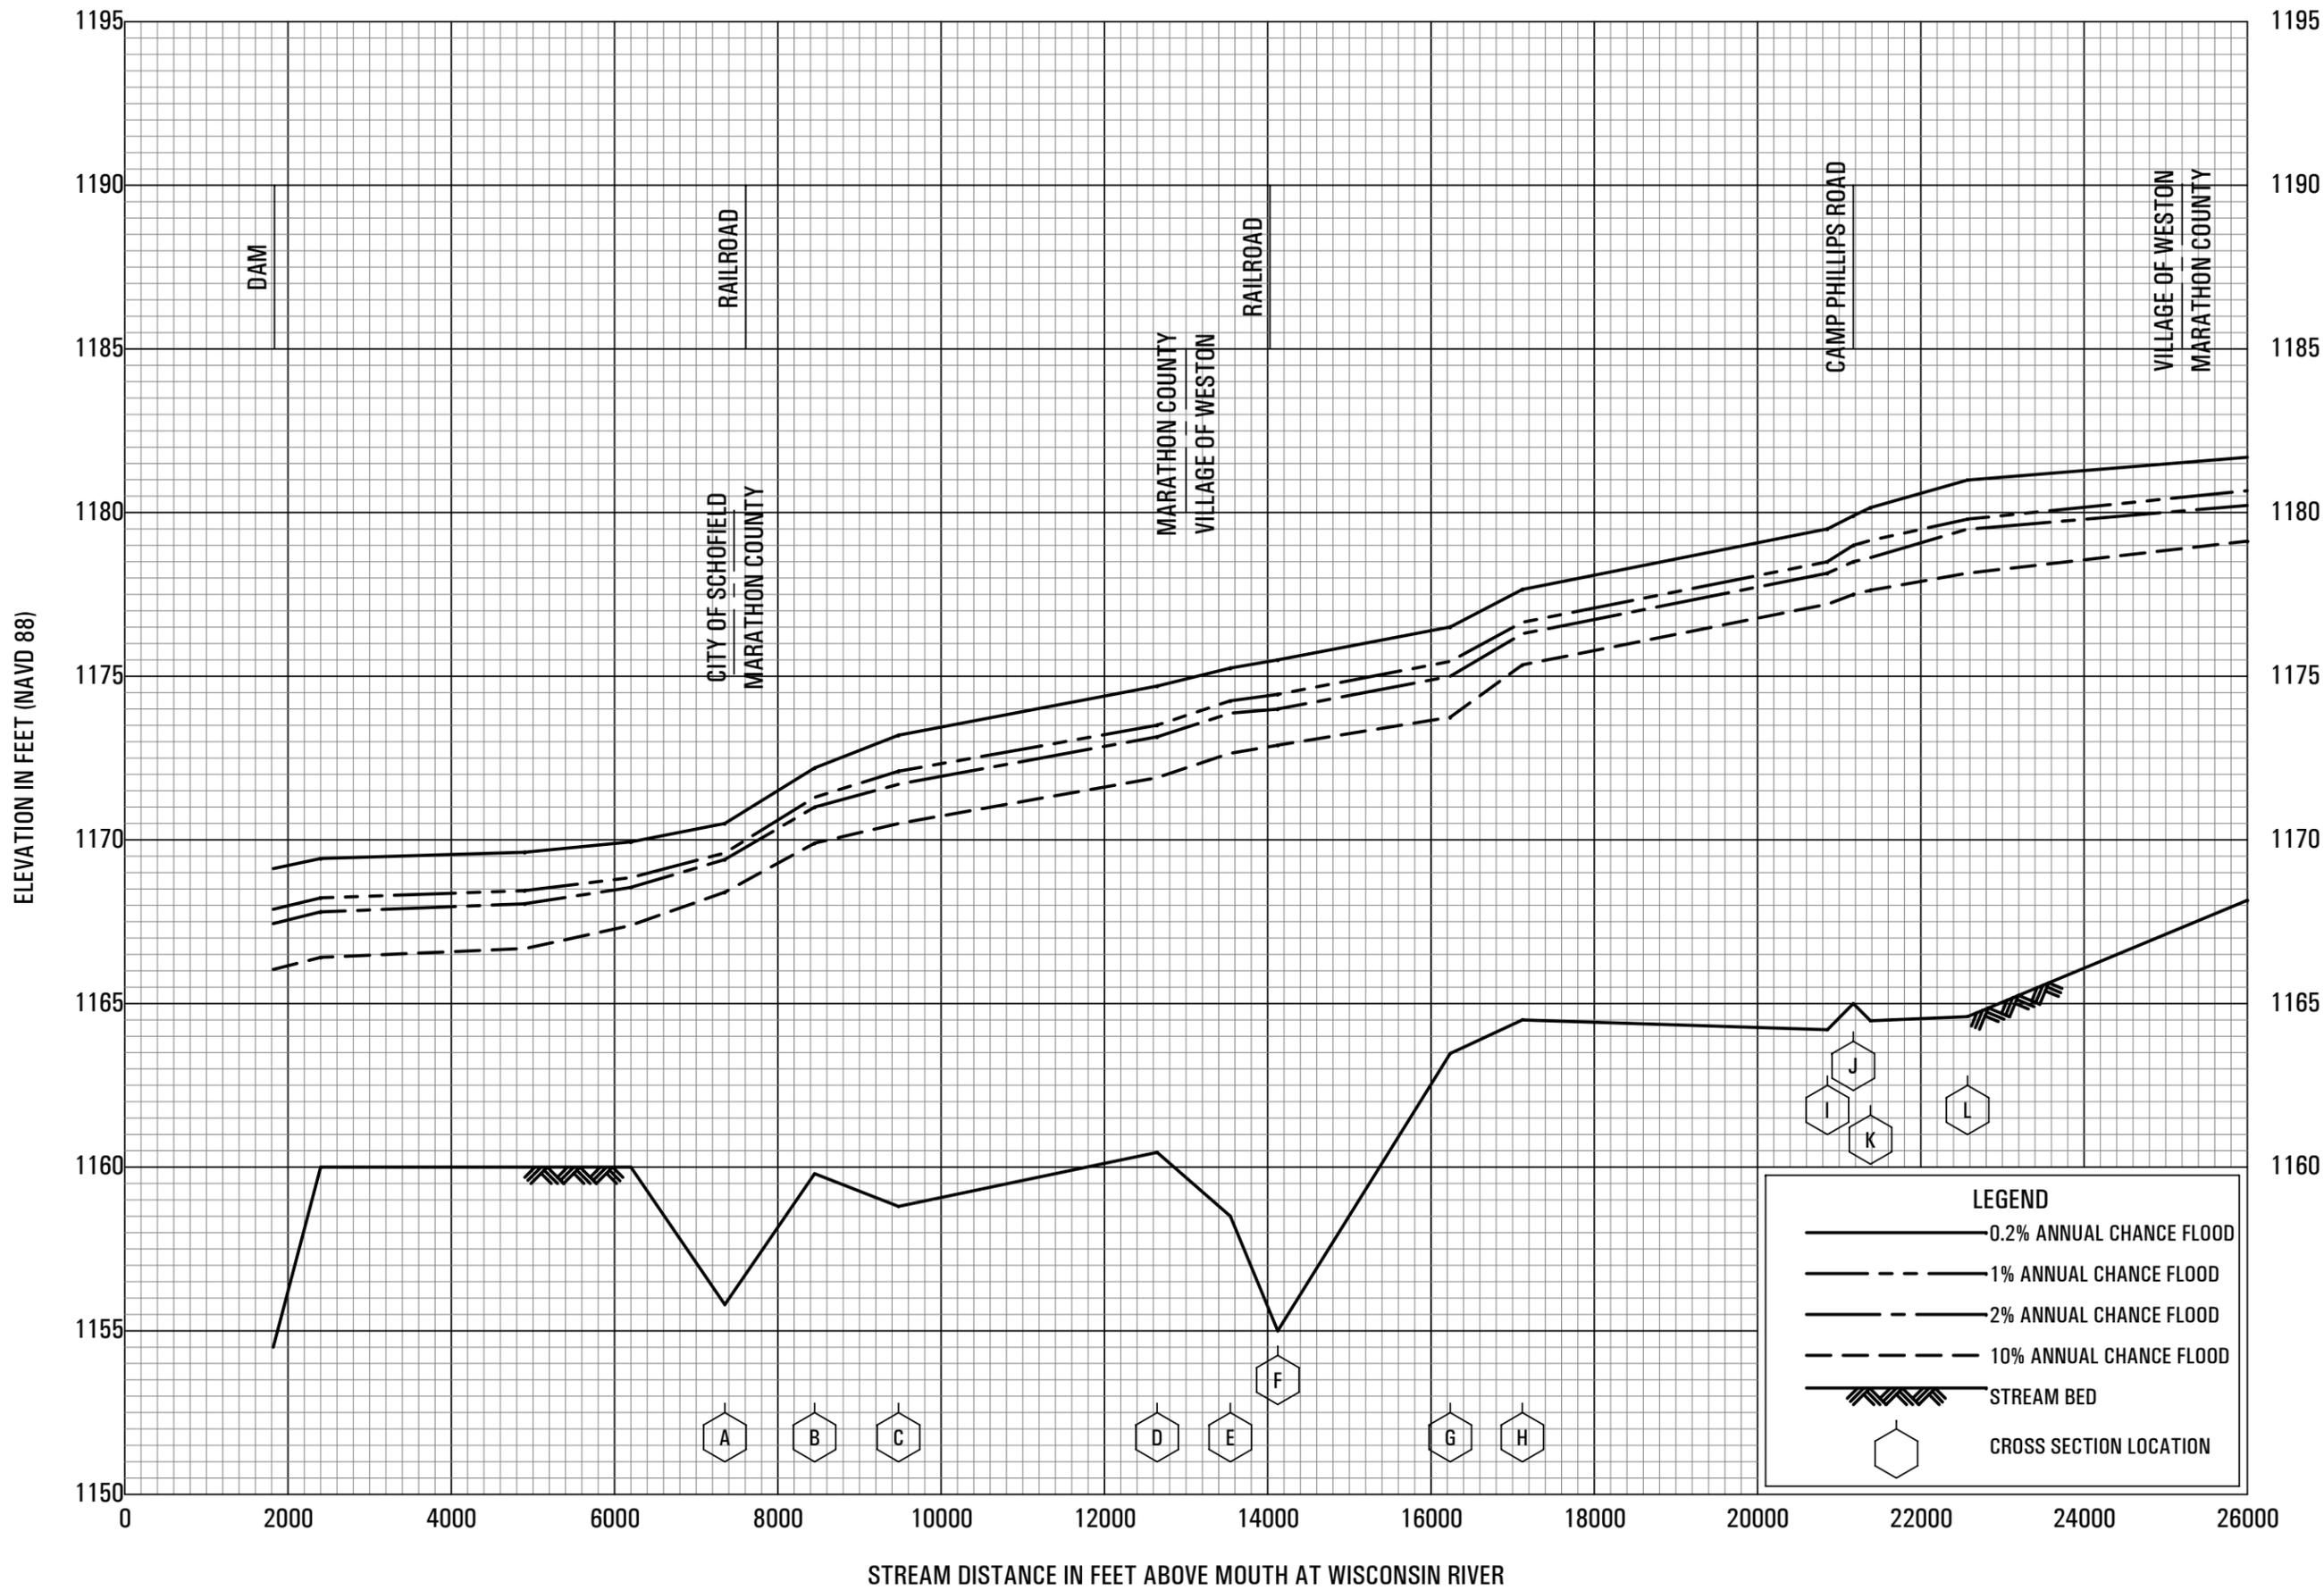


FLOOD PROFILES

EAU CLAIRE RIVER

FEDERAL EMERGENCY MANAGEMENT AGENCY

**MARATHON COUNTY, WI
AND INCORPORATED AREAS**

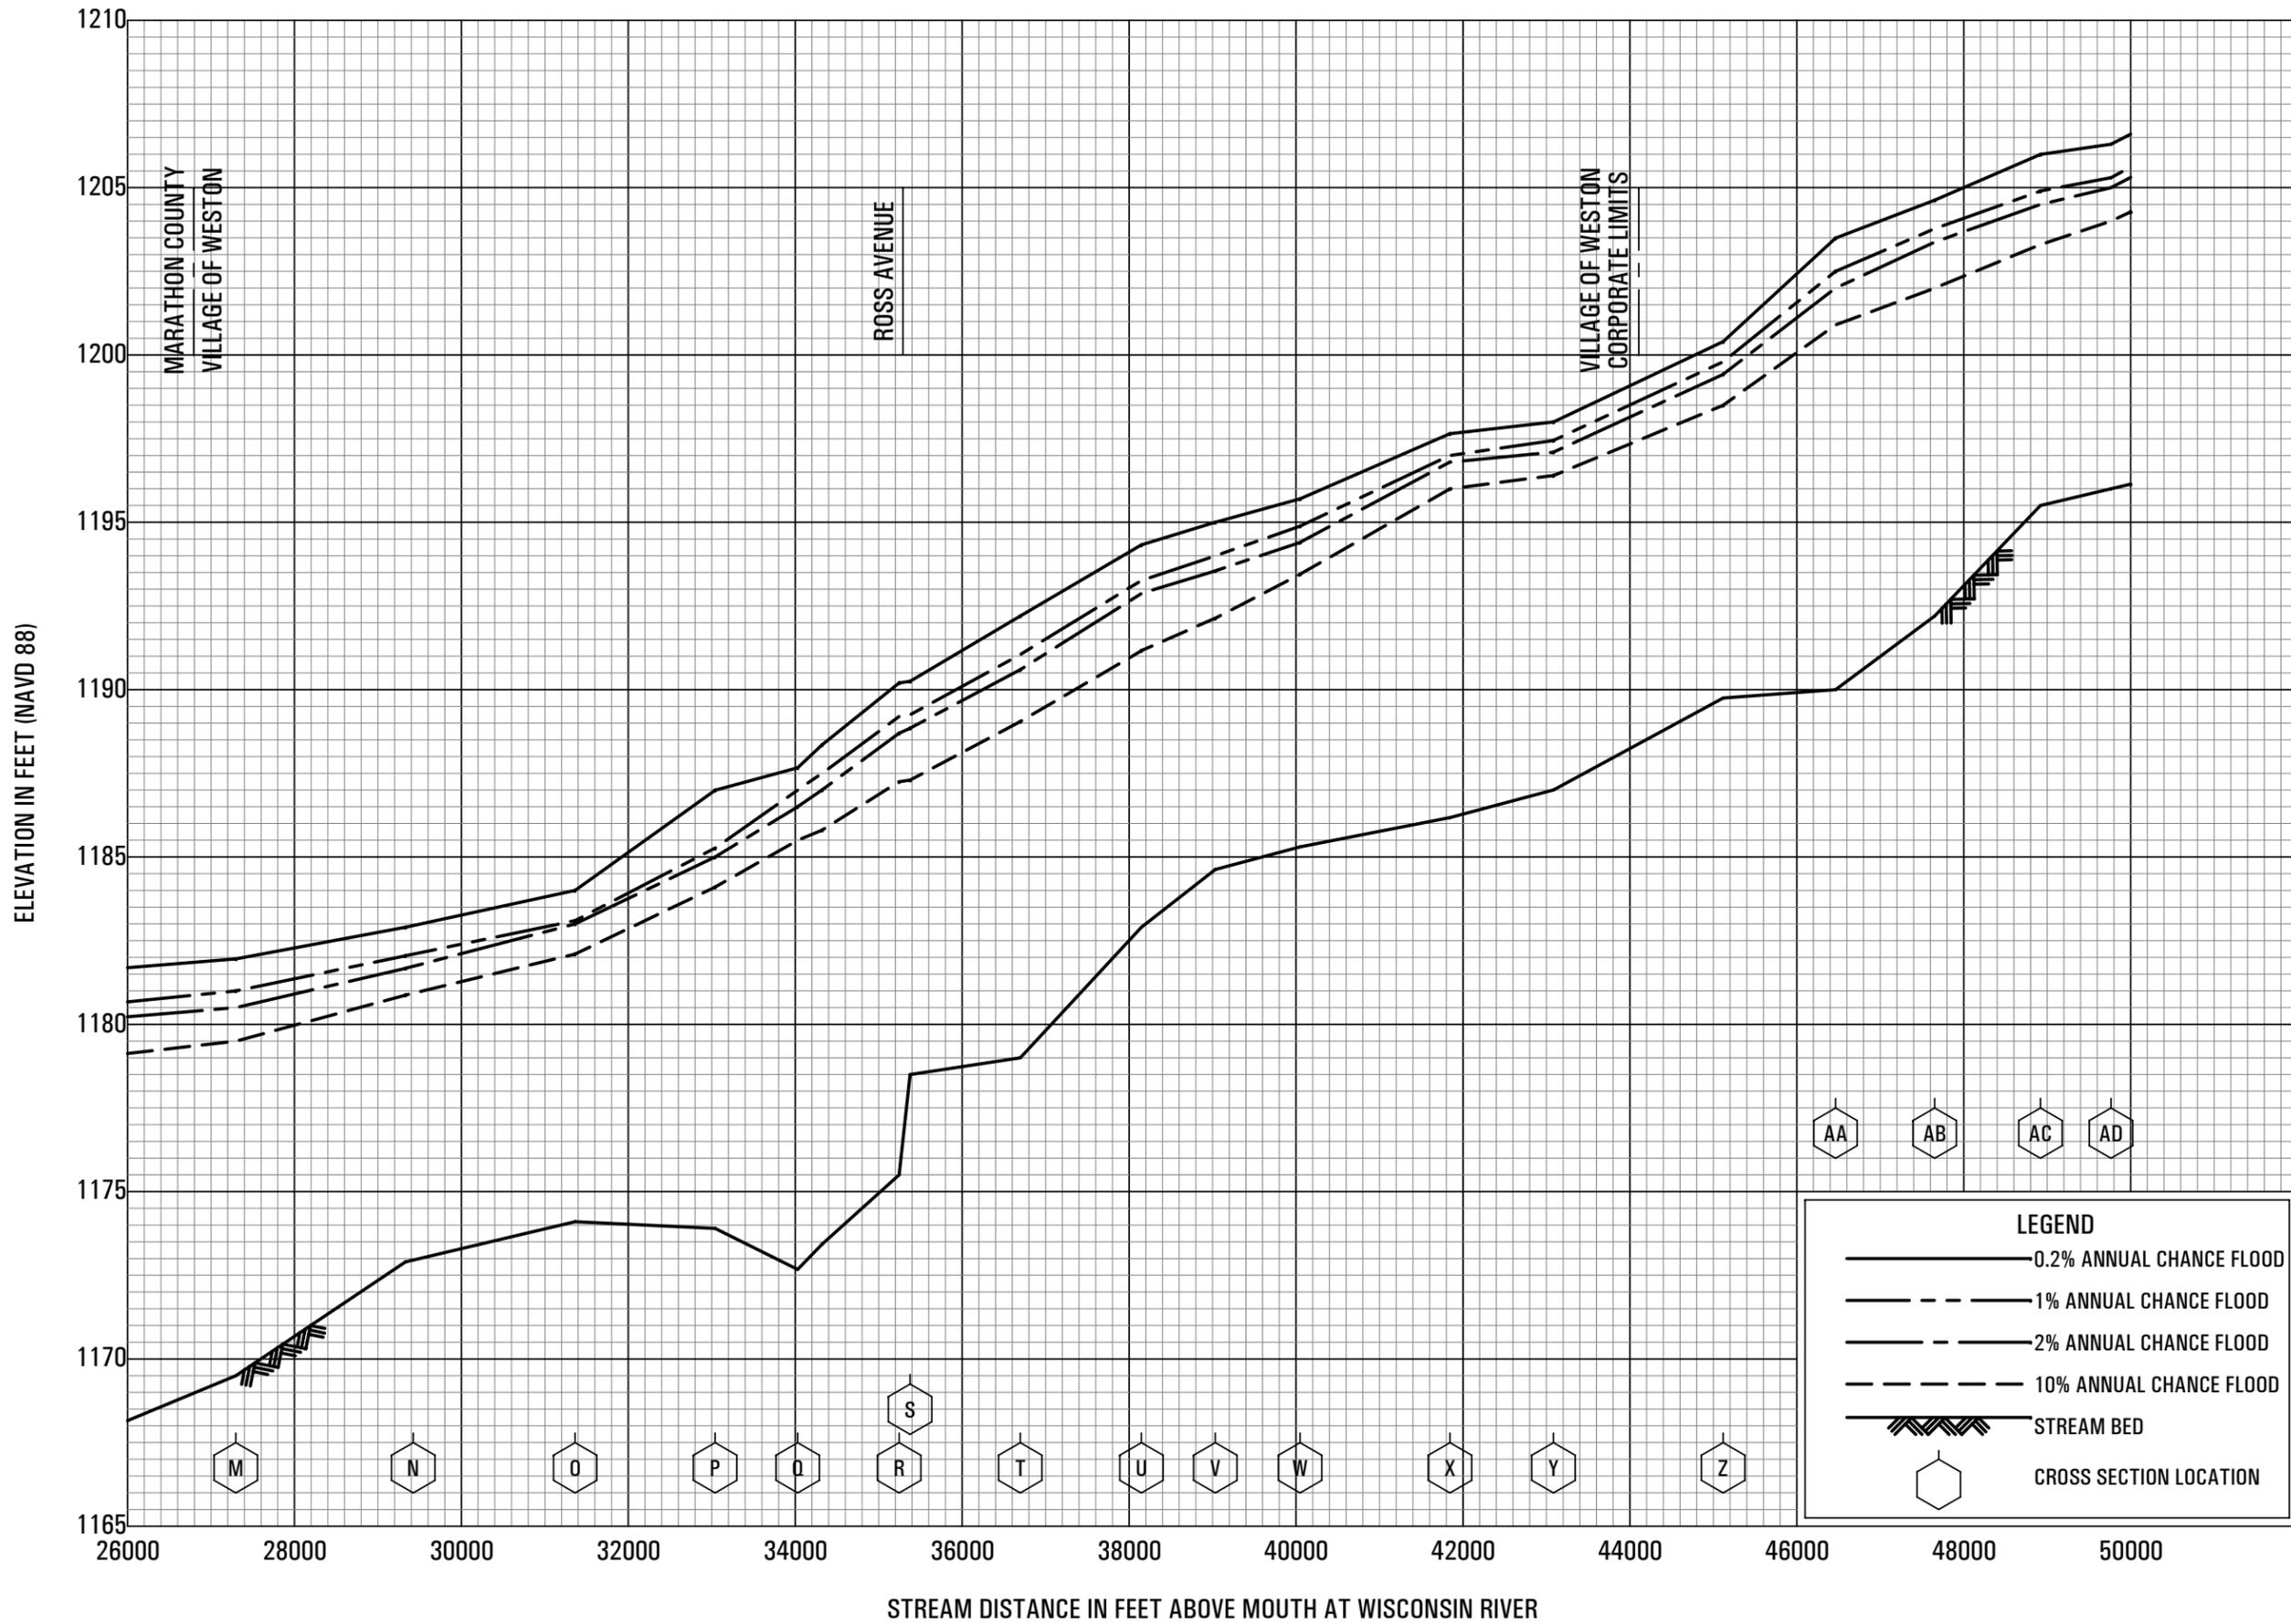



FLOOD PROFILES

EAU CLAIRE RIVER

FEDERAL EMERGENCY MANAGEMENT AGENCY


MARATHON COUNTY, WI

AND INCORPORATED AREAS

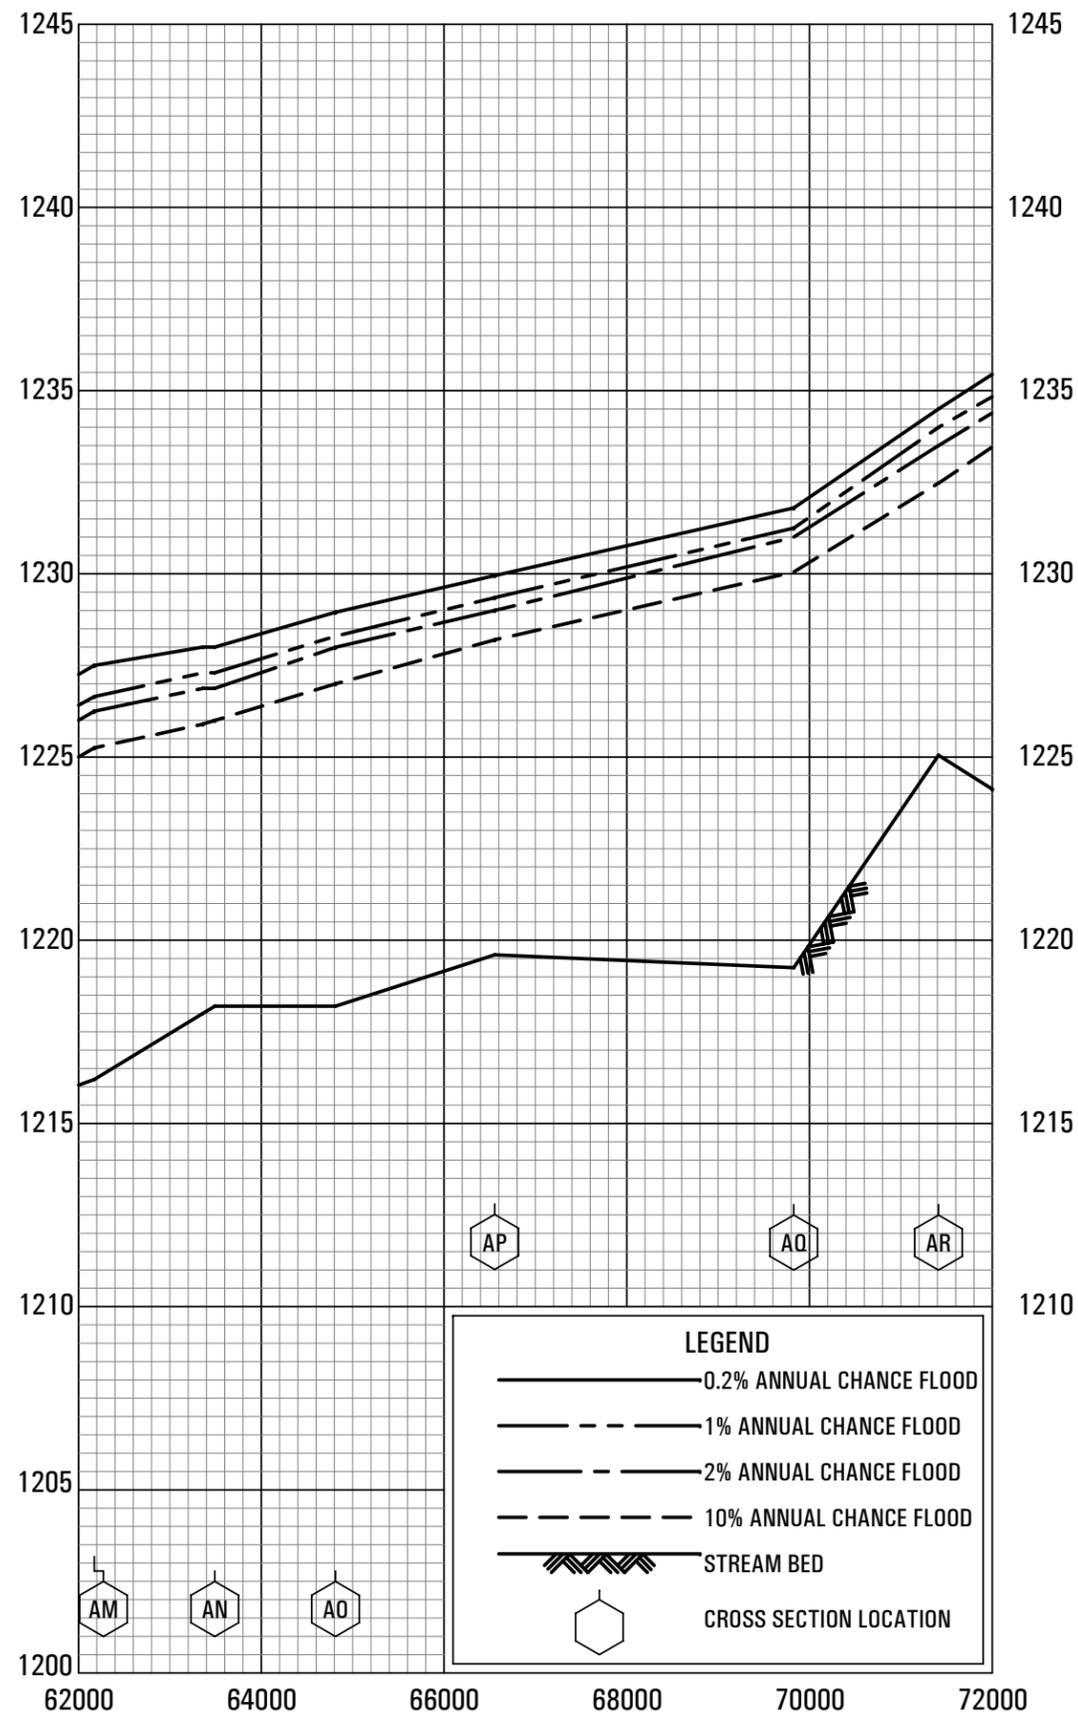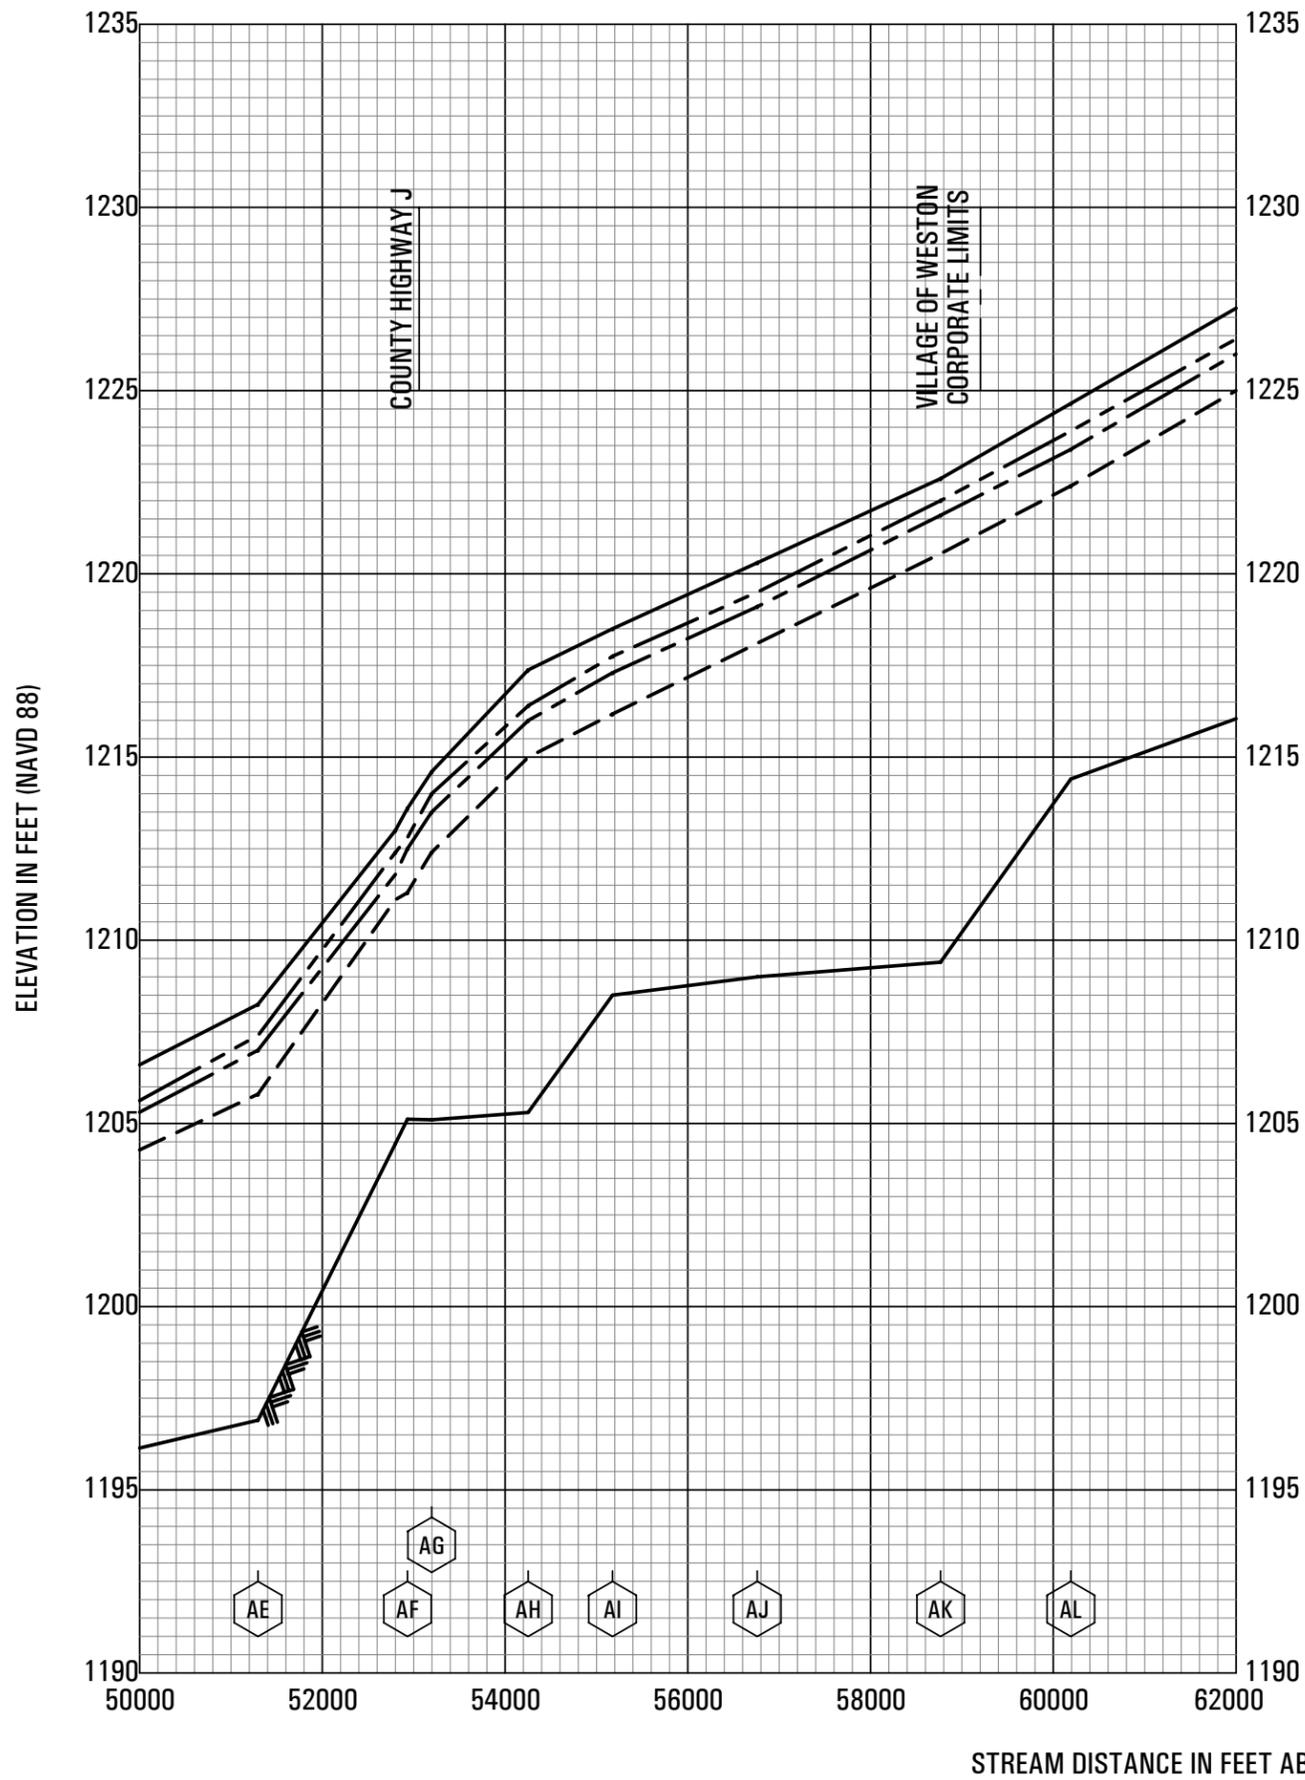

FLOOD PROFILES
EAU CLAIRE RIVER


FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

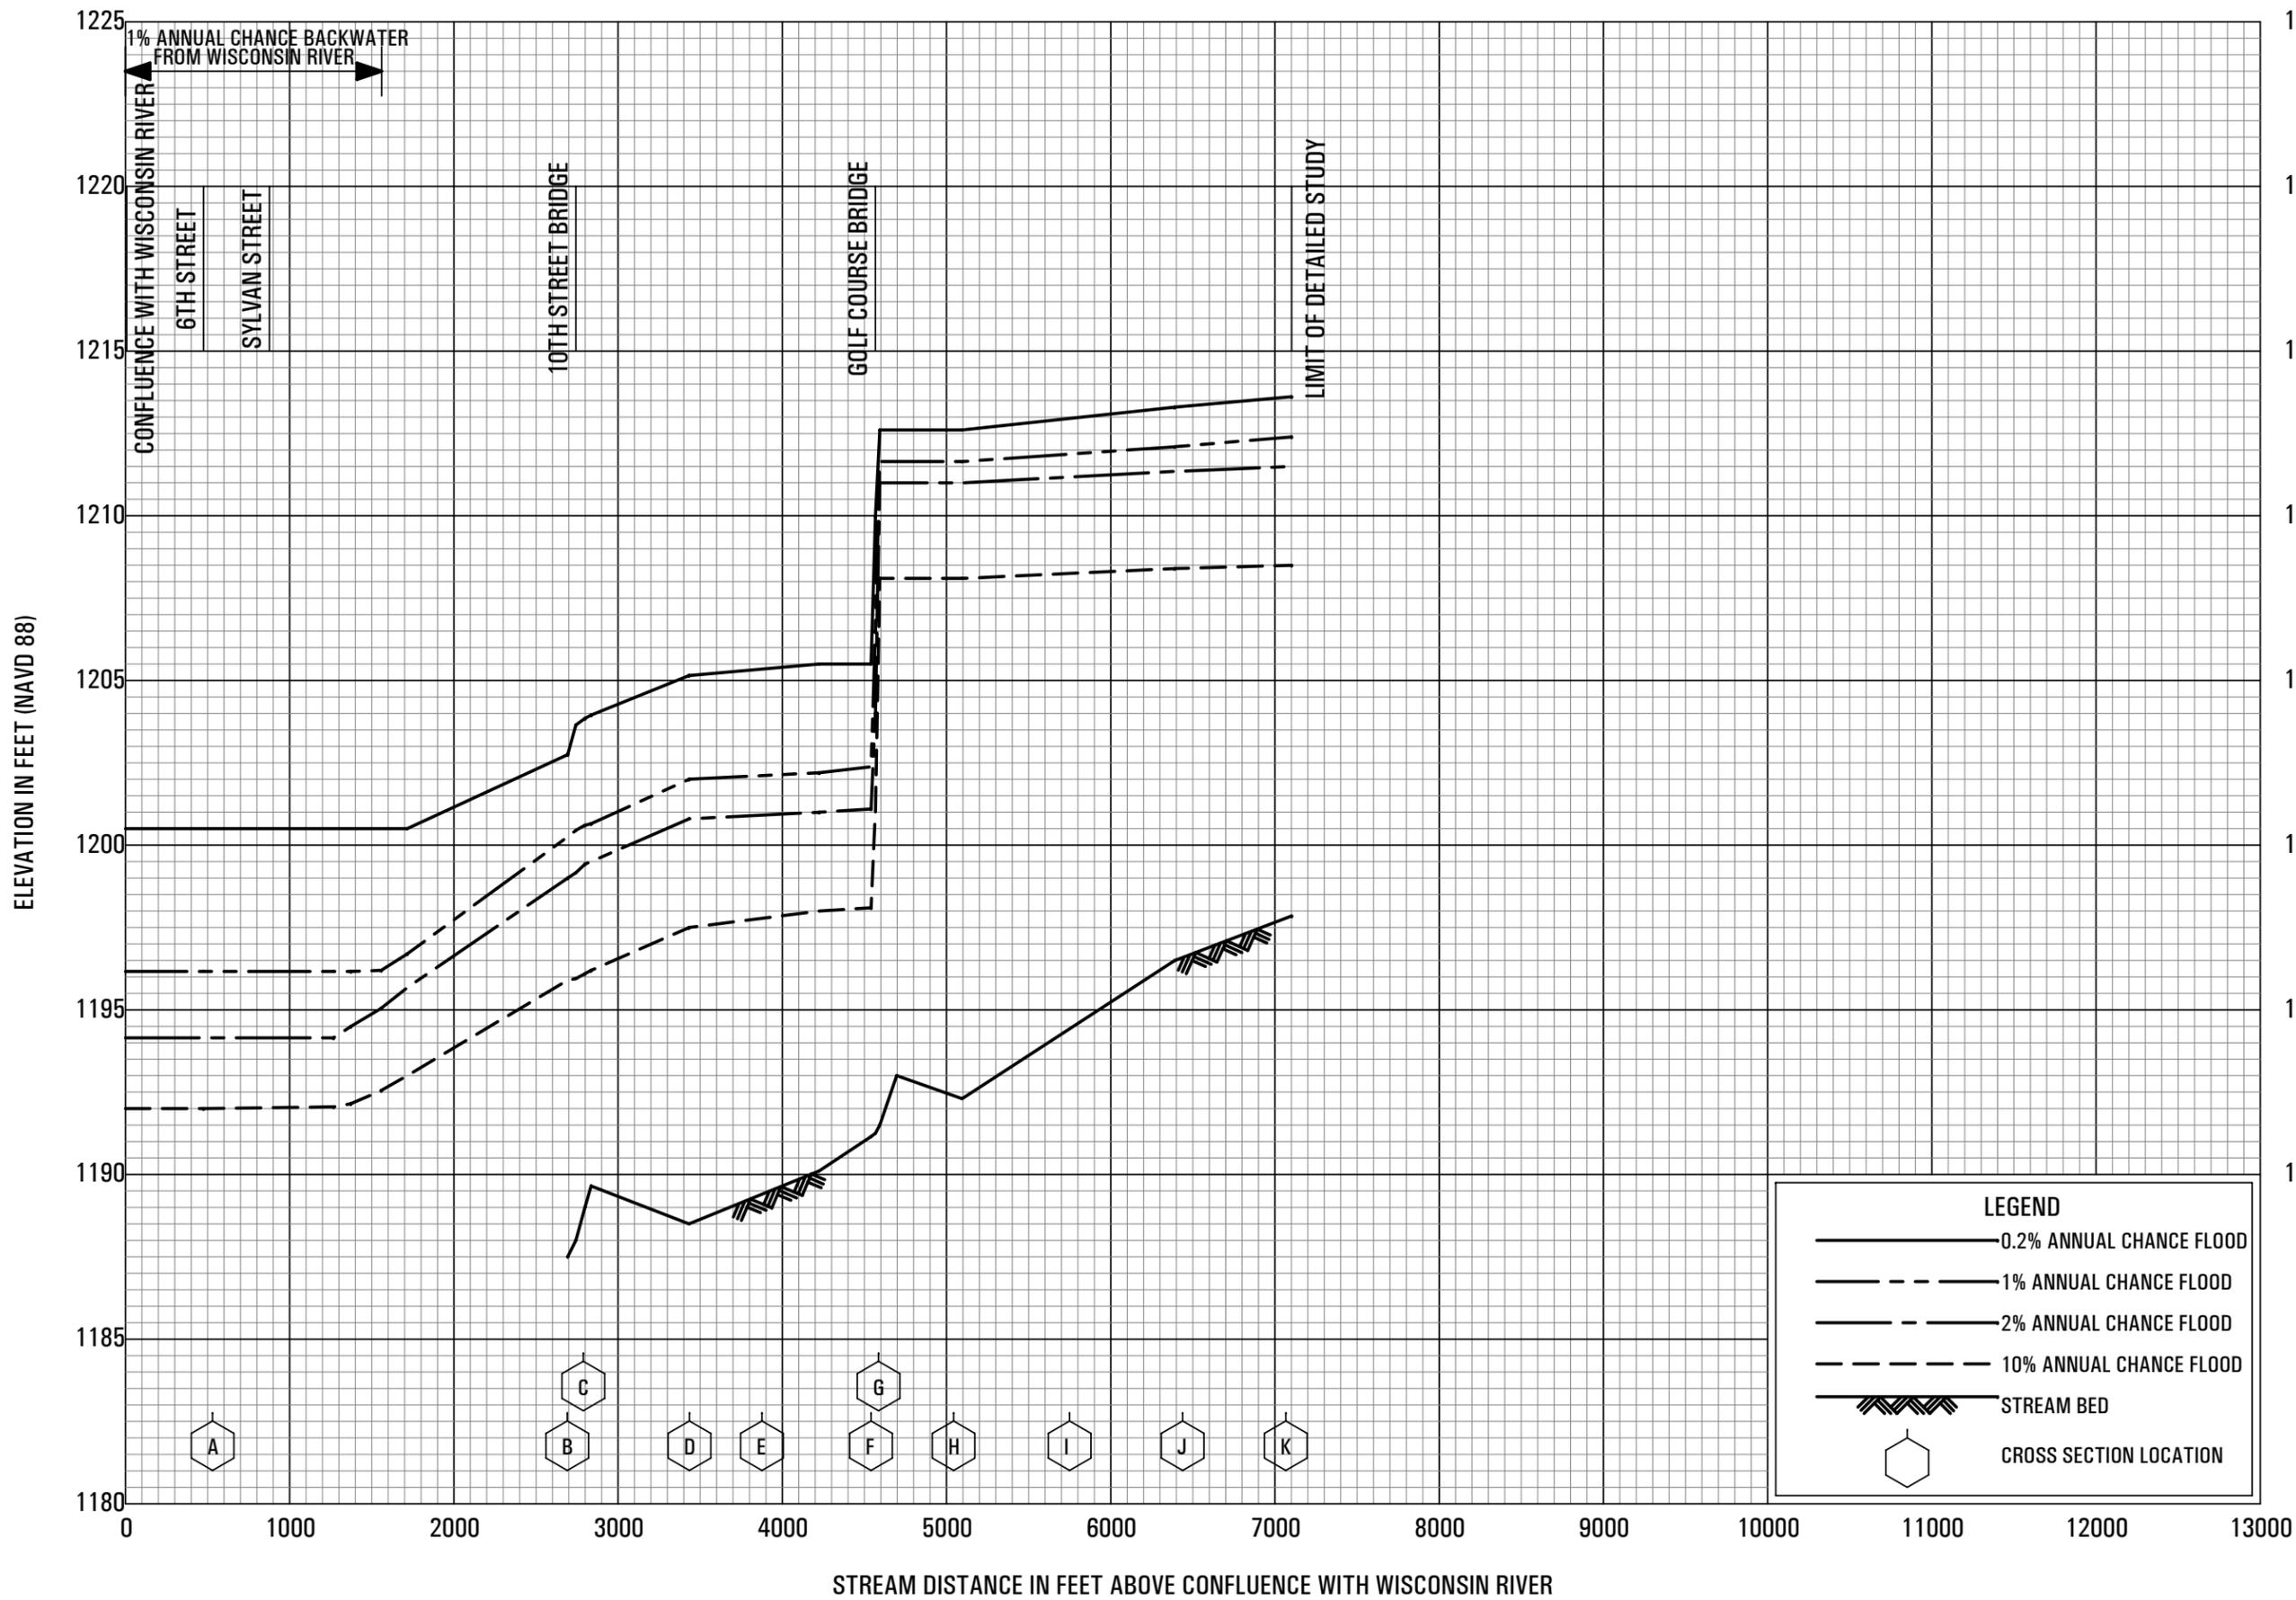

FLOOD PROFILES

JIM MOORE CREEK


**FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS**

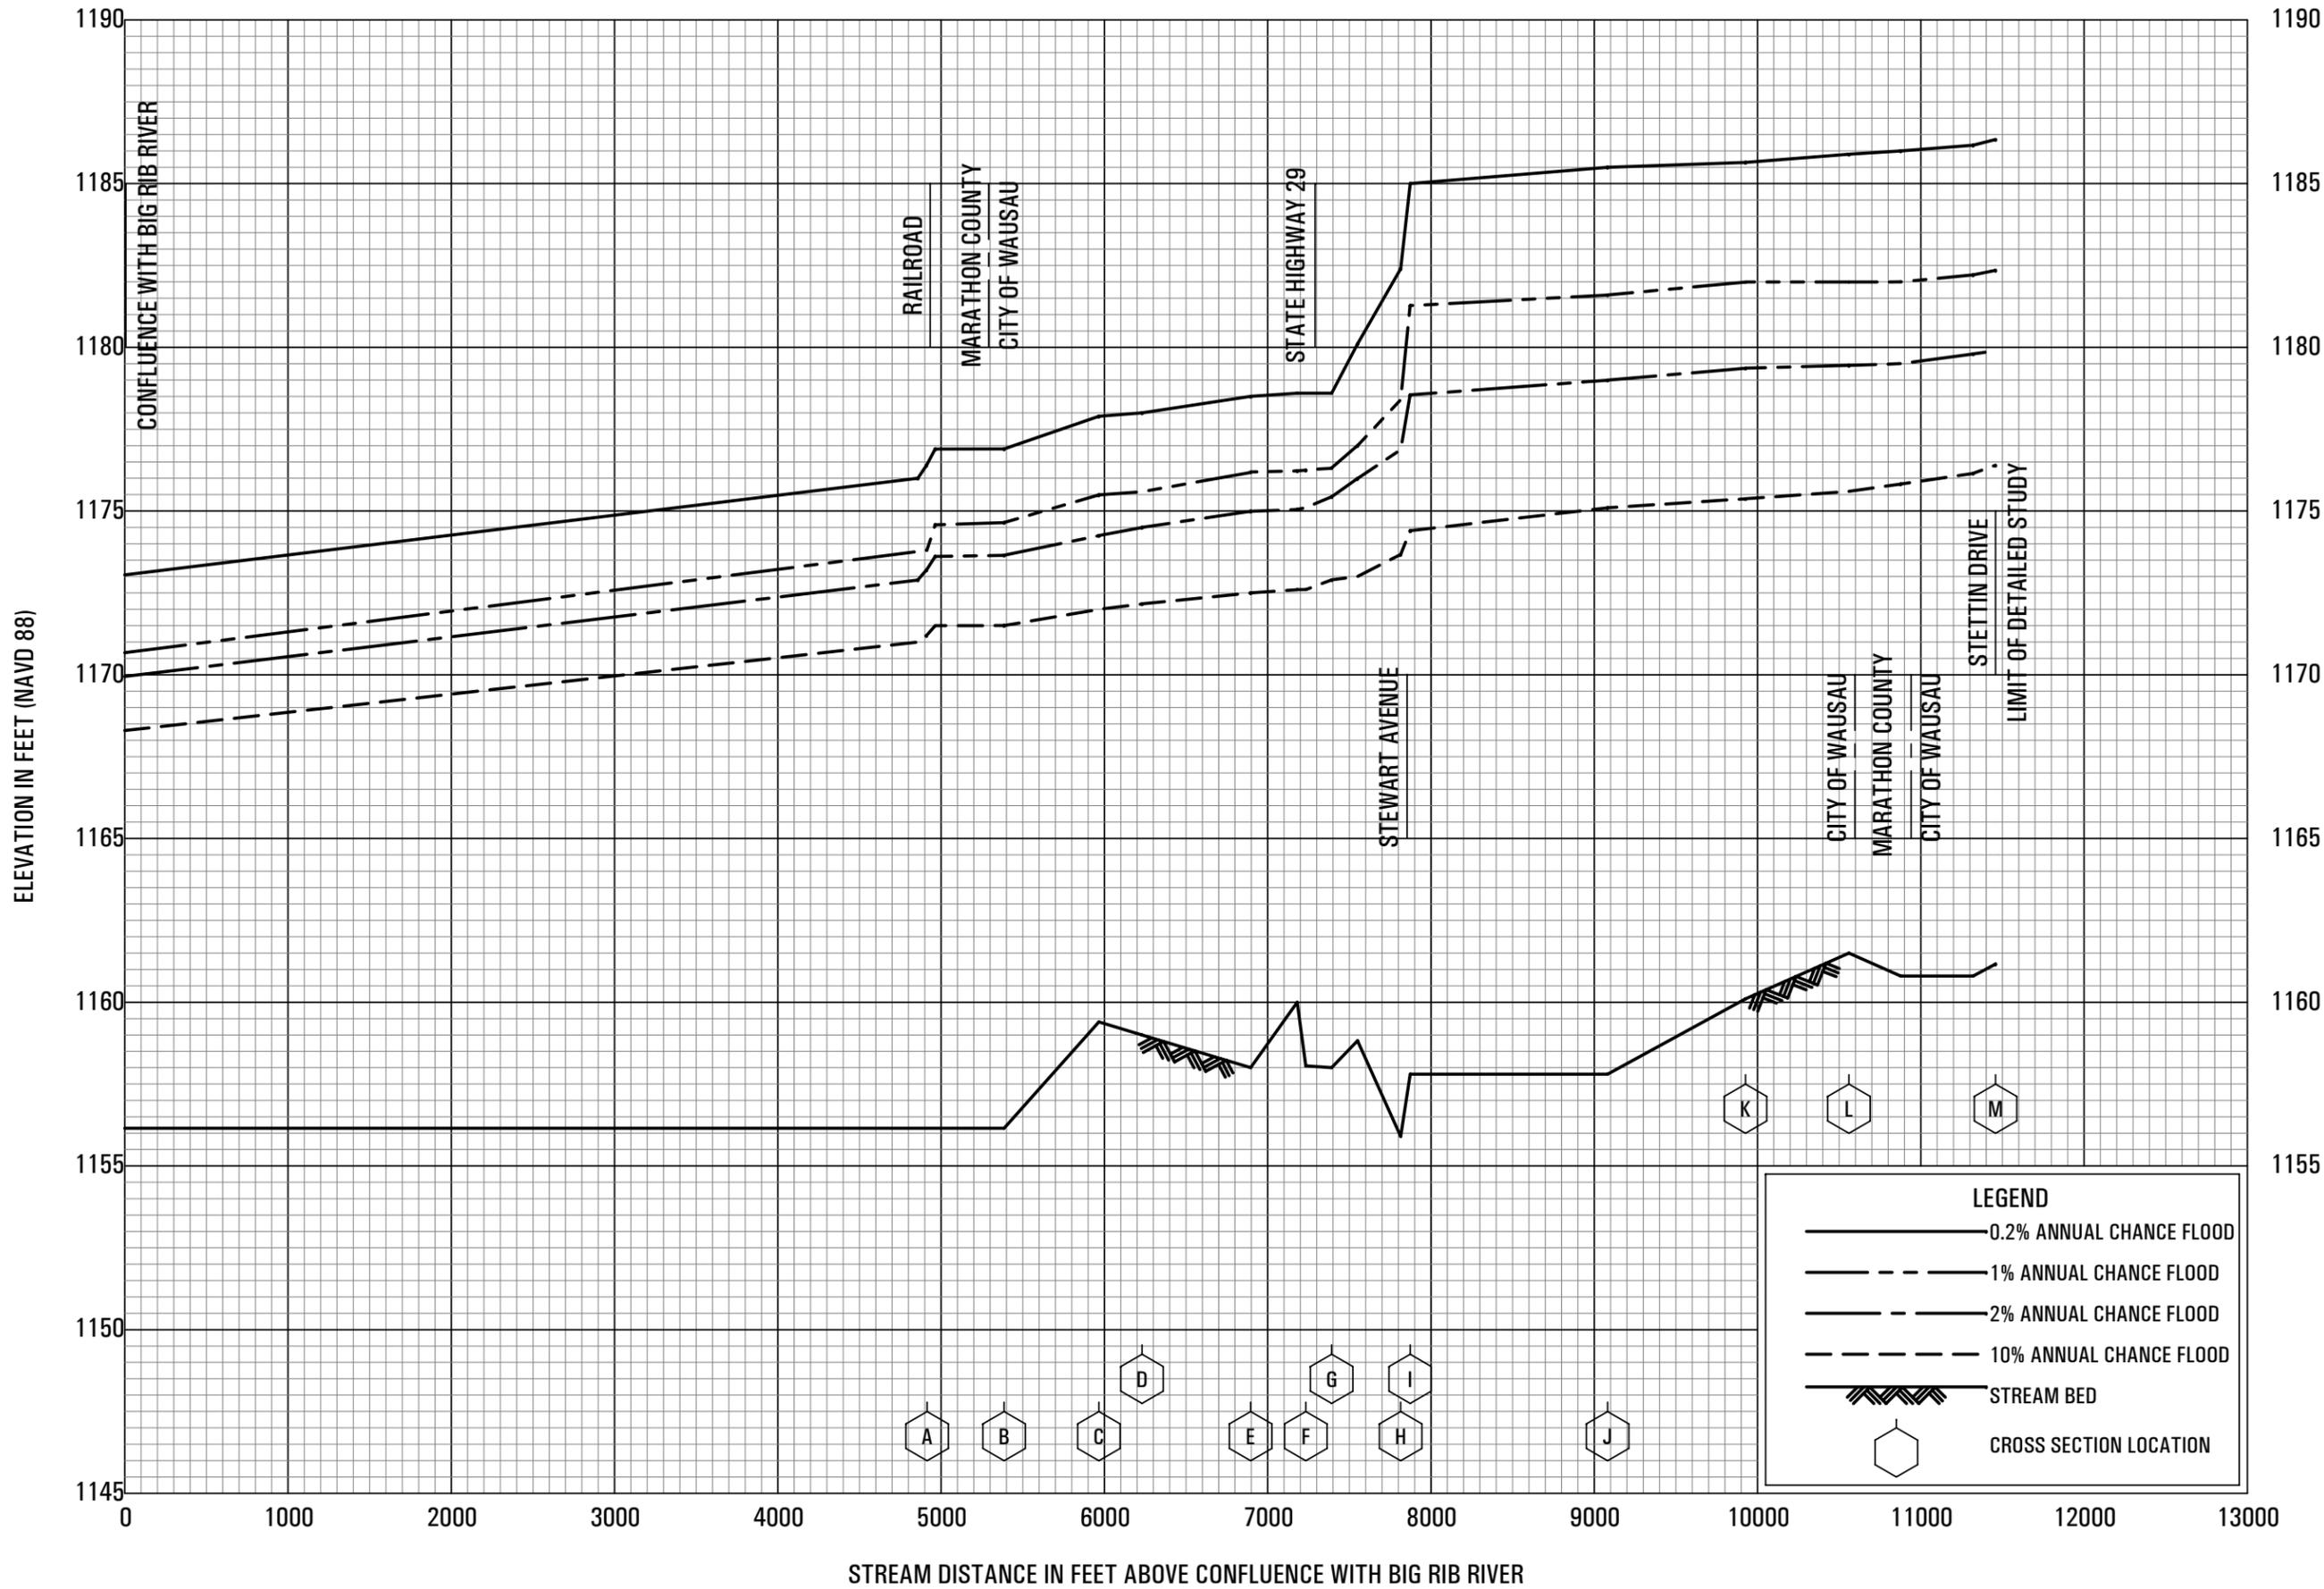

FLOOD PROFILES

LITTLE RIB RIVER

**FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS**

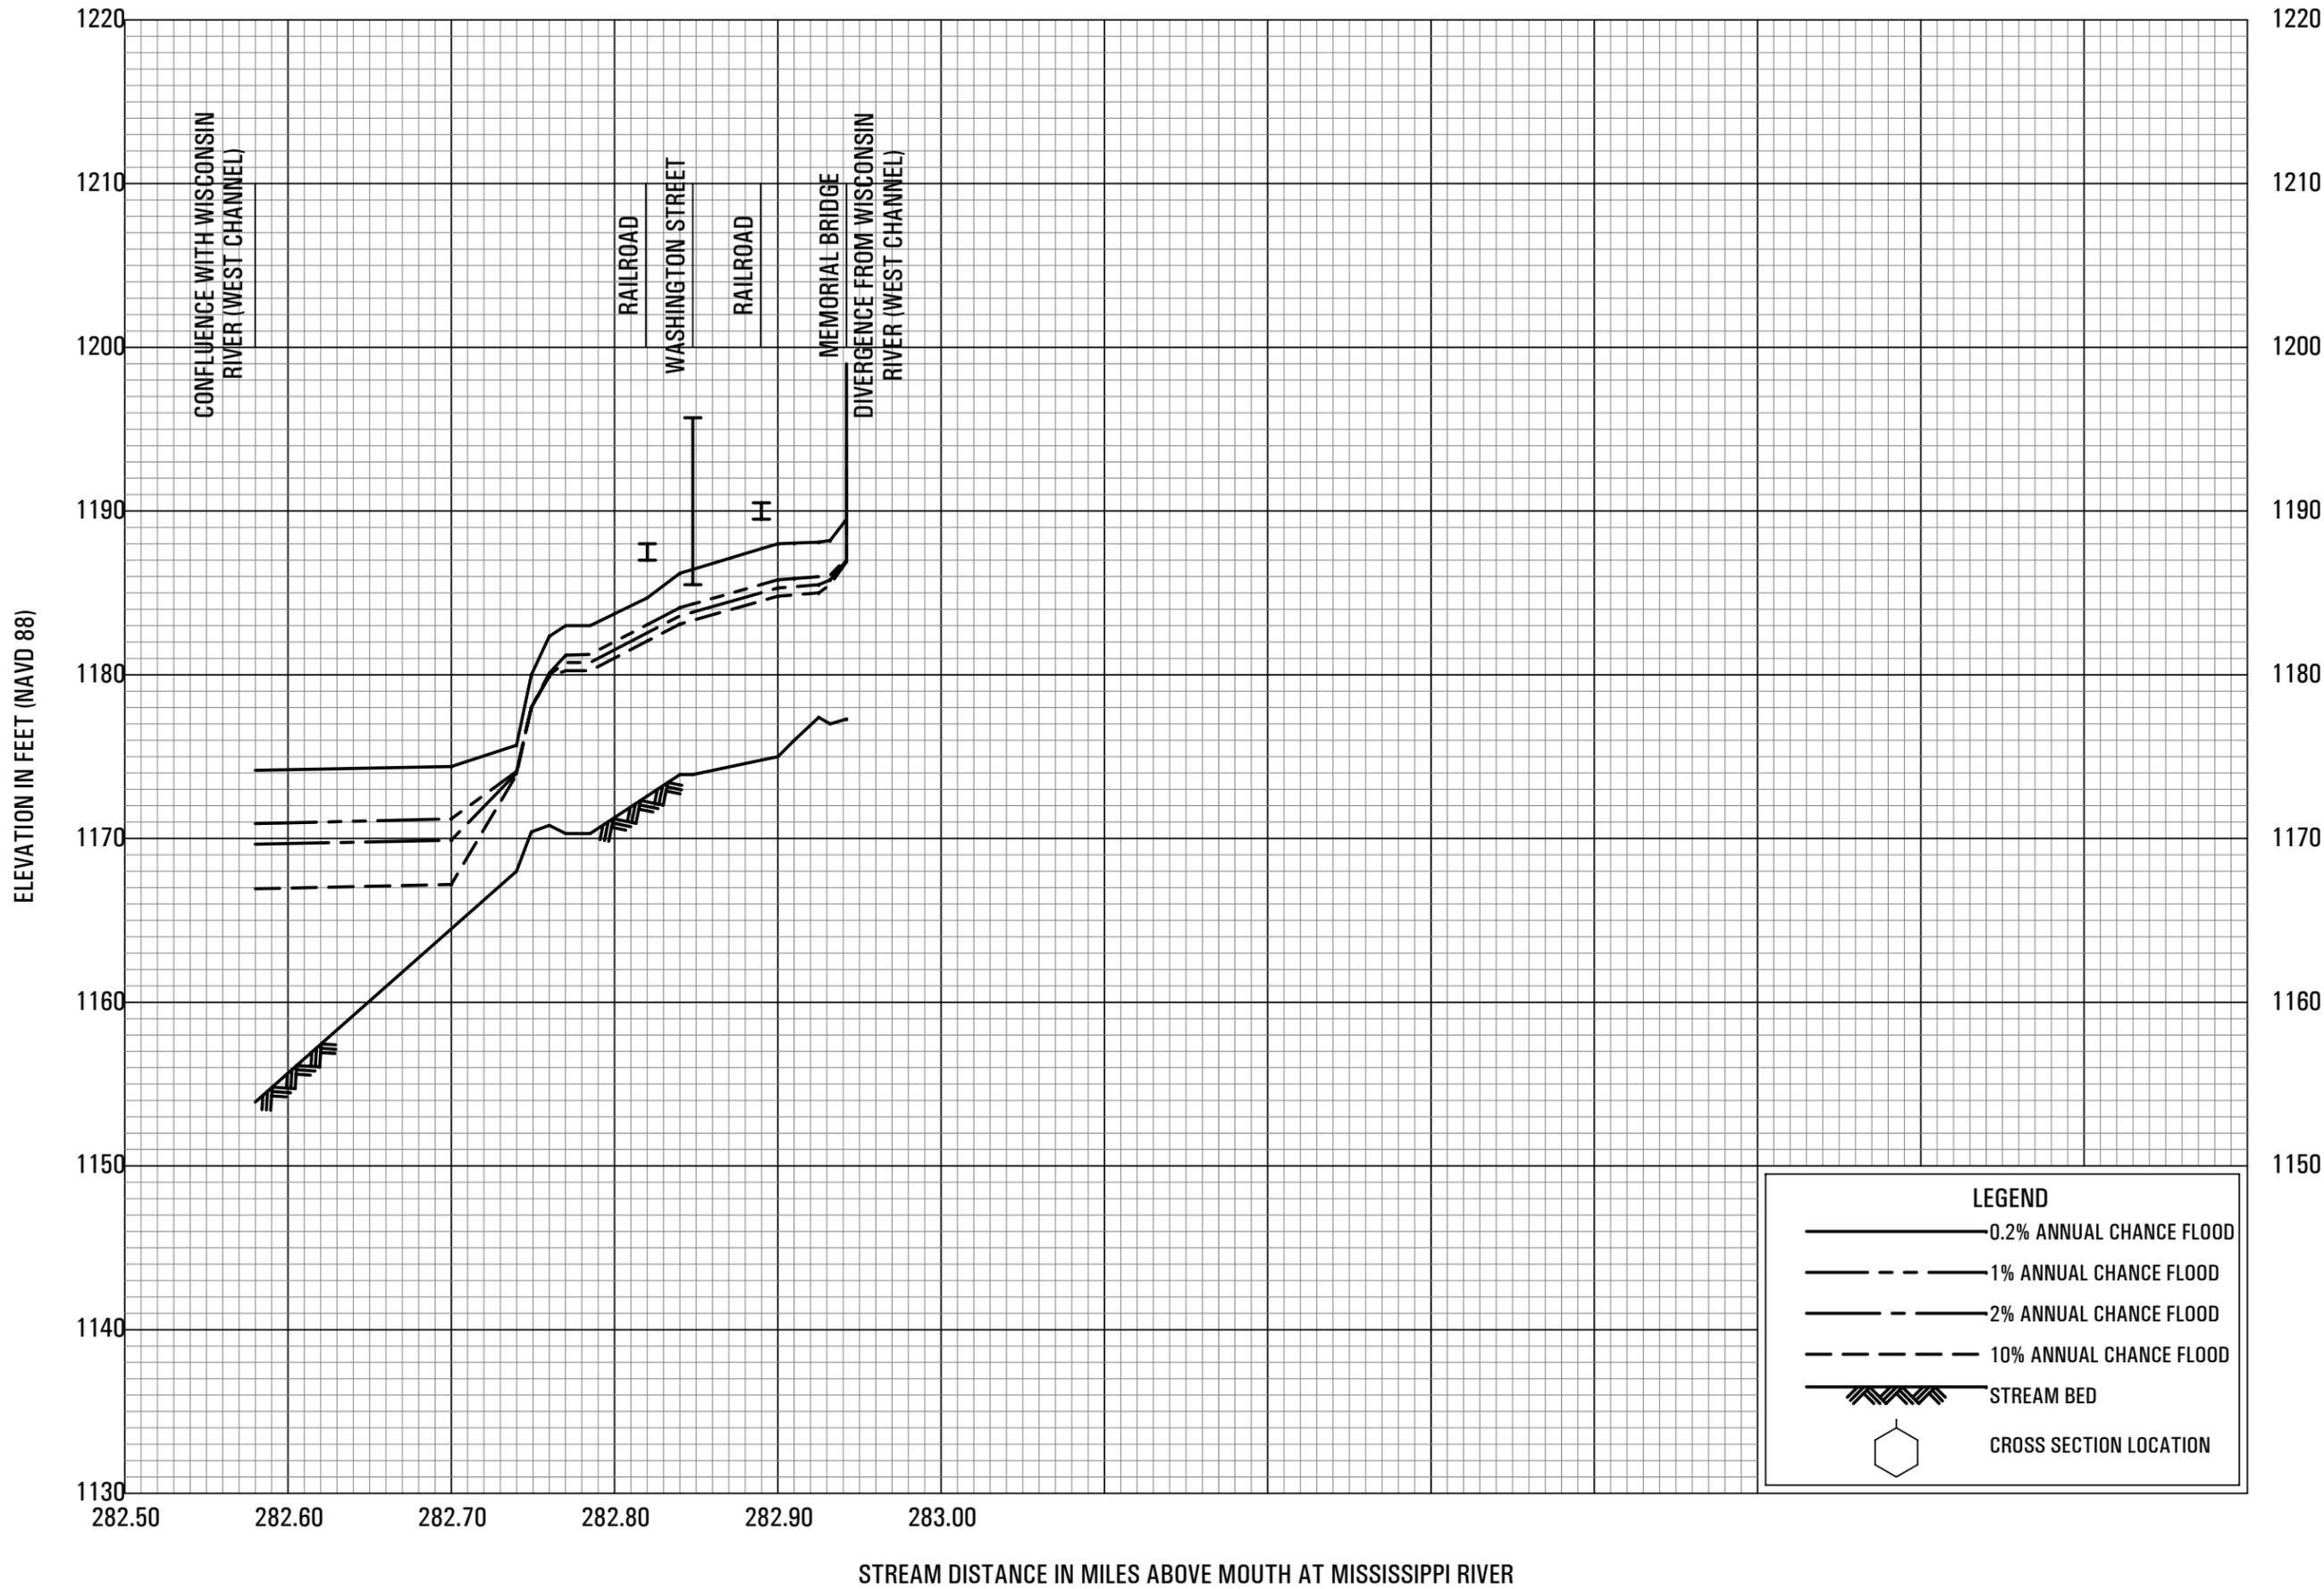

FLOOD PROFILES

WISCONSIN RIVER EAST CHANNEL

FEDERAL EMERGENCY MANAGEMENT AGENCY
MARATHON COUNTY, WI
AND INCORPORATED AREAS

28P